


High Rel Printed Circuit Mount Connector - Straight PC Tail



Receptacle



Plug

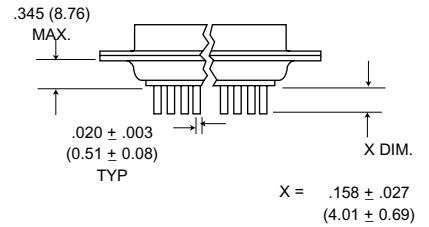

With .120 (3.15) Through-Mounting Holes

| Number Contacts (Shell Size) | | NM Non-Magnetic | | | |
|------------------------------|--|---------------------------|---------------|---------------|---------------|
| | | Receptacle | Receptacle | Plug | Plug |
| 78 (D) Standard | | DDMA50913-499 | - | DDMA50913-500 | - |
| 78 (D) Military | | DDMA50913-439 | DDMA50913-445 | DDMA50913-440 | DDMA50913-446 |


High Rel 90° PCB Connectors



Receptacle



Plug

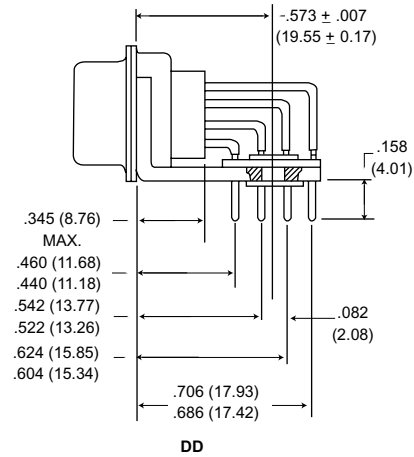

Connectors with brackets cannot be ordered with float mounts or clinch nuts.

| Number Contacts (Shell Size) | | NM Non-Magnetic | | | |
|------------------------------|--|---------------------------|---------------|---------------|---------------|
| | | Receptacle | Receptacle | Plug | Plug |
| 78 (0) Standard | | DDMA50913-467 | - | DDMA50913-468 | - |
| 78 (0) Military | | DDMA50913-437 | DDMA50913-473 | DDMA50913-438 | DDMA50913-474 |

High Rel Crimp Contacts

| Contact Size | Wire Size Accommodation | Cannon Part Number | | | |
|--------------|-------------------------|--------------------|---------|-------------|--------------|
| | | M39029 | M24308* | Pin | Socket |
| 22D Pin | 22, 24, 26, 28 | /58-360 | /13-1 | 030-2042-00 | - |
| 22D Socket | 22, 24, 26, 28 | /57-354 | /12-1 | - | 031-1147-000 |

* Superseded by M39029