


# FMOPC8 FMOEC8 SERIES

+5.0, +3.3 or -5.2, Vdc  
PECL & ECL Clock Oscillators

## 8 PIN DIP

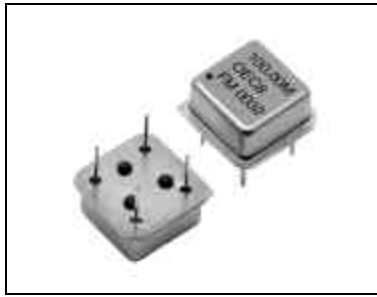


- ECL and PECL Voltage Options
- High Frequency Range
- Low Noise
- SMD Gull Wing Available

### SPECIFICATIONS

Parameter	PECL	Specification	ECL
Frequency Range	30.0 - 160.0 MHz		
Overall Frequency Tolerance	±20 ppm to ±100 ppm (Inclusive of Operating Temp., Supply Voltage and Load)		
Operating Temperature Range	0 to +70° C Std. (See Temp. Range Options)		
Storage Temperature	-55° to +125° C		
Supply Voltage (Vdd)	+5.0 Vdc (±0.5 Vdc) +3.3 Vdc (±0.3 Vdc)	-5.2 Vdc (±0.5Vdc) (See Voltage Options)	
Supply Current	70 mA max. (+5.0 Vdd) 60 mA max. (+3.3 Vdd)	70 mA max. (-5.2 Vdd)	
Symmetry (Duty Cycle)	40/60% Std., 45/55% Avail. (See Spec. Options S)		
Logic Type	PECL / ECL squarewave, 100K Compatible		
Output Load*	330 ohms to Vee. 50 ohms to -2 Vcd., ref. to Vdd. (See Test Circuits pg. 49)		
Output "0" Level (VOL)	(Vdd - 1.60 Vdc) max. -1.62 Vdc max.		
Output "1" Level (VOH)	(Vdd - 1.02 Vdc) min. -1.02 Vdc min.		
Rise and Fall Time	2nS max.		
Pin 1 Options (See Spec Options N, C, T below and add option letter in part number)	Pin 1: No Connection (N) Pin 1: Complementary Output (C) Pin 1: Tri-State (T) Tri-State Enable Low Level, (VIL -1.60) Vdc Max. Tri-State Disable High Level, (VIH -1.02) Vdc Min. When oscillator is disabled, the output is in a low state (VOL).		
Aging @ 25° C	±5ppm max first year		

All specifications subject to change without notice.

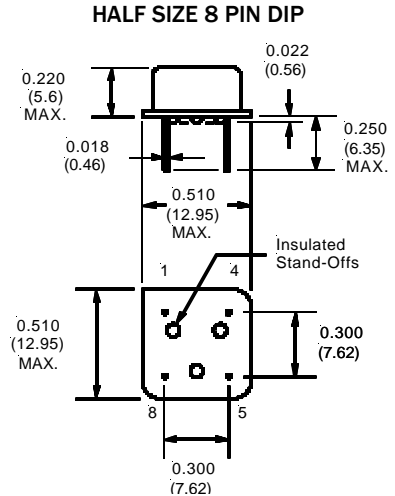

PIN FUNCTION TABLE

Pin	Function
1	See Pin 1 Options
7	Vee (Case Ground)
8	Output
14	Vdd (Supply Voltage)

\*Other ECL and PECL Output Load and Pin Function configurations are available upon request.


NOTE: Waveforms & Test Circuits on pages 48, 49

Standard Specifications for product indicated in color

Dimensions:  $\frac{\text{Inches}}{\text{(mm)}}$

### PART NUMBERING SYSTEM

MARKING: See Page 57, Format H

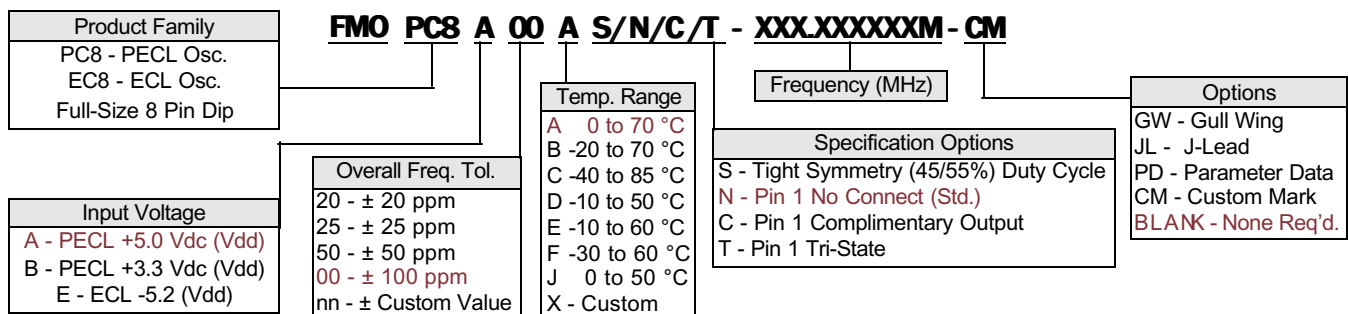

15302 Bolsa Chica St., Huntington Beach, CA. 92649  
Tel: 714-892-3234 Fax: 714-890-1832  
E-mail: sales@frequencymanagement.com  
www.frequencymanagement.com

1-800-800-XTAL  
(9825)  
www.DataSheet4U.com