

SPECIFICATIONS

HEADER

Mechanical

Contact And Solder Pad Retention Force: 1.0kgf min .per pin.

**HS87 SERIES
SMT CONN**

Electrical

Voltage Rating: 600V

Current Rating: 1.0A MAX.

Dielectric Withstanding Voltage: 1800V AC/ 1 min.

Insulation Resistance: 1000MΩ min.


Physical

Housing: High Thermoplastic, UL 94V-0 rating in Natural color


Contact: Copper Alloy.

Plating: See "ORDERING INFORMATION"

Operating Temperature: -40°C to +105°C



DRAWING

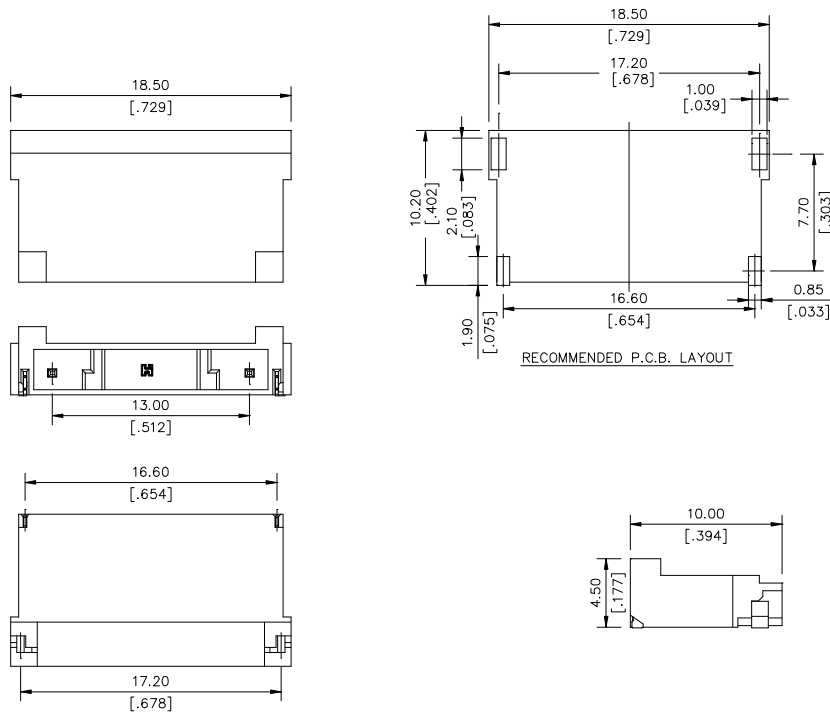

ORDERING INFORMATION

PRODUCT No. : H S 87 02 0 - 7 H

