

HTT1A80AS

3 Quadrants 1A TRIAC

FEATURES

- Repetitive Peak Off-State Voltage : 1000V
- R.M.S On-State Current ($I_{T(RMS)} = 1A$)
- Gate Trigger Current : 10mA
- $dV/dt \geq 600V/\mu s$

General Description



Intended for use in AC static switching and industrial control systems, driving low power highly inductive load like solenoid, pump, fan and micro-motor.

$$V_{DRM} = 1000 V$$

$$I_{T(RMS)} = 1 A$$

$$I_{TSM} = 11 A$$

$$I_{GT} = 10mA$$

Symbol

SOT-223


Absolute Maximum Ratings ($T_J=25^\circ C$ unless otherwise specified)

Symbol	Parameter	Conditions	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage	Sine wave, 50/60Hz, Gate open	1000	V
V_{RRM}	Repetitive Peak Reverse Voltage		1000	V
V_{DSM}	Non-Repetitive Surge Peak Off-State Voltage		1100	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage		1100	V
$I_{T(RMS)}$	R.M.S. On-State Current	Full sine wave, $T_C = 57^\circ C$	1	A
I_{TSM}	Non-Repetitive Surge Peak On-State Current	Full sine wave, 50Hz/60Hz	10/11	A
I^2t	Fusing Current	$t = 10ms$	1.12	A ² S
P_{GM}	Forward Peak Gate Power Dissipation	$T_J = 125^\circ C$	1	W
$P_{G(AV)}$	Forward Average Gate Power Dissipation	$T_J = 125^\circ C$	1	W
I_{GM}	Peak Gate Current	$tp=20\mu s, T_J = 125^\circ C$	1	A
T_J	Operating Junction Temperature		-40~+125	$^\circ C$
T_{STG}	Storage Temperature		-40~+150	$^\circ C$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit	
I_{DRM}	Repetitive Peak Off-State Current	$V_D = V_{\text{DRM}}$	$T_J=25^\circ\text{C}$	-	-	10	μA
			$T_J=125^\circ\text{C}$	-	-	500	μA
I_{RRM}	Repetitive Peak Reverse Current	$V_R = V_{\text{RRM}}$	$T_J=25^\circ\text{C}$	-	-	10	μA
			$T_J=125^\circ\text{C}$	-	-	500	μA
I_{GT}	Gate Trigger Current	$V_D = 12\text{V}, R_L=30\Omega$	1+	-	-	6	mA
			1-, 3-	-	-	10	mA
V_{GT}	Gate Trigger Voltage	$V_D = 12\text{V}, R_L=30\Omega$	1+, 1-, 3-	-	-	1.5	V
V_{GD}	Non-Trigger Gate Voltage	$V_D = 2/3 V_{\text{DRM}}, R_L=3.3\text{K}\Omega,$ $T_J=125^\circ\text{C}$	0.2	-	-	V	
I_L	Latching Current	$I_G = 1.2 I_{\text{GT}}$	1+, 3-	-	-	15	mA
			1-	-	-	25	mA
I_H	Holding Current	$I_T = 100\text{mA}$	-	-	10	mA	
V_{TM}	Peak On-State Voltage	$I_T = 1.4\text{A}, t_p = 380\mu\text{s}$	-	-	1.5	V	
dv/dt	Critical Rate of Rise of Off-State Voltage	$V_D = 2/3 V_{\text{DRM}},$ Gate open, $T_J=125^\circ\text{C}$	600	-	-	V/us	

Thermal Characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$R_{\theta\text{JC}}$	Thermal Resistance	Junction to Case			40	$^\circ\text{C/W}$

Typical Characteristics

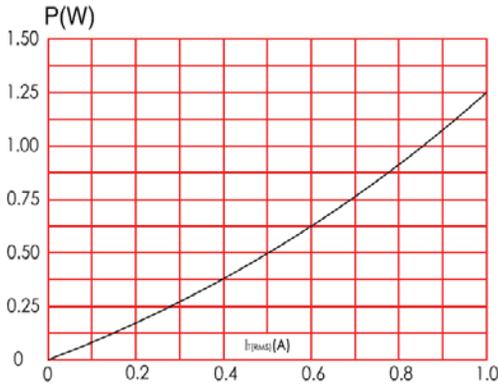


Fig 1. R.M.S. current vs. Power dissipation

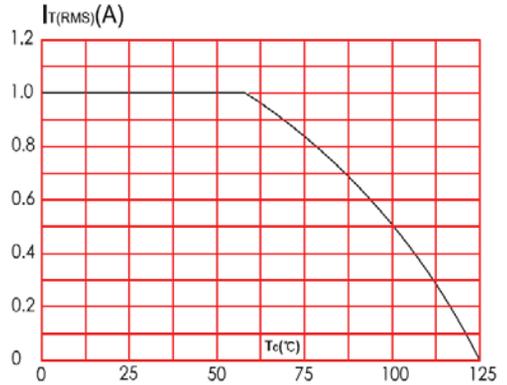


Fig 2. R.M.S. current vs. Case temperature

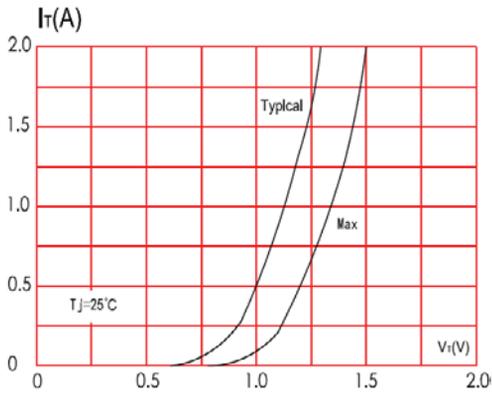


Fig 3. Surge on state characteristics

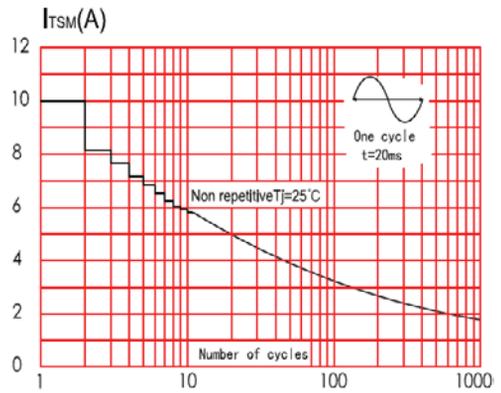


Fig 4. Surge on state current rating

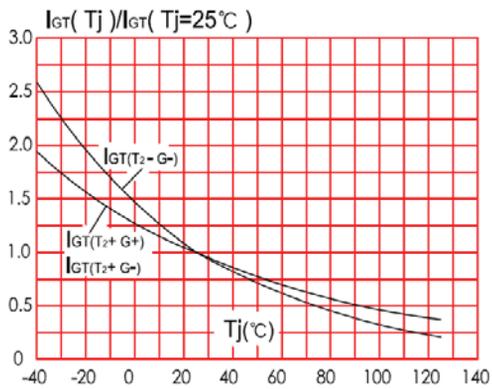


Fig 5. Gate trigger current vs. junction temperature


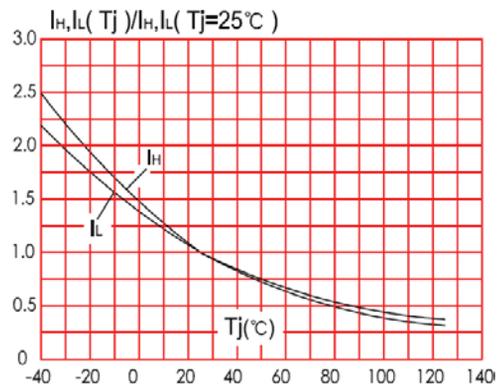


Fig 6. Holding and latching current vs. junction temperature

Package Dimension

SOT-223

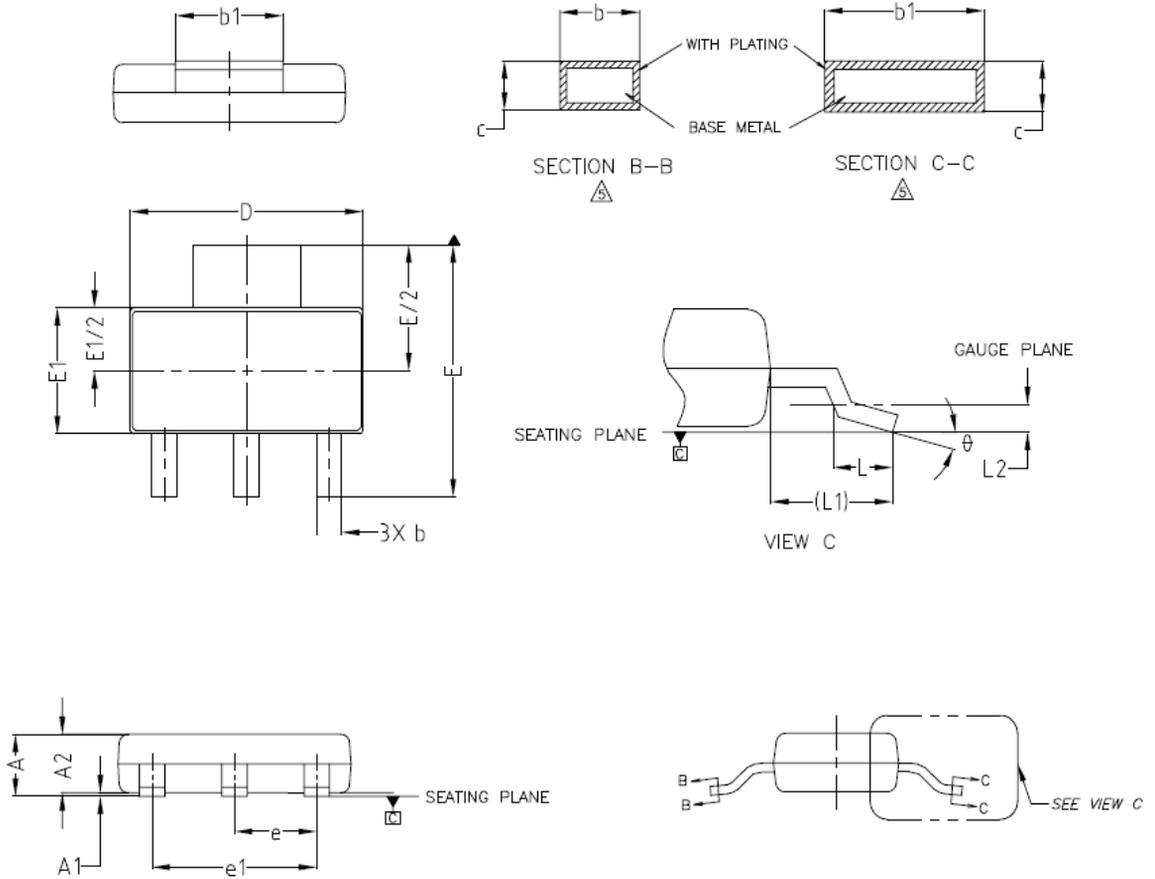

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	—	—	1.80	
A1	0.00	—	0.10	
A2	1.60	1.65	1.70	
b	0.68	—	0.76	5
b1	2.95	—	3.07	5
c	0.23	—	0.28	5
D	6.40	6.50	6.60	2,3
E	6.80	7.00	7.20	
E1	3.40	3.50	3.60	2,3
e	2.30 BSC			
e1	4.60 BSC			
L	0.45	—	0.65	
L1	1.75 REF			
L2	0.10 BSC			
θ	0°	—	10°	
θ1	5°	—	10°	