


SMT Power Inductor


SIG201612H Type

Features

- RoHS compliant.
- Halogen free compliant.
- Low profile (1.2mm max. height), SMD type.
- Shielded
- Self-leads, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



Mechanical Dimension:

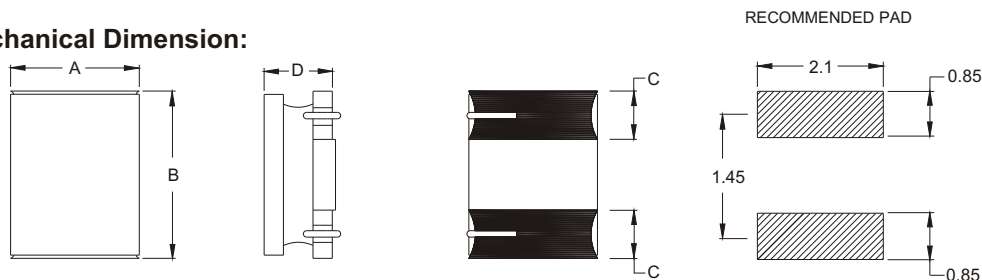

UNIT:mm/inch
 A = 1.60 ± 0.1 / 0.063 ± 0.004
 B = 2.00 ± 0.1 / 0.079 ± 0.004
 C = 0.60 ± 0.2 / 0.024 ± 0.008
 D = 1.20 / 0.047 Max.

Electrical Characteristics: 25°C: 1.0 MHz, 1.0V

PART NO.	L ¹ (uH)	DCR (mΩ)		Isat ² (Adc) TYP.	Ir ³ (Adc)
		Typical	Max.		
SIG201612H - 1R5	1.5	124	149	1.95	1.44
SIG201612H - 2R2	2.2	154	185	1.26	1.29
SIG201612H - 3R3	3.3	213	256	1.10	1.10
SIG201612H - 4R7	4.7	280	336	0.90	0.96
SIG201612H - 6R8	6.8	399	479	0.73	0.80
SIG201612H - 8R2	8.2	481	577	0.71	0.73
SIG201612H - 100	10.0	528	634	0.63	0.70

* : If you require another part number please contact with us.

** : All test data is referenced to 25°C ambient.

Note1. : Inductance tolerance ± 20%.

Note2. : Isat : DC current (A) that will cause Lo to drop approximately 30%.

Note3. : Idc : DC current (A) that will cause an approximate ΔT of 40°C.

Note4. : Operating temperature range -55°C to +125°C.

Note5. : The part temperature (ambient + temp rise) should not exceed 125°C under worse case operating.

Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note6. : The rated current as listed is either the saturation current or the heating current depending on Which value is lower.



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

http://www.deltawww.com