


**MECHANICAL DATA**  
 Dimensions in mm (inches)

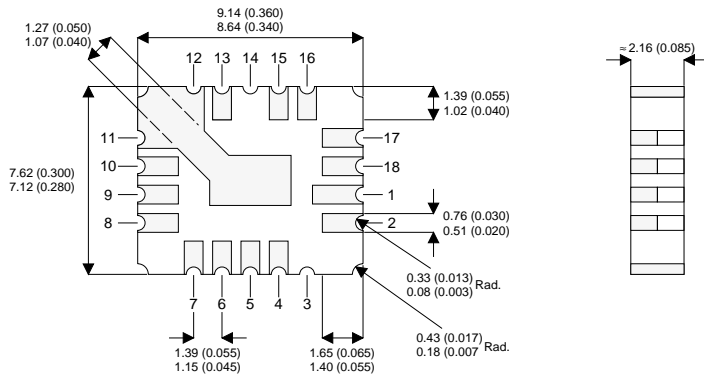

**LCC4 PACKAGE**

- Pins 4,5                                 –  $V_{IN}$
- Pins 6,7,8,9,10,11,12,13         –  $V_{OUT}$
- Pins 15,16,17,18,1,2               – GND

**ORDERING INFORMATION**

- IP78M05A-LCC4                       +ve 5V 1% regulator
- IP78M05 -LCC4                       +ve 5V regulator
- IP78M12A-LCC4                       +ve 12V 1% regulator
- IP78M12 -LCC4                       +ve 12V regulator
- IP78M15A-LCC4                       +ve 15V 1% regulator
- IP78M15 -LCC4                       +ve 15V regulator

**0.5 AMP**  
**POSITIVE**  
**VOLTAGE REGULATOR**  
**IN A CERAMIC SURFACE**  
**MOUNT PACKAGE**

**FEATURES**

- **OUTPUT CURRENT UP TO 0.5A**
- **OUTPUT VOLTAGES OF 5, 12, 15V**
- **0.01% / V LINE REGULATION**
- **0.3% / A LOAD REGULATION**
- **THERMAL OVERLOAD PROTECTION**
- **SHORT CIRCUIT PROTECTION**
- **OUTPUT TRANSISTOR SOA PROTECTION**
- **1% VOLTAGE TOLERANCE (–A VERSIONS)**

**DESCRIPTION**

The IP78M00A series of voltage regulators are fixed output regulators intended for local, on-card voltage regulation. These devices are available in 5, 12, and 15 volt options and are capable of delivering in excess of 500mA over temperature.

The A-suffix devices are fully specified at 0.5A, provide 0.01% / V line regulation, 0.3% / A load regulation, and  $\pm 1\%$  output voltage tolerance at room temperature. Protection features include safe operating area, current limiting and thermal shutdown.

**ABSOLUTE MAXIMUM RATINGS** ( $T_C = 25^\circ\text{C}$  unless otherwise stated)

$V_I$	DC Input Voltage	(for $V_O = 5, 12, 15\text{V}$ )	35V
$I_O$	Output Current		Internally limited
$P_D$	Power Dissipation		Internally limited
$T_J$	Operating Junction Temperature Range		$-55$ to $150^\circ\text{C}$
$T_{stg}$	Storage Temperature		$-65$ to $150^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS**

Parameter	Test Conditions	IP78M05A-LCC4			IP78M05-LCC4			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
V <sub>O</sub> Output Voltage	I <sub>O</sub> = 100mA V <sub>IN</sub> = 10V	4.95	5	5.05	4.8	5	5.2	V
	I <sub>O</sub> = 5mA to 350mA P <sub>D</sub> ≤ P <sub>MAX</sub> V <sub>IN</sub> = 7.5V to 20V T <sub>J</sub> = -55 to 150°C	4.85		5.15	4.75		5.25	
ΔV <sub>O</sub> Line Regulation	I <sub>O</sub> = 200mA V <sub>IN</sub> = 7V to 25V V <sub>IN</sub> = 8V to 25V T <sub>J</sub> = -55 to 150°C		3	10			50	mV
			3	10			25	
	I <sub>O</sub> = 500mA V <sub>IN</sub> = 8V to 12V		3	10			50	
ΔV <sub>O</sub> Load Regulation	I <sub>O</sub> = 5mA to 500mA V <sub>IN</sub> = 10V T <sub>J</sub> = -55 to 150°C		5	50			50	mV
I <sub>Q</sub> Quiescent Current	V <sub>IN</sub> = 10V I <sub>O</sub> = 350mA T <sub>J</sub> = -55 to 150°C		4	6		4	6	mA
ΔI <sub>Q</sub> Quiescent Current Change	I <sub>O</sub> = 5mA to 500mA V <sub>IN</sub> = 10V T <sub>J</sub> = -55 to 150°C		0.1	0.5			0.5	mA
	I <sub>O</sub> = 200mA V <sub>IN</sub> = 8V to 25V T <sub>J</sub> = -55 to 150°C		0.2	0.8			0.8	
V <sub>N</sub> Output Noise Voltage	f = 10Hz to 100kHz		40	200		40	200	μV
ΔV <sub>IN</sub> / ΔV <sub>O</sub> Ripple Rejection	f = 120Hz I <sub>O</sub> = 300mA	65	80		62			dB
	V <sub>IN</sub> = 8V to 18V I <sub>O</sub> = 100mA T <sub>J</sub> = -55 to 150°C	65	80		62			
Dropout Voltage	I <sub>O</sub> = 350mA		2	2.5			2.5	V
I <sub>sc</sub> Short Circuit Current	V <sub>IN</sub> = 35V		300	600		300	600	mA
I <sub>pk</sub> Peak Output Current	V <sub>IN</sub> = 10V	0.7	1.0	1.4	0.7	1.0	1.6	A
Average Temperature Coefficient of V <sub>O</sub>	I <sub>O</sub> = 5mA		0.5	2.0		0.5		mV/°C
R <sub>θJC</sub> Thermal Resistance Junction to Case				13			13	°C/W

- 1) All characteristics are measured with a capacitor across the input of 0.22μF and a capacitor across the output of 0.1μF.  
All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques (t<sub>p</sub> ≤ 10ms, δ ≤ 5%). Output voltage changes due to changes in internal temperature must be taken into account separately.

**ELECTRICAL CHARACTERISTICS**

Parameter	Test Conditions	IP78M12A-LCC4			IP78M12-LCC4			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
$V_O$ Output Voltage	$I_O = 100\text{mA}$ $V_{IN} = 19\text{V}$	11.88	12	12.12	11.50	12	12.50	V
	$I_O = 5\text{mA to } 350\text{mA}$ $P_D \leq P_{MAX}$ $V_{IN} = 14.8\text{V to } 27\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	11.64		12.36	11.40		12.60	
$\Delta V_O$ Line Regulation	$I_O = 200\text{mA}$ $V_{IN} = 14.5\text{V to } 30\text{V}$ $V_{IN} = 16\text{V to } 30\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$		4	18			60	mV
			4	18			30	
	$I_O = 500\text{mA}$ $V_{IN} = 16\text{V to } 22\text{V}$		4	18			120	
$\Delta V_O$ Load Regulation	$I_O = 5\text{mA to } 500\text{mA}$ $V_{IN} = 19\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$		10	60			120	mV
$I_Q$ Quiescent Current	$V_{IN} = 19\text{V}$ $I_O = 350\text{mA}$ $T_J = -55 \text{ to } 150^\circ\text{C}$		4	6		4	6	mA
$\Delta I_Q$ Quiescent Current Change	$I_O = 5\text{mA to } 500\text{mA}$ $V_{IN} = 19\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$		0.1	0.5			0.5	mA
	$I_O = 200\text{mA}$ $V_{IN} = 14.8\text{V to } 30\text{V}$ $T_J = -55 \text{ to } 150^\circ\text{C}$		0.2	0.8			0.8	
$V_N$ Output Noise Voltage	$f = 10\text{Hz to } 100\text{kHz}$		75	480		75	480	$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$ Ripple Rejection	$f = 120\text{Hz}$ $V_{IN} = 15\text{V to } 25\text{V}$	$I_O = 300\text{mA}$	58	72			55	dB
		$I_O = 100\text{mA}$ $T_J = -55 \text{ to } 150^\circ\text{C}$	58	72			55	
Dropout Voltage	$I_O = 350\text{mA}$		2	2.5			2.5	V
$I_{SC}$ Short Circuit Current	$V_{IN} = 35\text{V}$		300	600		300	600	mA
$I_{pk}$ Peak Output Current	$V_{IN} = 19\text{V}$	0.7	1.0	1.4	0.7	1.0	1.6	A
Average Temperature Coefficient of $V_O$	$I_O = 5\text{mA}$		1.2	4.8		1.2		$\text{mV}/^\circ\text{C}$
$R_{\theta JC}$ Thermal Resistance Junction to Case				13			13	$^\circ\text{C/W}$

1) All characteristics are measured with a capacitor across the input of 0.22 $\mu\text{F}$  and a capacitor across the output of 0.1 $\mu\text{F}$ .

All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ( $t_p \leq 10\text{ms}$ ,  $\delta \leq 5\%$ ). Output voltage changes due to changes in internal temperature must be taken into account separately.

**ELECTRICAL CHARACTERISTICS**

Parameter	Test Conditions	IP78M15A-LCC4			IP78M15-LCC4			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
$V_O$ Output Voltage	$I_O = 100\text{mA}$ $V_{IN} = 23\text{V}$	14.85	15	15.15	14.40	15	15.60	V
	$I_O = 5\text{mA to } 350\text{mA}$ $P_D \leq P_{MAX}$ $V_{IN} = 18\text{V to } 30\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$	14.55		15.45	14.25		15.75	
$\Delta V_O$ Line Regulation	$I_O = 200\text{mA}$ $V_{IN} = 17.5\text{V to } 30\text{V}$ $V_{IN} = 20\text{V to } 30\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$	4	22		60		mV	
		4	22		30			
	$I_O = 500\text{mA}$ $V_{IN} = 20\text{V to } 26\text{V}$	4	22		150			
$\Delta V_O$ Load Regulation	$I_O = 5\text{mA to } 500\text{mA}$ $V_{IN} = 23\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$		12	75		150	mV	
$I_Q$ Quiescent Current	$V_{IN} = 23\text{V}$ $I_O = 350\text{mA}$ $T_J = -55\text{ to } 150^\circ\text{C}$		4	6		4	6	mA
$\Delta I_Q$ Quiescent Current Change	$I_O = 5\text{mA to } 500\text{mA}$ $V_{IN} = 23\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$		0.1	0.5			0.5	mA
	$I_O = 200\text{mA}$ $V_{IN} = 18\text{V to } 30\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$		0.2	0.8			0.8	
$V_N$ Output Noise Voltage	$f = 10\text{Hz to } 100\text{kHz}$		90	600		90	600	$\mu\text{V}$
$\frac{\Delta V_{IN}}{\Delta V_O}$ Ripple Rejection	$f = 120\text{Hz}$ $V_{IN} = 18.5\text{V to } 28.5\text{V}$ $T_J = -55\text{ to } 150^\circ\text{C}$	$I_O = 300\text{mA}$	57	70		54		dB
		$I_O = 100\text{mA}$	57	70		54		
Dropout Voltage	$I_O = 350\text{mA}$		2	2.5			2.5	V
$I_{SC}$ Short Circuit Current	$V_{IN} = 35\text{V}$		300	600		300	600	mA
$I_{pk}$ Peak Output Current	$V_{IN} = 23\text{V}$	0.7	1.0	1.4	0.7	1.0	1.6	A
Average Temperature Coefficient of $V_O$	$I_O = 5\text{mA}$		1.5	6.0		1.5		$\text{mV}/^\circ\text{C}$
$R_{\theta JC}$ Thermal Resistance Junction to Case				13			13	$^\circ\text{C/W}$

1) All characteristics are measured with a capacitor across the input of  $0.22\mu\text{F}$  and a capacitor across the output of  $0.1\mu\text{F}$ .

All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques ( $t_p \leq 10\text{ms}$ ,  $\delta \leq 5\%$ ). Output voltage changes due to changes in internal temperature must be taken into account separately.