

WEJ78L12 Three-terminal positive voltage regulator**FEATURES**

Maximum Output current

 I_{OM} : 0.1 A


Output voltage

 V_o : 12 V**SOT-89**

1. OUT

2. GND

3. IN

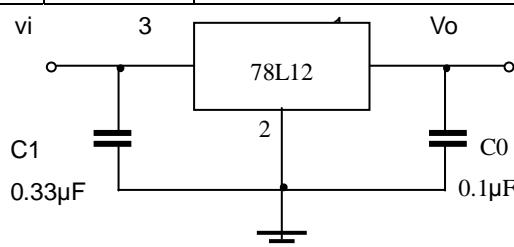
**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Units
Input Voltage	V_I	35	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-5~5~+150	°C

UTC78L05 ELECTRICAL CHARACTERISTICS

(VI=19V, IO=40mA, 0°C < Tj < 125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_j=25^\circ\text{C}$	11.5	12	12.5	V
		$14\text{V} \leq V_o \leq 27\text{V}, I_o=1\text{mA} \sim 40\text{mA}$	11.4	12	12.6	V
		$14.5\text{V} \leq V_o \leq V_{MAX}, I_o=1\text{mA} \sim 70\text{mA}$	11.4	12	12.6	V (note)
Load Regulation	ΔV_o	$T_j=25^\circ\text{C}, I_o=1\text{mA} \sim 100\text{mA}$		22	100	mV
		$T_j=25^\circ\text{C}, I_o=1\text{mA} \sim 40\text{mA}$		13	50	mV
Line regulation	ΔV_o	$14.5\text{V} \leq V_o \leq 27\text{V}, T_j=25^\circ\text{C}$		55	250	mV
		$16\text{V} \leq V_o \leq 27\text{V}, T_j=25^\circ\text{C}$		49	200	mV
Quiescent Current	I_q			4.3	6.5	mA
Quiescent Current Change	ΔI_q	$16\text{V} \leq V_o \leq 27\text{V}$			1.5	mA
	ΔI_q	$1\text{mA} \leq I_o \leq 40\text{mA}$			0.1	mA
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$		70		uV
Ripple Rejection	RR	$15\text{V} \leq V_o \leq 25\text{V}, f=120\text{Hz}, T_j=25^\circ\text{C}$	37	42		dB
Dropout Voltage	V_d	$T_j=25^\circ\text{C}$		1.7		V

TYPICAL APPLICATION

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.