

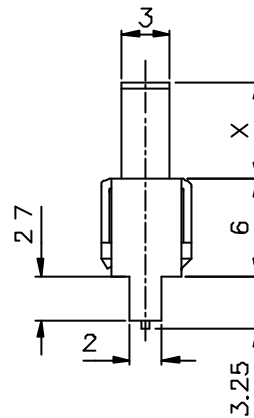
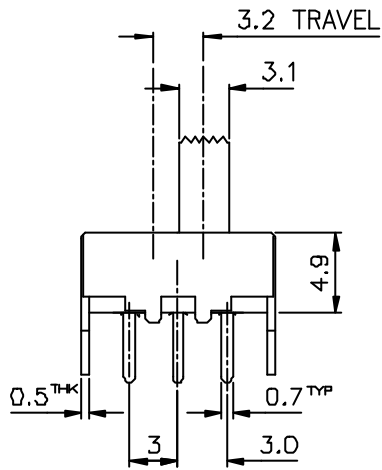


SCHEMATIC



X=

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 1P2T			
	RATING: DC 50V 0.5A	MODEL NO: SS-12F44-G(A)			
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: mm	DWN	FANG	31/3/97
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2.5 : 1	CHK'D		
	WITHSTAND VOLTAGE: AC 500V for 1 min	TOLERANCE: ±0.2	APPD.		
	OPERATION FORCE: 200±100g				
	SWITCHING LIFE: 10000cycles(15-18c/m unloading)				
BY:	PROMOTIVE INDUSTRIAL CO., LTD.			DRWG NO:	
DATE:	HONG KONG			820144-00	

The material contained in this drawing is the property of PIC. Any use other than that specifically authorized by PIC is prohibited. The above drawing is subjected to change for improvement without prior notice.