


SCHOTTKY DIODE

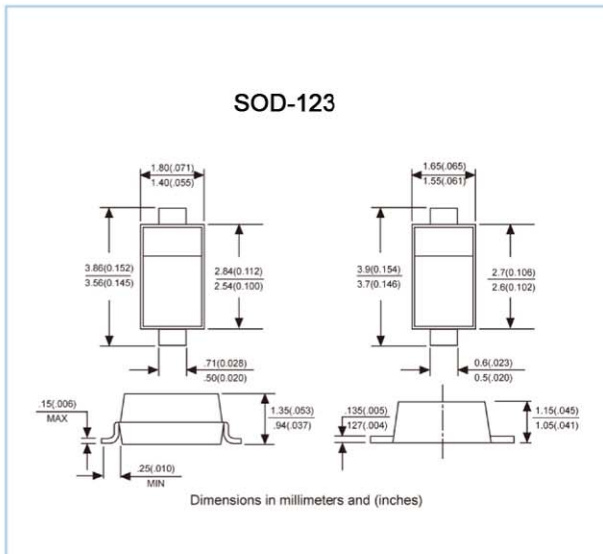

FEATURES

- ◆ For use in low voltage, high frequency inverters
- ◆ Free wheeling, and polarity protection applications

MECHANICAL DATA

Case: Molded plastic body
Terminals: Plated leads solderable per MIL-STD-750, Method 2026
Polarity: Polarity symbols marked on case
Marking: 72.

Maximum ratings and electrical characteristics, Single diode @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	TECHNICAL DATA	UNITS
Peak repetitive peak reverse voltage	V_{RRM}	20	V
Working peak reverse voltage	V_{RWM}		
DC Blocking voltage	V_R		
RMS Reverse voltage	$V_{R(RMS)}$	14	V
Average rectified output current	I_o	1	A
Peak forward surge current @ $t=8.3\text{ms}$	I_{FSM}	9	A
Repetitive peak forward current	I_{FRM}	1.5	A
Power dissipation	P_d	250	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	500	K/W
Storage temperature	T_{STG}	-40 to +125	$^{\circ}\text{C}$
Non-Repetitive peak reverse voltage	V_{RM}	20	V







Electrical ratings @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions
Reverse breakdown voltage	$V_{(BR)}$	20		V	$I_R=1\text{mA}$
Reverse voltage leakage current	I_R		1	mA	$V_R=20\text{V}$
Forward voltage	V_F		0.45	V	$I_F=1\text{A}$
Diode capacitance	C_D		120	pF	$V_R=4\text{V}, f=1.0\text{MHz}$

SK MAKE CONSCIOUS PRODUCT

CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE



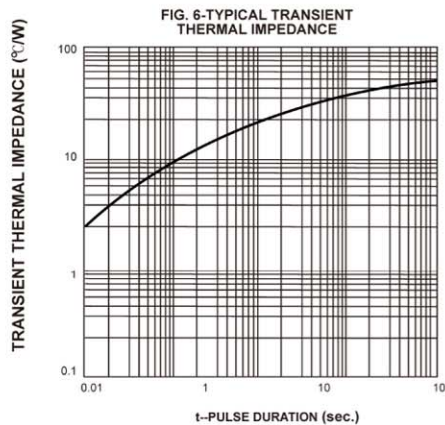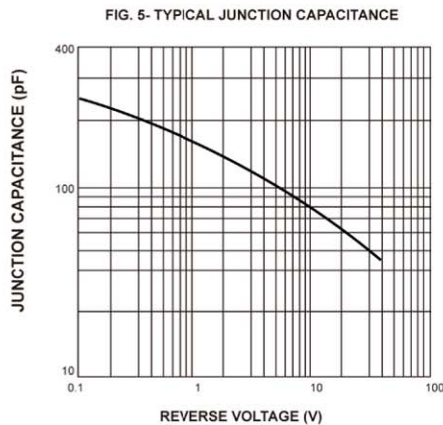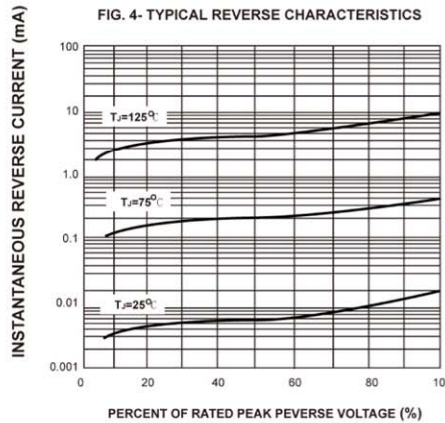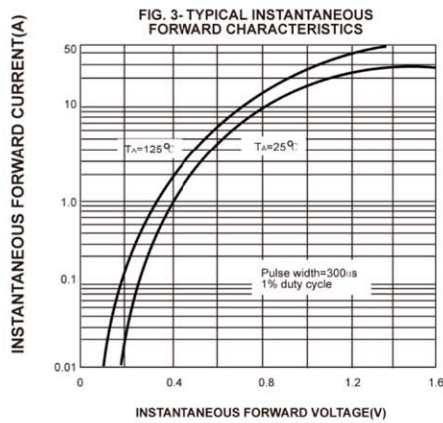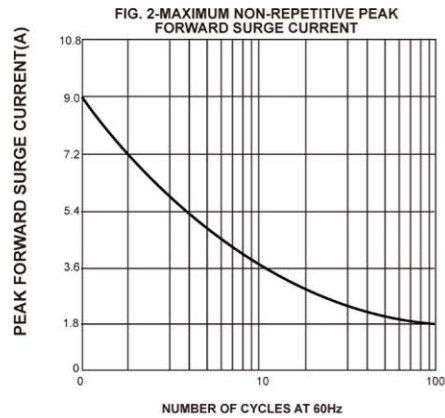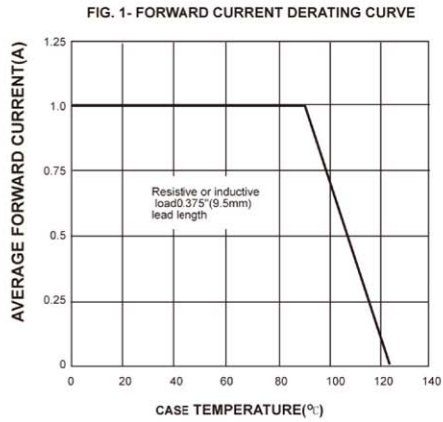

SK MAKE CONSCIOUS PRODUCT
 CONSCIOUS PRODUCTS BEGIN WITH CONSCIOUS PEOPLE

