


RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	<ON>
2-3	OPEN	2-1

<ON>=MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC max.
- ▲ 5. FIXED TERMINAL/MOVING CONTACT:  
Copper Alloy W/GOLD Plate over Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C
10. ▲ DENOTES CRITICAL PARAMETER.

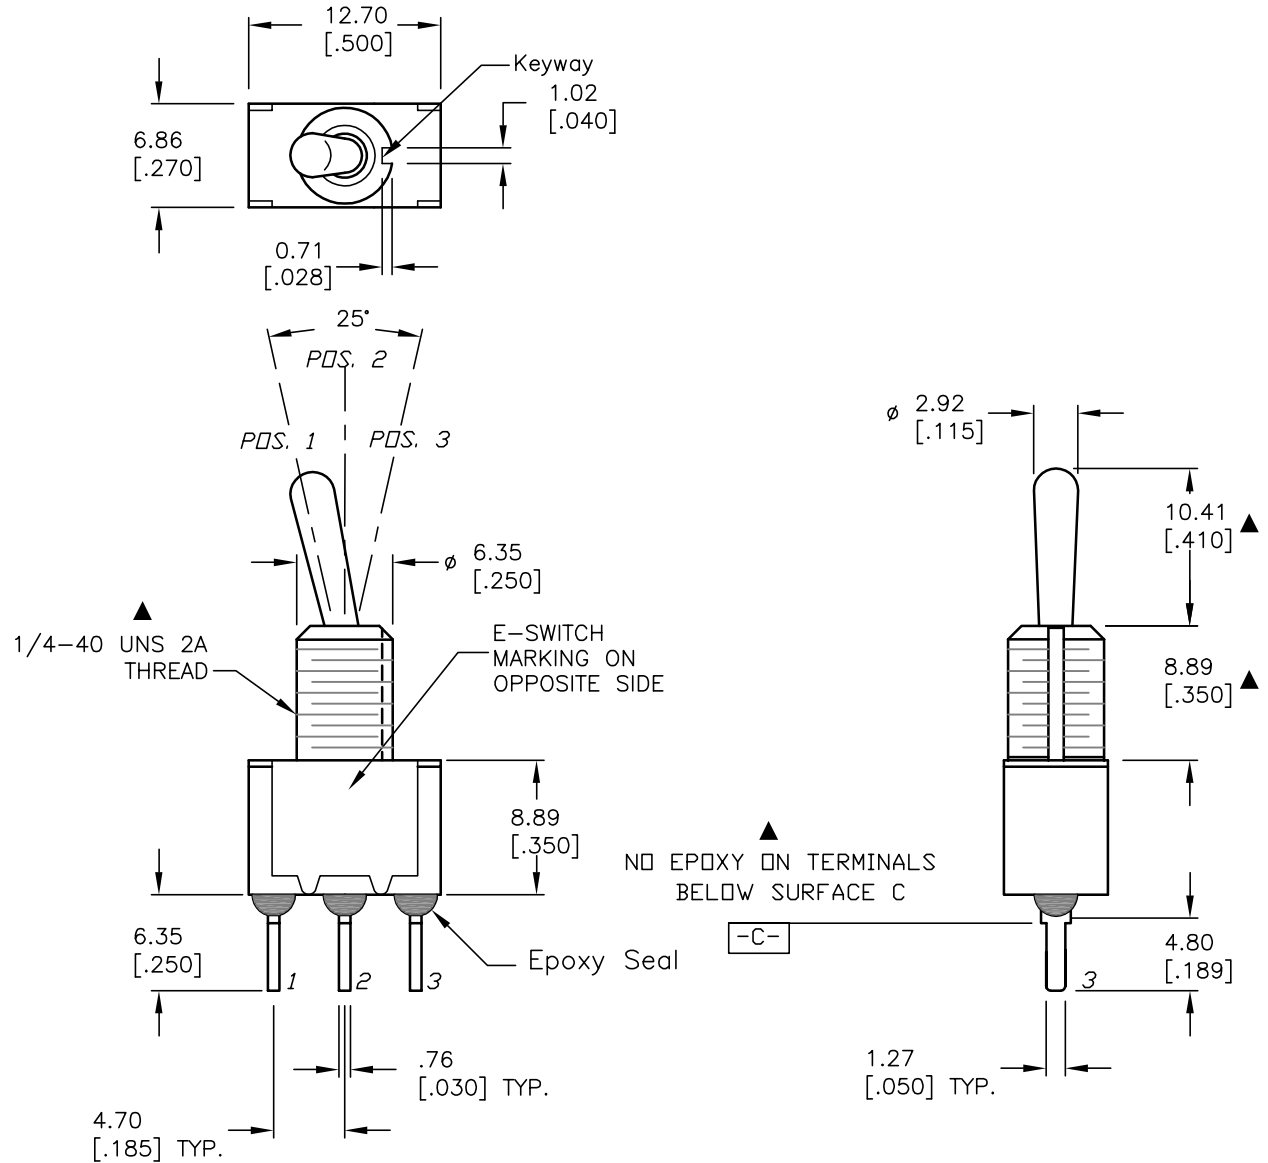

**E-SWITCH®**

TITLE

100SP5T1B1M2RE

A	13477	RELEASED FOR PRODUCTION	9/19/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

SCALE

2:1

DATE

9/19/03

DR

AR

DWG

T115006

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED