
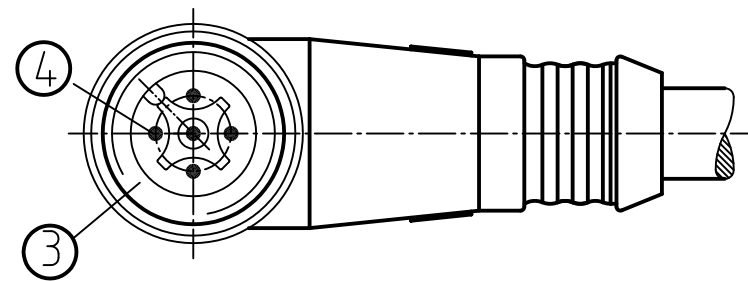



FINISHED LENGTH (SEE TABLE)

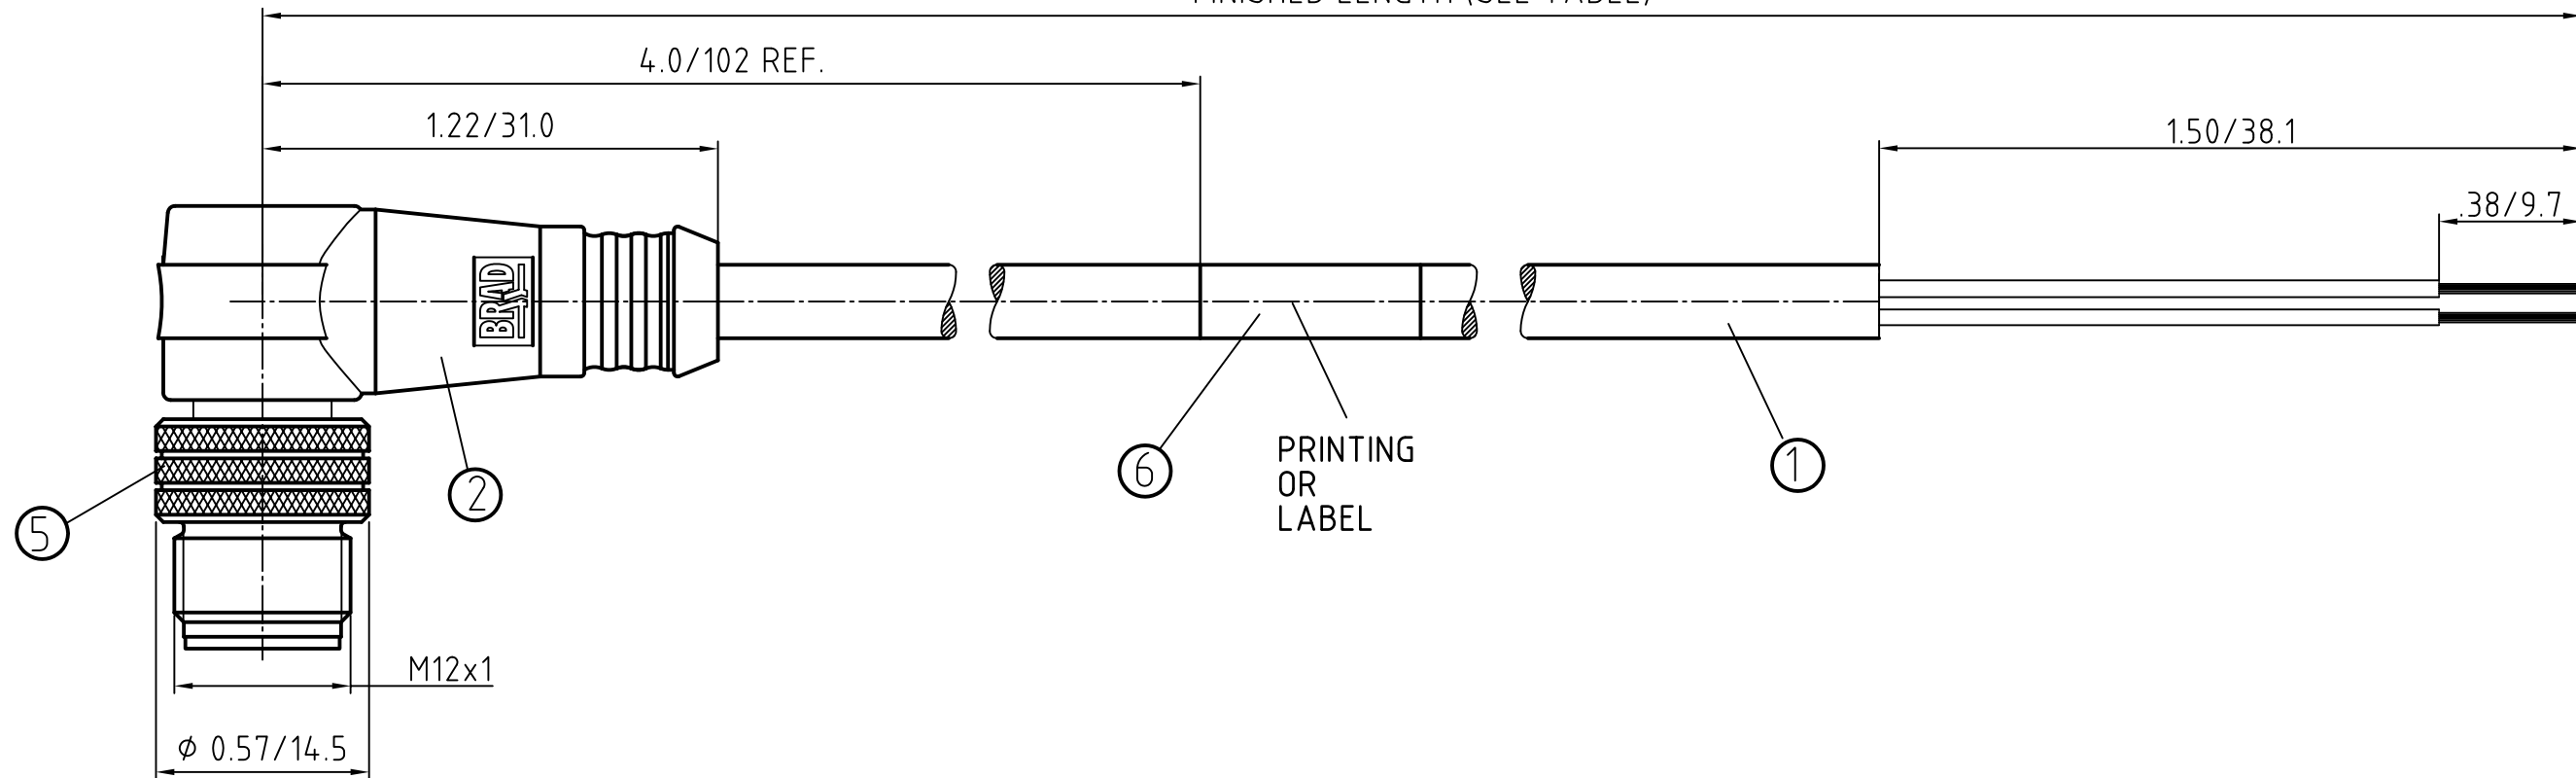

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW

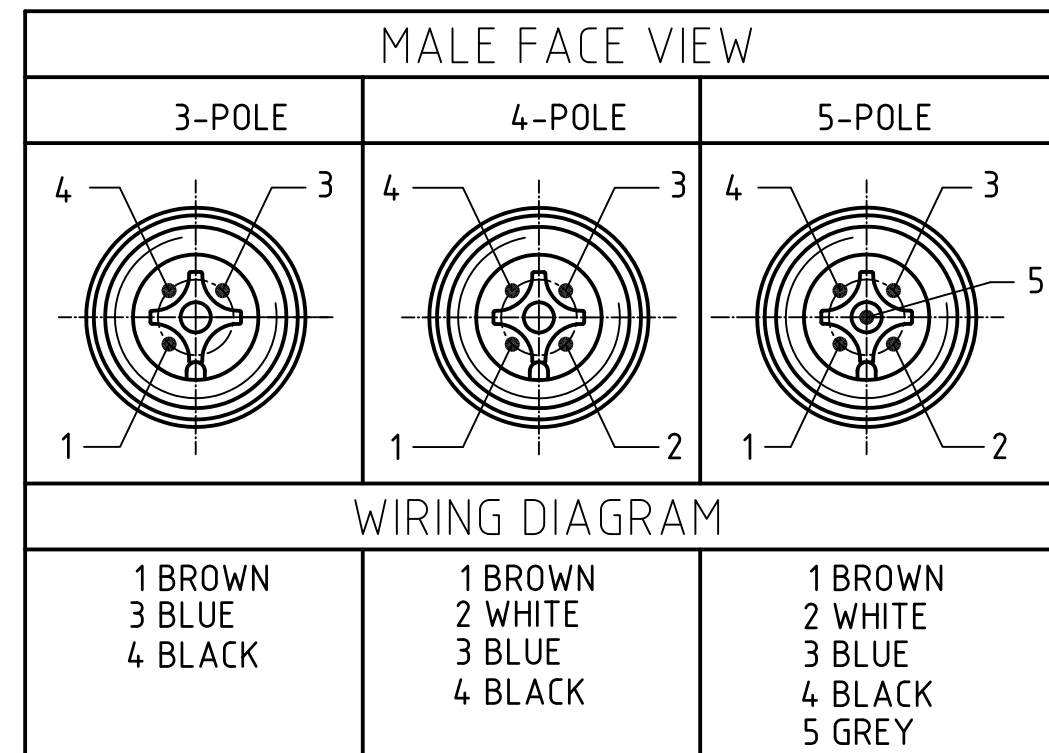

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	$\nabla = 0$ $\nabla \text{C} = 0$	mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	IN/MM	2:1	METRIC	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY DATE CHECKED BY DATE RE 2010/01/21 APPROVED BY DATE NSTAUDIG 2010/01/25	MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE		
	1	SEE TABLE SHEET 2	MATERIAL NO. SIZE A3	DOCUMENT NO. SD-120065-037	MOLEX INCORPORATED THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

10

9

8

7

6

5

4





3

2

1

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CH'KD: NS APPR: NSTAUDIG 2010/01/26	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
		 = 0  = 0	mm	INCH	IN/MM	2:1	METRIC			MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE	
		4 PLACES ±---	±---	IN/MM	2:1						
		3 PLACES ±---	±---	±0.3	±---	DRAWN BY	DATE	MOLEX INCORPORATED 		DOCUMENT NO.	SHEET NO.
2 PLACES ±---	±.01	ANGULAR ± --- °	1 PLACE ±0.3	CHECKED BY	DATE	SD-120065-037		1 OF 1			
1 PLACE ±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
ANGULAR ± --- °				NSTAUDIG	2010/01/25						
				MATERIAL NO.							
				SIZE	A3						

10

9

8

7

6

5

4

3

2

1