
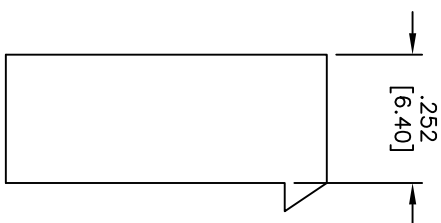
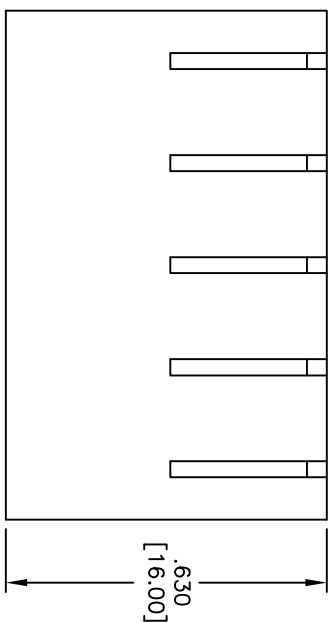


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/3/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

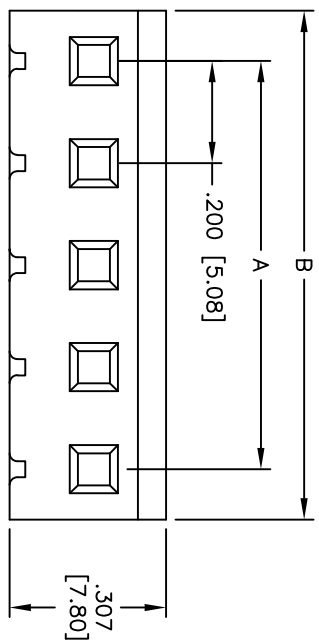

Positions: 2 thru 12  
 A = .200 [5.08] x No. of Positions  
 B = .200 [5.08] x No. of Spaces

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, glass reinforced, UL94V-2  
 Insulator color: Natural  
 Electrical:  
 Voltage rating: 250V AC/DC  
 Current rating: 5A AC/DC  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN AY	11/3/10
CHECKED VW	11/3/10
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] PITCH CRIMP CONTACT HOUSING

SIZE	PART NO.	REV.
X	MTF-B-XX	-
REF: S00015T	SCALE: NTS	SHEET 1 OF 1