
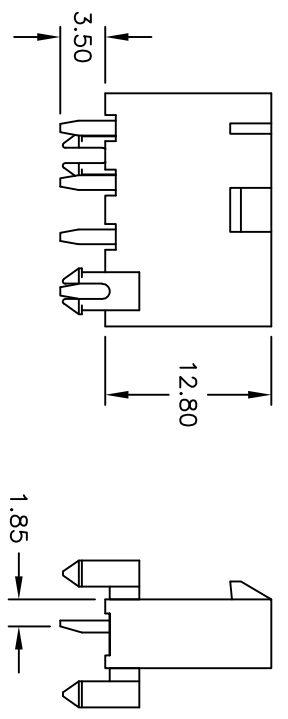


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/04	

APPROVED: _____
 DATE: _____ TITLE: _____

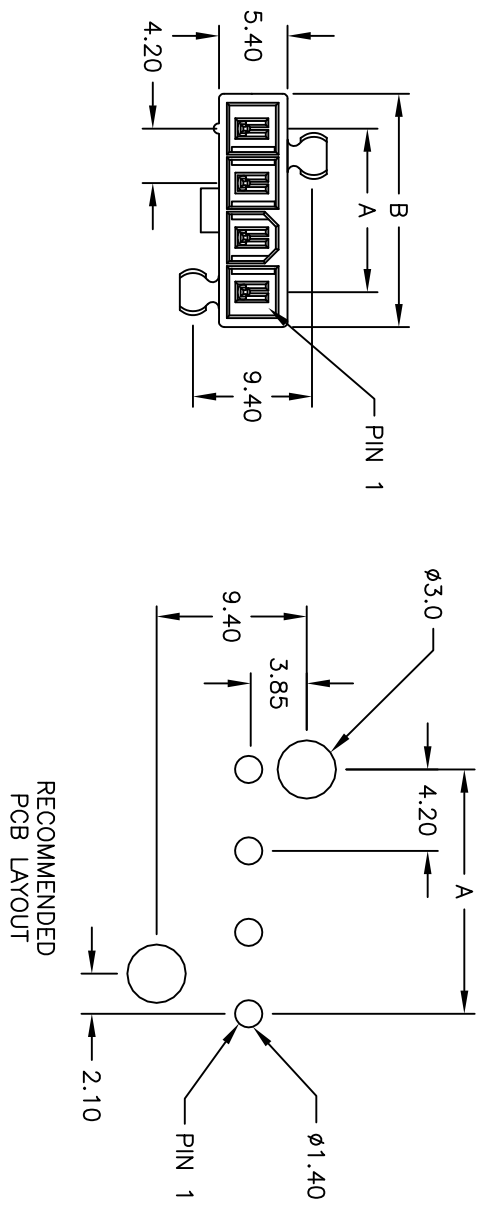

26.40	21.00	DMKA-06-T-3-V0	6
22.20	16.80	DMKA-05-T-3-V0	5
18.00	12.60	DMKA-04-T-3-V0	4
13.80	8.40	DMKA-03-T-3-V0	3
9.60	4.20	DMKA-02-T-3-V0	2
B	A	ADAM TECH P/N:	CKT. SIZE

SPECIFICATIONS:

Material: Nylon, rated UL 94V-0
 Insulator color: Natural
 Pins: Brass, Tin Plated
 Electrical:
 Operation voltage: 600 VAC max
 Current rating: 8 Amps max
 Contact resistance: 10 mohms max
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Environmental:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
APPROVALS	DATE
DRAWN	SLS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: MINI FIT CONNECTOR, DUAL ROW
 4.2MM HEADER

SIZE	PART NO.	REV.
X	DMKA-XX-T-3-V0	
SCALE: NTS	SHEET 1 OF 1	