


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/04	

APPROVED: _____
 DATE: _____ TITLE: _____

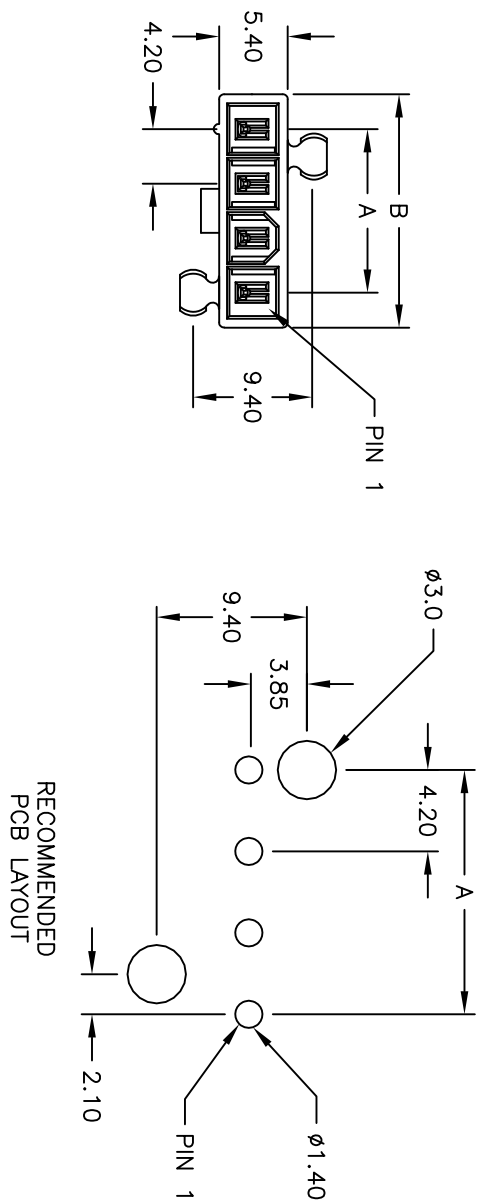

26.40	21.00	DMKA-06-T-3	6
22.20	16.80	DMKA-05-T-3	5
18.00	12.60	DMKA-04-T-3	4
13.80	8.40	DMKA-03-T-3	3
9.60	4.20	DMKA-02-T-3	2
B	A	ADAM TECH P/N:	CKT. SIZE

SPECIFICATIONS:

Material:
 Insulator: Nylon, rated UL 94V-2
 Insulator color: Natural
 Pins: Brass, Tin Plated
Electrical:
 Operation voltage: 600 VAC max
 Current rating: 8 Amps max
 Contact resistance: 10 mohms max
 Dielectric withstanding voltage: 1500 VAC for 1 minute
Environmental:
 Operating temperature: -40°C to +105°C
Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM
 TOLERANCES: EXCEPT AS NOTED
 INCHES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

APPROVALS

DRAWN	SLS	4/1/04
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI FIT CONNECTOR, DUAL ROW
 4.2MM HEADER

SIZE	PART NO.	REV.
X	DMKA-XX-T-3	-

REF: SCALE: NTS SHEET 1 OF 1