

## Schottky Power Diode, 25A

**Features**

- Fast Switching
- Low forward voltage drop
- High surge capability
- High efficiency, low power loss
- Normal and Reverse polarity




DO-203AA (DO-4)

Maximum Ratings ( $T_J = 25^\circ\text{C}$ , unless otherwise noted)						
Parameter	Test Conditions	Symbol	1N5829(R)	1N5830(R)	1N5831(R)	Units
Repetitive peak reverse voltage		$V_{RRM}$	20	25	35	V
RMS reverse voltage		$V_{RMS}$	14	17	25	V
DC blocking voltage		$V_{DC}$	20	25	35	V
Continuous forward current	$T_C \leq 100^\circ\text{C}$	$I_F$	25	25	25	A
Surge non-repetitive forward current, half-sine wave	$T_C = 25^\circ\text{C}$ $t_p = 8.3 \text{ ms}$	$I_{FSM}$	800	800	800	A
Forward voltage	$I_F = 25 \text{ A}$ $T_J = 25^\circ\text{C}$	$V_F$	0.58	0.58	0.58	V
Reverse current	$V_R = 20\text{V}, T_J = 25^\circ\text{C}$	$I_R$	2	2	2	mA
	$V_R = 20\text{V}, T_J = 125^\circ\text{C}$		250	250	250	

Thermal & Mechanical Specifications ( $T_J = 25^\circ\text{C}$ , unless otherwise noted)					
Parameters	Symbol	1N5829(R)	1N5830(R)	1N5831(R)	Units
Maximum thermal resistance, junction to case	$R_{th(jc)}$	1.8			$^\circ\text{C/W}$
Operating junction temperature range	$T_J$	-55 to 150			$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to 175			$^\circ\text{C}$
Mounting torque (non-lubricated threads)	F	2.0			Nm
Approximate allowable weight	W	5.0			g



Package Outline

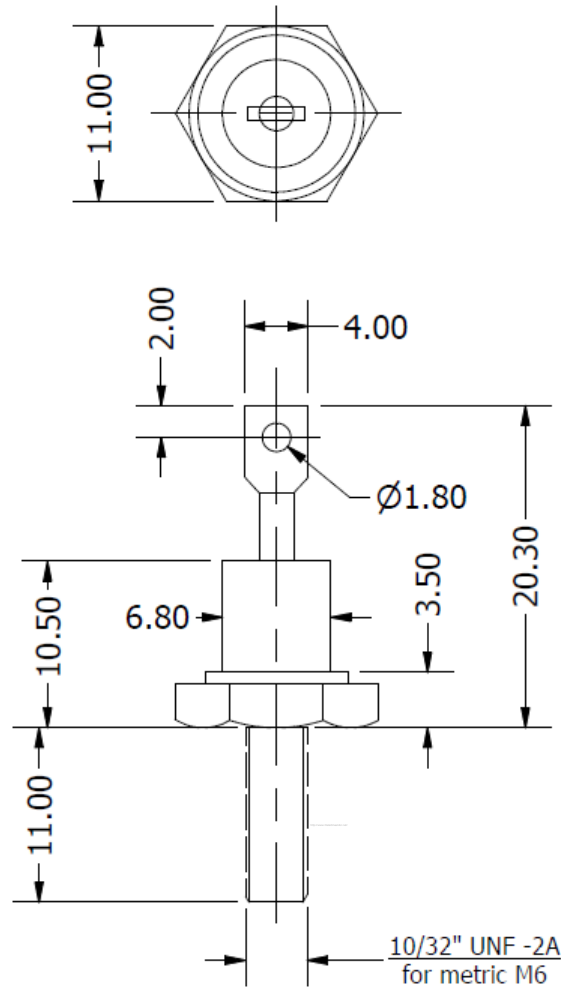

ALL DIMENSIONS IN MM