
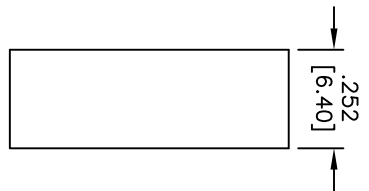
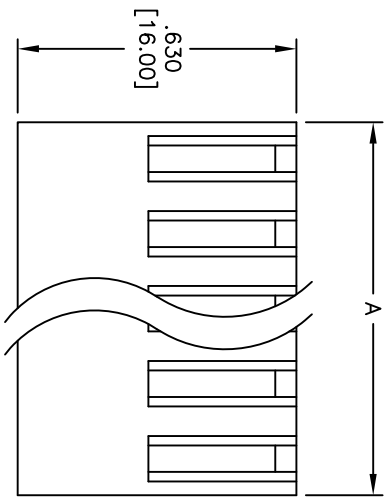


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/27/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

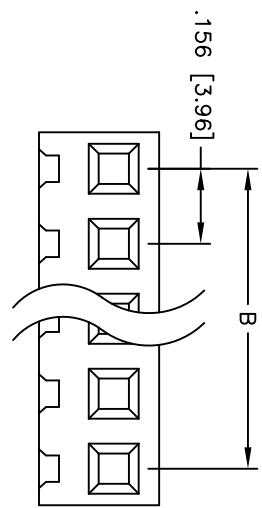

Positions: 2 thru 25  
 A = .156 [3.96] x No. of Positions + .028 [0.70]  
 B = .156 [3.96] x No. of Spaces

SPECIFICATIONS:  
 Material: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Electrical:  
 Operating voltage: 250V AC, DC  
 Current rating: 7A  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant

ROHS COMPLIANT

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES Holes  
 .X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN DY	1/27/11
CHECKED	
APPROVED	

TITLE	SIZE	PART NO.	REV.
.156 [3.96] WIRE HOUSING, NO LOCKING RAMP	X	MTB-XX-NLR	-
REF: S00723T	SCALE: NTS	SHEET 1 OF 1	

6 5 4 3 2 1