


## Features

- 1500W peak pulse power capability with a 10/1000ms waveform, repetition rate (duty cycle): 0.01%
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- For devices with  $V_{(BR)}$  10V  $I_D$  are typically less than 1.0mA at  $T_a = 150^\circ\text{C}$
- **Pb / RoHS Free**

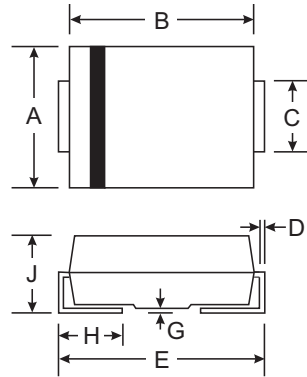

SMC		
Dim	Min	Max
A	5.59	6.22
B	6.60	7.11
C	2.75	3.18
D	0.15	0.31
E	7.75	8.13
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

## Mechanical Data

- Case : SMC Molded plastic
- Epoxy : UL94V-O rate flame retardant
- Lead : Lead Formed for Surface Mount
- Polarity : Color band denotes cathode end except Bipolar.
- Mounting position : Any
- Weight : 0.21 grams

## Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation with a 10/1000 $\mu\text{s}$ waveform (1)(2) Fig.5	$P_{PPM}$	Minimum 1500	W
Peak power pulse current with a 10/1000 $\mu\text{s}$ waveform (1) Fig.2	$I_{PPM}$	See Next Table	A
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave (2)(3)	$I_{FSM}$	200	A
Maximum instantaneous forward voltage at 100A(3)	$V_F$	3.5	V
Operating and Storage Temperature Range	$T_J, T_{STG}$	- 65 to + 185	$^\circ\text{C}$

## Notes :

- (1) Non-repetitive Current pulse, per Fig. 5 and derated above  $T_a = 25^\circ\text{C}$  per Fig. 1
- (2) Mounted on 0.31 x 0.31" (8.0 x 8.0mm) copper pads to each terminal
- (3) Measured on 8.3ms single half sine-wave, or equivalent square wave, duty cycle = 4 pulses per minute maximum



Type	Breakdown Voltage @ $I_t$ (Note 1)		Working Peak Reverse Voltage	Maximum Reverse Leakage @ $V_{RWM}$	Maximum Reverse Leakage @ $V_{RWM}$ , $T_j=150^\circ\text{C}$	Maximum Peak Pulse Surge Current	Maximum Clamping Voltage @ $I_{PPM}$	
	$V_{BR}$ (V)							$I_t$
	Min.	Max.	(mA)	(V)	( $\mu\text{A}$ )	( $\mu\text{A}$ )	(A)	(V)
TPSMC6.8CA	6.12	7.48	10	5.50	1000	10000	139	10.8
TPSMC6.8A	6.45	7.14	10	5.80	1000	10000	143	10.5
TPSMC7.5CA	6.75	8.25	10	6.05	500	5000	128	11.7
TPSMC7.5A	7.13	7.88	10	6.40	500	2000	132	11.3
TPSMC8.2CA	7.38	9.02	10	6.63	200	2000	120	12.5
TPSMC8.2A	7.79	8.61	10	7.02	200	500	124	12.1
TPSMC9.1CA	8.19	10.0	1.0	7.37	50	500	109	13.8
TPSMC9.1A	8.65	9.55	1.0	7.78	50	200	112	13.4
TPSMC10CA	9.00	11.0	1.0	8.10	20	200	100	15.0
TPSMC10A	9.50	10.5	1.0	8.55	20	50	103	14.5
TPSMC11CA	9.90	12.1	1.0	8.92	5.0	50	92.6	16.2
TPSMC11A	10.5	11.6	1.0	9.40	5.0	10	96.2	15.6
TPSMC12CA	10.8	13.2	1.0	9.72	2.0	10	86.7	17.3
TPSMC12A	11.4	12.6	1.0	10.2	2.0	10	89.8	16.7
TPSMC13CA	11.7	14.3	1.0	10.5	2.0	10	78.9	19.0
TPSMC13A	12.4	13.7	1.0	11.1	2.0	10	82.4	18.2
TPSMC15CA	13.5	16.5	1.0	12.1	1.0	10	68.2	22.0
TPSMC15A	14.3	15.8	1.0	12.8	1.0	10	70.8	21.2
TPSMC16CA	14.4	17.6	1.0	12.9	1.0	10	63.8	23.5
TPSMC16A	15.2	16.8	1.0	13.6	1.0	10	66.7	22.5
TPSMC18CA	16.2	19.8	1.0	14.5	1.0	10	56.6	26.5
TPSMC18A	17.1	18.9	1.0	15.3	1.0	10	59.5	25.2
TPSMC20CA	18.0	22.0	1.0	16.2	1.0	10	51.5	29.1
TPSMC20A	19.0	21.0	1.0	17.1	1.0	10	54.2	27.7
TPSMC22CA	19.8	24.2	1.0	17.8	1.0	10	47.0	31.9
TPSMC22A	20.9	23.1	1.0	18.8	1.0	10	49.0	30.6
TPSMC24CA	21.6	26.4	1.0	19.4	1.0	10	43.2	34.7
TPSMC24A	22.8	25.2	1.0	20.5	1.0	10	45.2	33.2
TPSMC27CA	24.3	29.7	1.0	21.8	1.0	10	38.4	39.1
TPSMC27A	25.7	28.4	1.0	23.1	1.0	10	40.0	37.5
TPSMC30CA	27.0	33.0	1.0	24.3	1.0	10	34.5	43.5
TPSMC30A	28.5	31.5	1.0	25.6	1.0	10	36.2	41.4
TPSMC33CA	29.7	36.3	1.0	26.8	1.0	10	31.4	47.7
TPSMC33A	31.4	34.7	1.0	28.2	1.0	10	32.8	45.7
TPSMC36CA	32.4	39.6	1.0	29.1	1.0	10	28.8	52.0
TPSMC36A	34.2	37.8	1.0	30.8	1.0	10	30.1	49.9
TPSMC39CA	35.1	42.9	1.0	31.6	1.0	10	26.6	56.4
TPSMC39A	37.1	41.0	1.0	33.3	1.0	10	27.8	53.9
TPSMC43CA	38.7	47.3	1.0	34.8	1.0	10	24.2	61.9
TPSMC43A	40.9	45.2	1.0	36.8	1.0	10	25.3	59.3

**Notes :**

- (1)  $V_{BR}$  measured after  $I_t$  applied for 300  $\mu\text{s}$ .,  $I_t$  = square wave pulse or equivalent.
- (2) Surge current waveform per Fig. 5 and derate per Fig. 1
- (3) "PSMC" will be omitted in marking on the diode.

