



Stecklänge / mating length




E = early mate, late break / voreilend
 S = standard
 L = late mate, early break / nacheilend

Bestückungsplan / contact layout

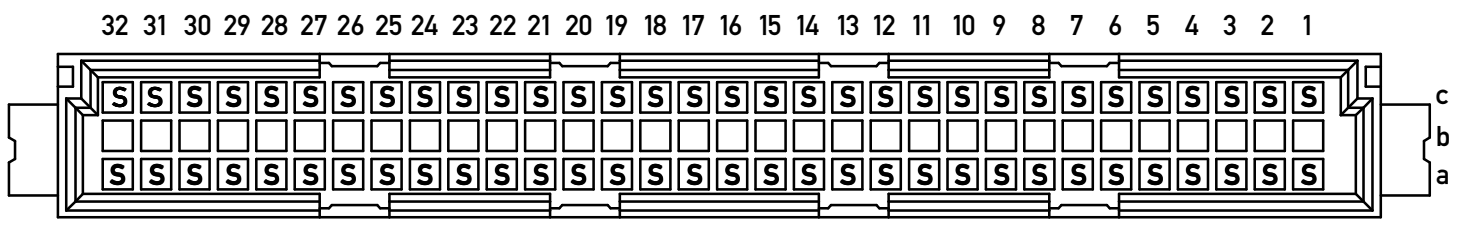

Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material : PBT GF 30
 Bauart 4 / type 4
 Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
 diameter of drilled hole see drawing 114124
 1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
 $\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished platet-through hole

Leiterplatten-Lochbild / PCB drillhole pattern

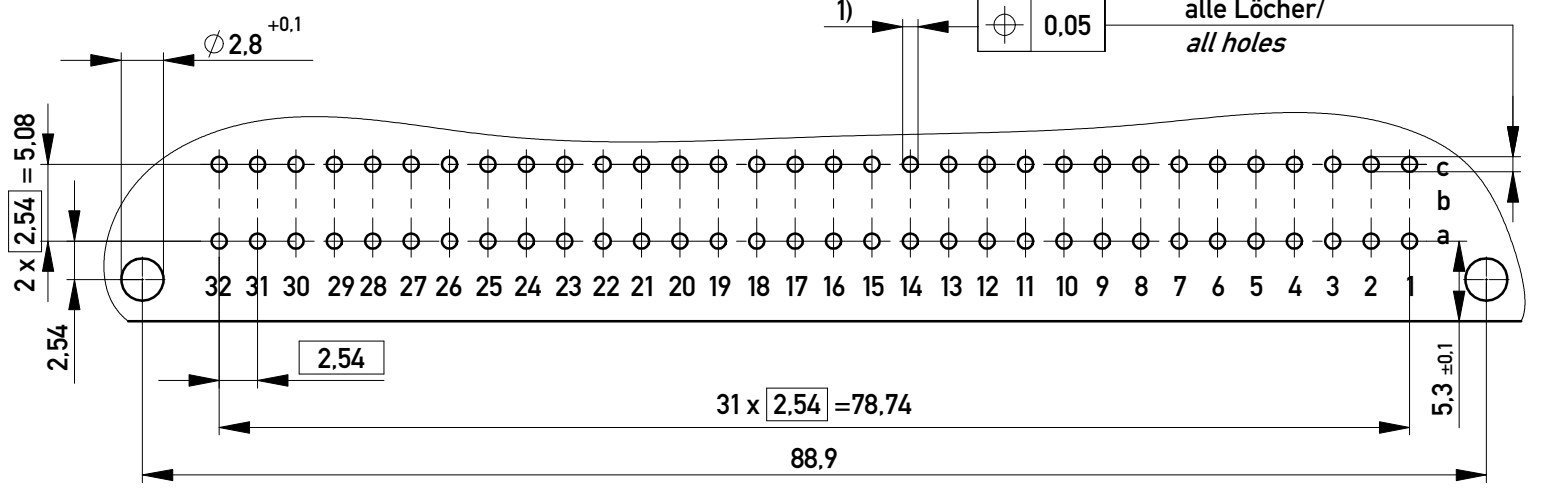

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.

Information:		Tolerances	Scale 2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm	Designation Messerleiste C 64 EE Male Con. C 64 EE
Subject to modification without prior notice. Drawing will not be updated.			
a	24.08.2011	Class STVC	
Index	Date	I A3	