



PARA LIGHT ELECTRONICS CO., LTD.

4F, No.1, Lane 93, Chien Yi Road, Chung Ho City, Taipei, Taiwan

Tel: 886-2-2225-3733

Fax: 886-2-2225-4800

E-mail: para@para.com.tw

<http://www.para.com.tw>

DATA SHEET

PART NO.:L-T3014XWDT

REV: A / 0

CUSTOMER'S APPROVAL : _____

DCC : _____

DRAWING NO. : DS-31P-12-0005

DATE : 2012-3-2

PAGE

1 of 19


I Features

- Ū Top view, Wide view angle, White color PLCC 2 package SMD LED .
- Ū EIA STD package, packing in 8mm tape on 7" diameter reels (ANSI/EIA-481-B-2001).
- Ū Compatible with automatic Pick & Place equipment.
- Ū Compatible with IR Reflow soldering and TTW soldering.
- Ū Pb free product and acceptable lead-free process.
- Ū Meet RoHS Green Product

I Application

- Ū Backlighting (LCD, Switches, keys, displays, illuminated advertising)
- Ū lighting / Signal and symbol luminaries.

I Package Outline Dimensions

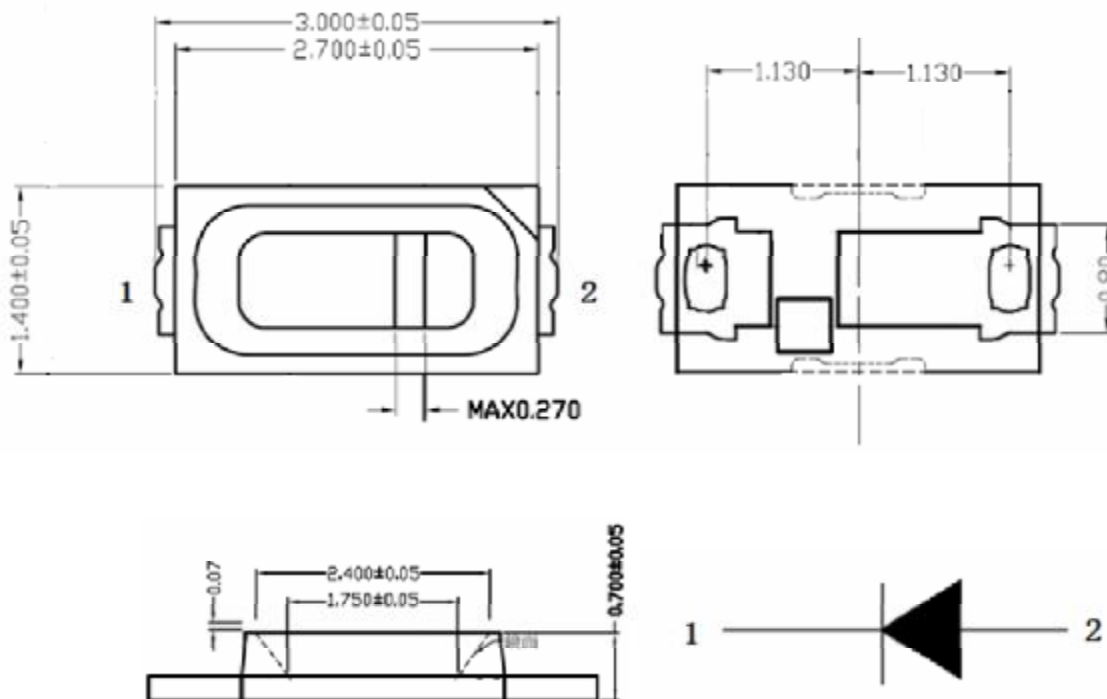

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.10 mm (.004") unless otherwise noted.



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

Chip Materials

- Ū Dice Material : InGaN
- Ū Light Color : White
- Ū Lens Color : Light Yellow Diffused

Absolute Maximum Ratings(Ta=25°C)

| Symbol | Parameter | Rating | Unit |
|--------|--|-------------|------|
| PD | Power Dissipation | 120 | mW |
| IPF | Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width) | 100 | mA |
| IF | Continuous Forward Current | 35 | mA |
| VR | Reverse Voltage | 5 | V |
| ESD | Electrostatic Discharge Threshold (HBM) ^{Note A} | 1000 | V |
| Topr | Operating Temperature Range | -30 ~ + 85 | °C |
| Tstg | Storage Temperature Range | -40 ~ + 100 | °C |
| Tj | LED Junction Temperature | 125 | °C |

*Duty1/10 @1KHZ

Electro-Optical Characteristics (Ta=25°C)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|-----------------------|--------|------|------|------|------|----------------|
| Luminous flux | φv | 8 | | 12 | lm | IF=30mA |
| Luminous Intensity | Iv | 2500 | | 3800 | mcd | IF=30mA |
| Color temperature | CCT | 2550 | | 7000 | K | IF=30mA |
| Viewing Angle | 2θ1/2 | / | 120 | / | Deg | / |
| Forward Voltage | VF | 3.1 | | 3.6 | V | IF = 30mA |
| Reverse Current | IR | / | / | 10 | μA | VR = 5V |
| Color Rendering Index | CRI | 65 | | 80 | Ra | IF=30mA |

*Forward voltage measurement allowance is±0.1V.

* Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.

*Luminous Intensity Measurement Allowance is±10%.

*Dominant Wavelength measurement allowance is±1nm.

*2θ1/2 is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

*Please see attachments for BIN classifications..

DRAWING NO. : DS-31P-12-0005

DATE : 2012-3-2 PAGE

3 of 19

● Typical Electro-Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

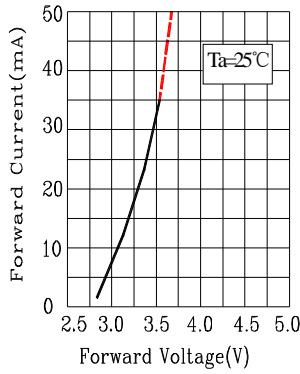


Fig.1 Forward Current vs. Forward Voltage

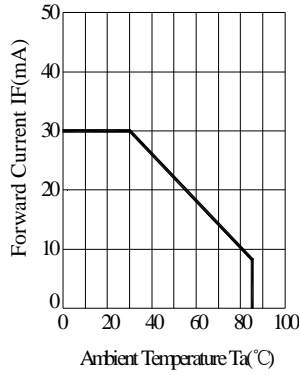


Fig.2 Forward Current Derating Curve

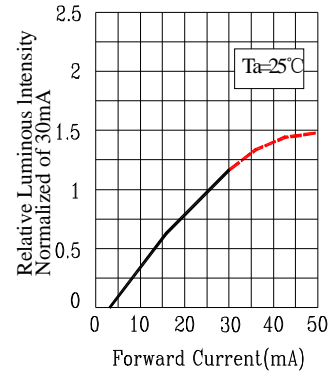


Fig.3 Relative Luminous Intensity vs. Forward Current

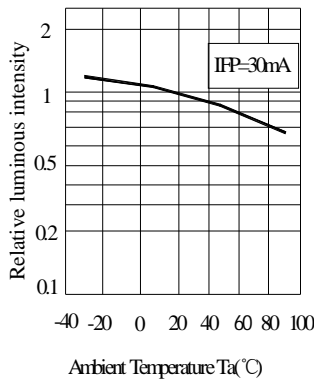


Fig.4 Luminous Intensity vs. Ambient Temperature

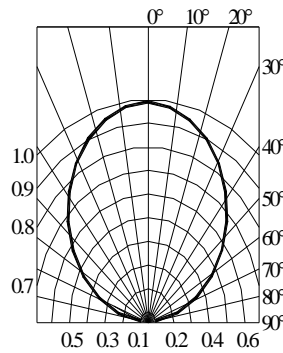


Fig.5 Spatial Distribution

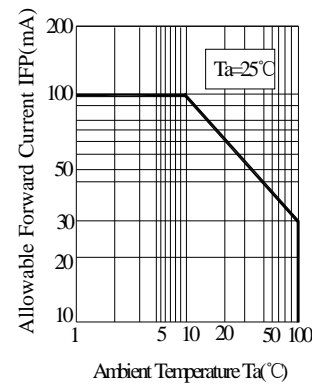


Fig.6 Forward Current Derating Curve

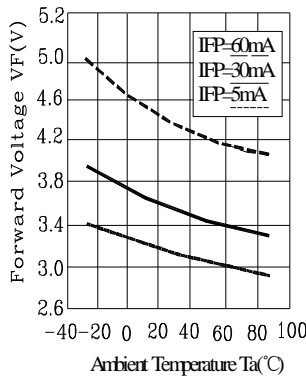


Fig.7 Ambient Temperature vs. Forward Voltage

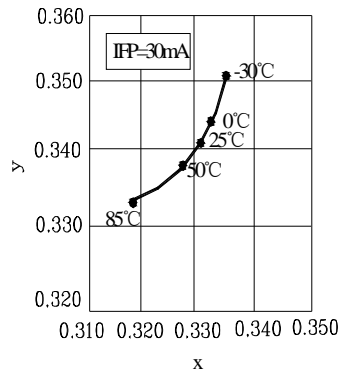


Fig.8 Ambient Temperature vs. Chromaticity Coordinate

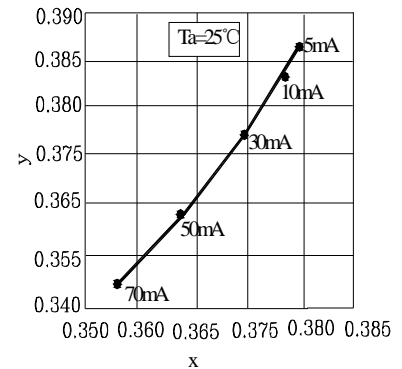


Fig.9 Forward Current vs. Chromaticity Coordinate

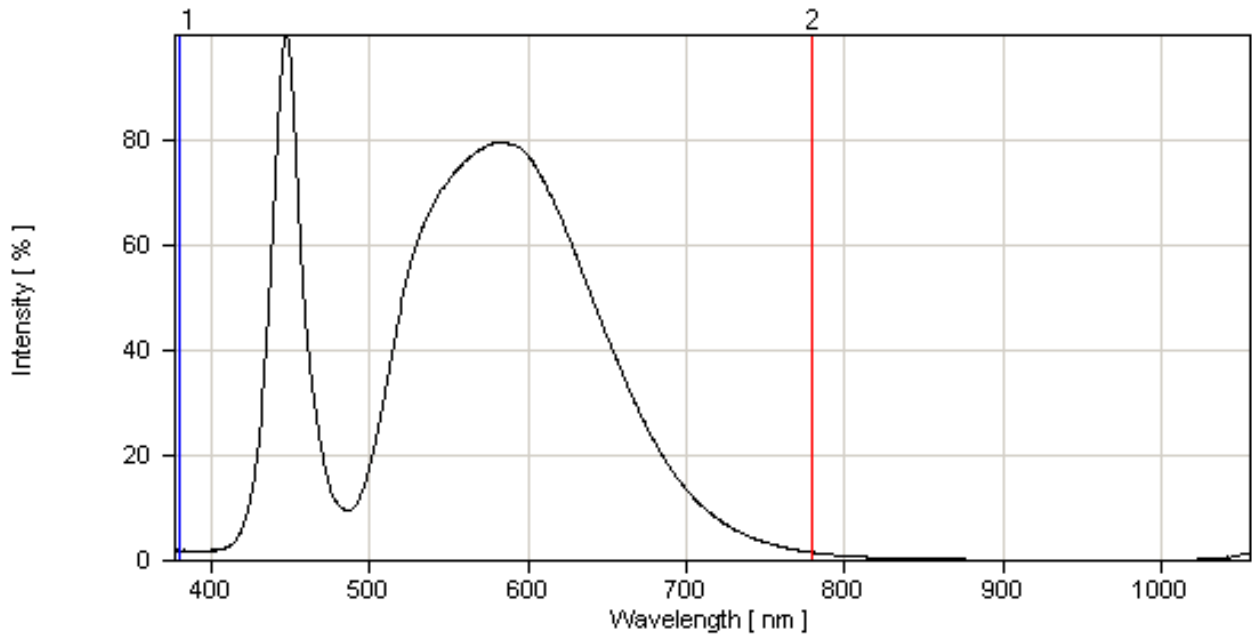


Fig.1 Relative Intensity vs. Wavelength


I IV Bin Code List

| Luminous Flux(IV), Unit:lm@30mA | | |
|---------------------------------|----|----|
| L7 | 8 | 9 |
| L8 | 9 | 10 |
| L9 | 10 | 11 |
| La | 11 | 12 |

I VF Bin Code List

| Forward Voltage(VF),, Unit:V@30mA | | |
|-----------------------------------|------|------|
| BINCODE | MIN | MAX |
| V3 | 3.10 | 3.20 |
| V4 | 3.20 | 3.30 |
| V5 | 3.30 | 3.40 |
| V6 | 3.40 | 3.50 |
| V7 | 3.50 | 3.60 |

• Bin Range of Chromaticity Coordinates @ 30Ma

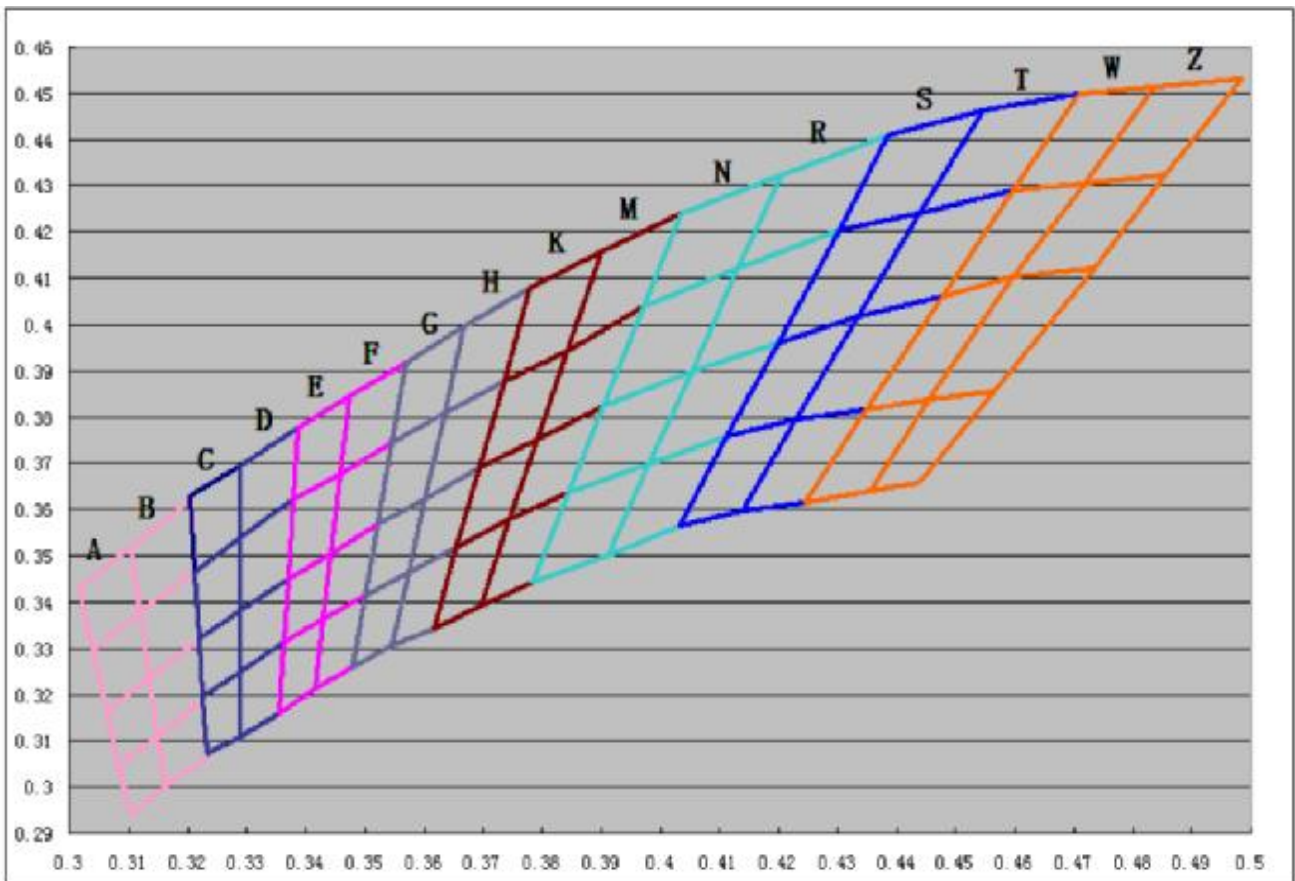



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

● Bin Range of Chromaticity Coordinates @ 30Ma

| 色温范围 | BIN | 色坐标 | | | | | | |
|-----------|-----------|-----|--------|--------|--------|--------|--------|--------|
| | | | 左下 | 左上 | 右上 | 右下 | 左下 | |
| 6500-7000 | A1 | X | 0.3039 | 0.3016 | 0.3102 | 0.3118 | 0.3039 | |
| | | Y | 0.3297 | 0.3428 | 0.3519 | 0.3379 | 0.3297 | |
| | A2 | X | 0.3063 | 0.3039 | 0.3118 | 0.3134 | 0.3063 | |
| | | Y | 0.3161 | 0.3297 | 0.3379 | 0.3239 | 0.3161 | |
| | A3 | X | 0.3083 | 0.3063 | 0.3134 | 0.3149 | 0.3083 | |
| | | Y | 0.3047 | 0.3161 | 0.3239 | 0.3107 | 0.3047 | |
| | A4 | X | 0.3102 | 0.3083 | 0.3149 | 0.3161 | 0.3102 | |
| | | Y | 0.2939 | 0.3047 | 0.3107 | 0.3002 | 0.2939 | |
| | 6000-6500 | B1 | X | 0.3118 | 0.3102 | 0.3206 | 0.3213 | 0.3118 |
| | | | Y | 0.3379 | 0.3519 | 0.3621 | 0.3468 | 0.3379 |
| B2 | | X | 0.3134 | 0.3118 | 0.3213 | 0.322 | 0.3134 | |
| | | Y | 0.3239 | 0.3379 | 0.3468 | 0.332 | 0.3239 | |
| B3 | | X | 0.3149 | 0.3134 | 0.322 | 0.3226 | 0.3149 | |
| | | Y | 0.3107 | 0.3239 | 0.332 | 0.3189 | 0.3107 | |
| B4 | | X | 0.3161 | 0.3149 | 0.3226 | 0.3232 | 0.3161 | |
| | | Y | 0.3002 | 0.3107 | 0.3189 | 0.3065 | 0.3 | |
| 6000-5650 | C1 | X | 0.3213 | 0.3205 | 0.329 | 0.329 | 0.3213 | |
| | | Y | 0.3465 | 0.363 | 0.3696 | 0.354 | 0.3465 | |
| | C2 | X | 0.322 | 0.3213 | 0.329 | 0.329 | 0.322 | |
| | | Y | 0.3322 | 0.3465 | 0.354 | 0.338 | 0.3322 | |
| | C3 | X | 0.3226 | 0.322 | 0.329 | 0.329 | 0.3226 | |
| | | Y | 0.3195 | 0.3322 | 0.338 | 0.3248 | 0.3195 | |
| | C4 | X | 0.3232 | 0.3226 | 0.329 | 0.329 | 0.3232 | |
| | | Y | 0.3072 | 0.3195 | 0.3248 | 0.311 | 0.3072 | |



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

| 色温范围 | BIN | 色坐标 | | | | | | |
|-----------|-----------|-----|--------|--------|--------|--------|--------|--------|
| | | | 左下 | 左上 | 右上 | 右下 | 左下 | |
| 5650-5300 | D1 | X | 0.329 | 0.329 | 0.3388 | 0.338 | 0.329 | |
| | | Y | 0.354 | 0.3696 | 0.3778 | 0.3623 | 0.354 | |
| | D2 | X | 0.329 | 0.329 | 0.338 | 0.3371 | 0.329 | |
| | | Y | 0.338 | 0.354 | 0.3623 | 0.345 | 0.3382 | |
| | D3 | X | 0.329 | 0.329 | 0.3371 | 0.3364 | 0.329 | |
| | | Y | 0.3248 | 0.338 | 0.345 | 0.3315 | 0.3248 | |
| | D4 | X | 0.329 | 0.329 | 0.3364 | 0.3356 | 0.329 | |
| | | Y | 0.311 | 0.3248 | 0.3315 | 0.316 | 0.311 | |
| | 5300-5025 | E1 | X | 0.338 | 0.3388 | 0.3474 | 0.3458 | 0.338 |
| | | | Y | 0.3621 | 0.3778 | 0.3847 | 0.3675 | 0.3621 |
| | | E2 | X | 0.3371 | 0.338 | 0.3458 | 0.3442 | 0.3371 |
| | | | Y | 0.345 | 0.3621 | 0.3675 | 0.3505 | 0.345 |
| E3 | | X | 0.3364 | 0.3371 | 0.3442 | 0.3429 | 0.3364 | |
| | | Y | 0.3315 | 0.345 | 0.3505 | 0.3364 | 0.3315 | |
| E4 | | X | 0.3356 | 0.3364 | 0.3429 | 0.3415 | 0.3356 | |
| | | Y | 0.316 | 0.3315 | 0.3364 | 0.3214 | 0.316 | |
| 5025-4750 | | F1 | X | 0.3458 | 0.3474 | 0.357 | 0.3546 | 0.3458 |
| | | | Y | 0.3675 | 0.3847 | 0.3918 | 0.3743 | 0.3675 |
| | | F2 | X | 0.3442 | 0.3458 | 0.3546 | 0.3522 | 0.3442 |
| | | | Y | 0.3505 | 0.3675 | 0.3743 | 0.3568 | 0.3505 |
| | F3 | X | 0.3429 | 0.3442 | 0.3522 | 0.3501 | 0.3429 | |
| | | Y | 0.3364 | 0.3505 | 0.3568 | 0.3414 | 0.3364 | |
| | F4 | X | 0.3415 | 0.3429 | 0.3501 | 0.348 | 0.3415 | |
| | | Y | 0.3214 | 0.3364 | 0.3414 | 0.3261 | 0.3214 | |



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

| 色温范围 | BIN | 色坐标 | | | | | | |
|-----------|-----------|-----|--------|--------|--------|--------|--------|--------|
| | | | 左下 | 左上 | 右上 | 右下 | 左下 | |
| 4750-4500 | G1 | X | 0.3546 | 0.357 | 0.3668 | 0.3635 | 0.3546 | |
| | | Y | 0.3743 | 0.3918 | 0.3997 | 0.3808 | 0.3743 | |
| | G2 | X | 0.3522 | 0.3546 | 0.3635 | 0.3602 | 0.3522 | |
| | | Y | 0.3568 | 0.3743 | 0.3808 | 0.3621 | 0.3568 | |
| | G3 | X | 0.3501 | 0.3522 | 0.3602 | 0.3574 | 0.3501 | |
| | | Y | 0.3414 | 0.3568 | 0.3621 | 0.3463 | 0.3414 | |
| | G4 | X | 0.348 | 0.3501 | 0.3574 | 0.3546 | 0.348 | |
| | | Y | 0.3261 | 0.3414 | 0.3463 | 0.3305 | 0.3261 | |
| | 4500-4250 | H1 | X | 0.3635 | 0.3668 | 0.3779 | 0.3736 | 0.3635 |
| | | | Y | 0.3808 | 0.3997 | 0.4079 | 0.3879 | 0.3808 |
| | | H2 | X | 0.3602 | 0.3635 | 0.3736 | 0.3693 | 0.3602 |
| | | | Y | 0.3621 | 0.3808 | 0.3879 | 0.3691 | 0.3621 |
| H3 | | X | 0.3574 | 0.3602 | 0.3693 | 0.3655 | 0.3574 | |
| | | Y | 0.3463 | 0.3621 | 0.3691 | 0.3519 | 0.3463 | |
| H4 | | X | 0.3546 | 0.3574 | 0.3655 | 0.3616 | 0.3546 | |
| | | Y | 0.3305 | 0.3463 | 0.3519 | 0.3343 | 0.3305 | |
| 4250-4000 | | K1 | X | 0.3736 | 0.3779 | 0.39 | 0.3843 | 0.3736 |
| | | | Y | 0.3879 | 0.4079 | 0.4157 | 0.3943 | 0.3879 |
| | K2 | X | 0.3693 | 0.3736 | 0.3843 | 0.3792 | 0.3693 | |
| | | Y | 0.3691 | 0.3879 | 0.3943 | 0.3752 | 0.3691 | |
| | K3 | X | 0.3655 | 0.3693 | 0.3792 | 0.3744 | 0.3655 | |
| | | Y | 0.3519 | 0.3691 | 0.3752 | 0.3579 | 0.3519 | |
| | K4 | X | 0.3616 | 0.3655 | 0.3744 | 0.3696 | 0.3616 | |
| | | Y | 0.3343 | 0.3519 | 0.3579 | 0.3392 | 0.3343 | |



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

| 色温范围 | BIN | 色坐标 | | | | | | |
|-----------|-----------|-----|--------|--------|--------|--------|--------|--------|
| | | | 左下 | 左上 | 右上 | 右下 | 左下 | |
| 4000-3750 | M1 | X | 0.3843 | 0.39 | 0.4035 | 0.3972 | 0.3843 | |
| | | Y | 0.3943 | 0.4157 | 0.4239 | 0.4038 | 0.3943 | |
| | M2 | X | 0.3792 | 0.3843 | 0.3972 | 0.3904 | 0.3792 | |
| | | Y | 0.3752 | 0.3943 | 0.4038 | 0.3822 | 0.3752 | |
| | M3 | X | 0.3744 | 0.3792 | 0.3904 | 0.3846 | 0.3744 | |
| | | Y | 0.3579 | 0.3752 | 0.3822 | 0.3638 | 0.3579 | |
| | M4 | X | 0.3696 | 0.3744 | 0.3846 | 0.3785 | 0.3696 | |
| | | Y | 0.3392 | 0.3579 | 0.3638 | 0.3444 | 0.3392 | |
| | 3750-3500 | N1 | X | 0.3972 | 0.4035 | 0.4205 | 0.4131 | 0.3972 |
| | | | Y | 0.4038 | 0.4239 | 0.4325 | 0.4121 | 0.4038 |
| | | N2 | X | 0.3904 | 0.3972 | 0.4131 | 0.4053 | 0.3904 |
| | | | Y | 0.3822 | 0.4038 | 0.4121 | 0.39 | 0.3822 |
| N3 | | X | 0.3846 | 0.3904 | 0.4053 | 0.398 | 0.3846 | |
| | | Y | 0.3638 | 0.3822 | 0.39 | 0.3697 | 0.3638 | |
| N4 | | X | 0.3785 | 0.3846 | 0.398 | 0.391 | 0.3785 | |
| | | Y | 0.3444 | 0.3638 | 0.3697 | 0.3502 | 0.3444 | |
| 3500-3250 | | R1 | X | 0.4131 | 0.4205 | 0.4386 | 0.4302 | 0.4131 |
| | | | Y | 0.4121 | 0.4325 | 0.4409 | 0.4206 | 0.4121 |
| | | R2 | X | 0.4053 | 0.4131 | 0.4302 | 0.4199 | 0.4053 |
| | | | Y | 0.39 | 0.4121 | 0.4206 | 0.3962 | 0.39 |
| | R3 | X | 0.398 | 0.4053 | 0.4199 | 0.4113 | 0.398 | |
| | | Y | 0.3697 | 0.39 | 0.3962 | 0.3758 | 0.3697 | |
| | R4 | X | 0.391 | 0.398 | 0.4113 | 0.4033 | 0.391 | |
| | | Y | 0.3502 | 0.3697 | 0.3758 | 0.3564 | 0.3502 | |



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

| 色温范围 | BIN | 色坐标 | | | | | | |
|-----------|-----------|-----|--------|--------|--------|--------|--------|--------|
| | | | 左下 | 左上 | 右上 | 右下 | 左下 | |
| 3250-3050 | S1 | X | 0.4302 | 0.4386 | 0.4546 | 0.4438 | 0.4302 | |
| | | Y | 0.4206 | 0.4409 | 0.4464 | 0.4241 | 0.4206 | |
| | S2 | X | 0.4199 | 0.4302 | 0.4438 | 0.4336 | 0.4199 | |
| | | Y | 0.3962 | 0.4206 | 0.4241 | 0.4019 | 0.3962 | |
| | S3 | X | 0.4113 | 0.4199 | 0.4336 | 0.4229 | 0.4113 | |
| | | Y | 0.3758 | 0.3962 | 0.4019 | 0.3794 | 0.3758 | |
| | S4 | X | 0.4033 | 0.4113 | 0.4229 | 0.414 | 0.4033 | |
| | | Y | 0.3564 | 0.3758 | 0.3794 | 0.3597 | 0.3564 | |
| | 3050-2850 | T1 | X | 0.4438 | 0.4546 | 0.4709 | 0.4598 | 0.4438 |
| | | | Y | 0.4241 | 0.4464 | 0.45 | 0.4292 | 0.4241 |
| | | T2 | X | 0.4336 | 0.4438 | 0.4598 | 0.4479 | 0.4336 |
| | | | Y | 0.4019 | 0.4241 | 0.4292 | 0.4061 | 0.4019 |
| T3 | | X | 0.4229 | 0.4336 | 0.4479 | 0.4348 | 0.4229 | |
| | | Y | 0.3794 | 0.4019 | 0.4061 | 0.3815 | 0.3794 | |
| T4 | | X | 0.414 | 0.4229 | 0.4348 | 0.4244 | 0.414 | |
| | | Y | 0.3597 | 0.3794 | 0.3815 | 0.3617 | 0.3597 | |
| 2850-2700 | | W1 | X | 0.4598 | 0.4709 | 0.4835 | 0.472 | 0.4598 |
| | | | Y | 0.4292 | 0.45 | 0.4513 | 0.4304 | 0.4292 |
| | W2 | X | 0.4479 | 0.4598 | 0.472 | 0.4598 | 0.4479 | |
| | | Y | 0.4061 | 0.4292 | 0.4304 | 0.4103 | 0.4061 | |
| | W3 | X | 0.4348 | 0.4479 | 0.4598 | 0.4455 | 0.4348 | |
| | | Y | 0.3815 | 0.4061 | 0.4103 | 0.3837 | 0.3815 | |
| | W4 | X | 0.4244 | 0.4348 | 0.4455 | 0.4355 | 0.4244 | |
| | | Y | 0.3617 | 0.3815 | 0.3837 | 0.364 | 0.3617 | |
| 2700-2550 | Z1 | X | 0.472 | 0.4835 | 0.4985 | 0.4855 | 0.472 | |
| | | Y | 0.4304 | 0.4513 | 0.4533 | 0.4324 | 0.4304 | |
| | Z2 | X | 0.4598 | 0.472 | 0.4855 | 0.4735 | 0.4598 | |
| | | Y | 0.4103 | 0.4304 | 0.4324 | 0.4123 | 0.4103 | |
| | Z3 | X | 0.4455 | 0.4598 | 0.4735 | 0.4565 | 0.4455 | |
| | | Y | 0.3837 | 0.4103 | 0.4123 | 0.3857 | 0.3837 | |
| | Z4 | X | 0.4355 | 0.4455 | 0.4565 | 0.4439 | 0.4355 | |
| | | Y | 0.364 | 0.3837 | 0.3857 | 0.366 | 0.364 | |



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

Label Explanation



CUS. PART NO: To be denominated.

CUSTOMER: To be denominated.

PART NO: Refer to P15

IV--- Luminous Intensity Code

VF--- Forward Voltage Code

CIE--- Color Rank Code

LOT NO: E L P 7 8 0001
 A B C D E F

A---E: For series number

B---L: Local F: Foreign

C---P: PLCC SMD

D---Year

E---Month

F---SPEC.

PACKING QUANTITY OF BAG :

2000pcs max for T670 series

2000pcs max for T650 series

2000pcs max for S020 series

3000pcs max for T3014 series


DATE CODE: 2011 02 15
 G H I

G--- Year

H--- Month

I --- Day



I Reel Dimensions

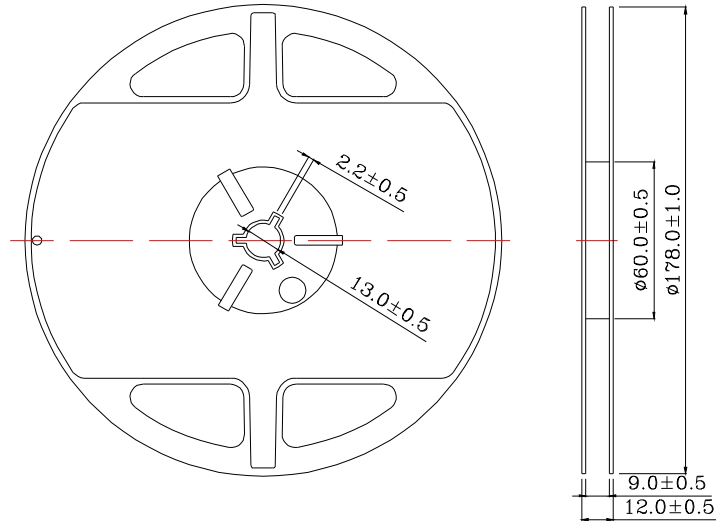


Notes:

1. Taping Quantity : 3000pcs/reel、 2000pcs/reel
2. The tolerances unless noted is ± 0.1 mm, Angle $\pm 0.5^\circ$, Unit: mm.


I Suggest Soldering Pad Dimensions(unit=mm)

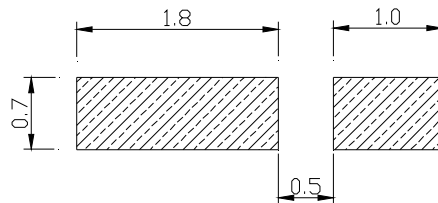


Package Dimensions Of Tape And Reel

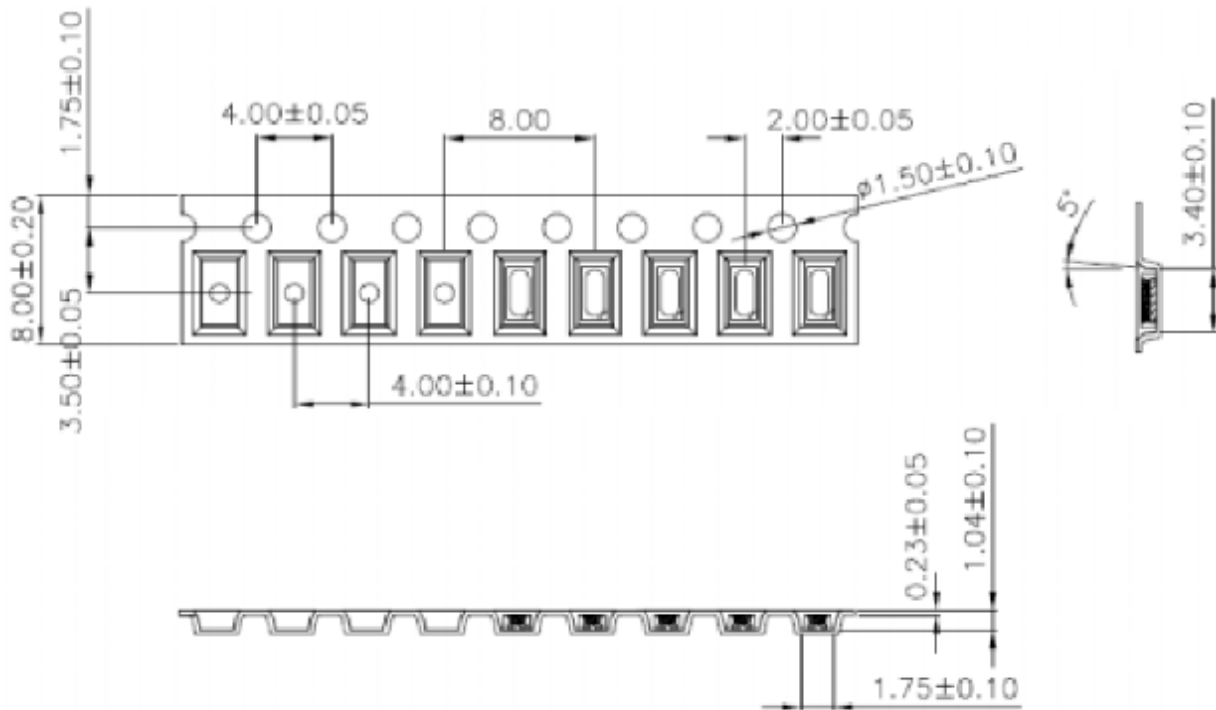

● Suggest reflow Soldering temperature profile:

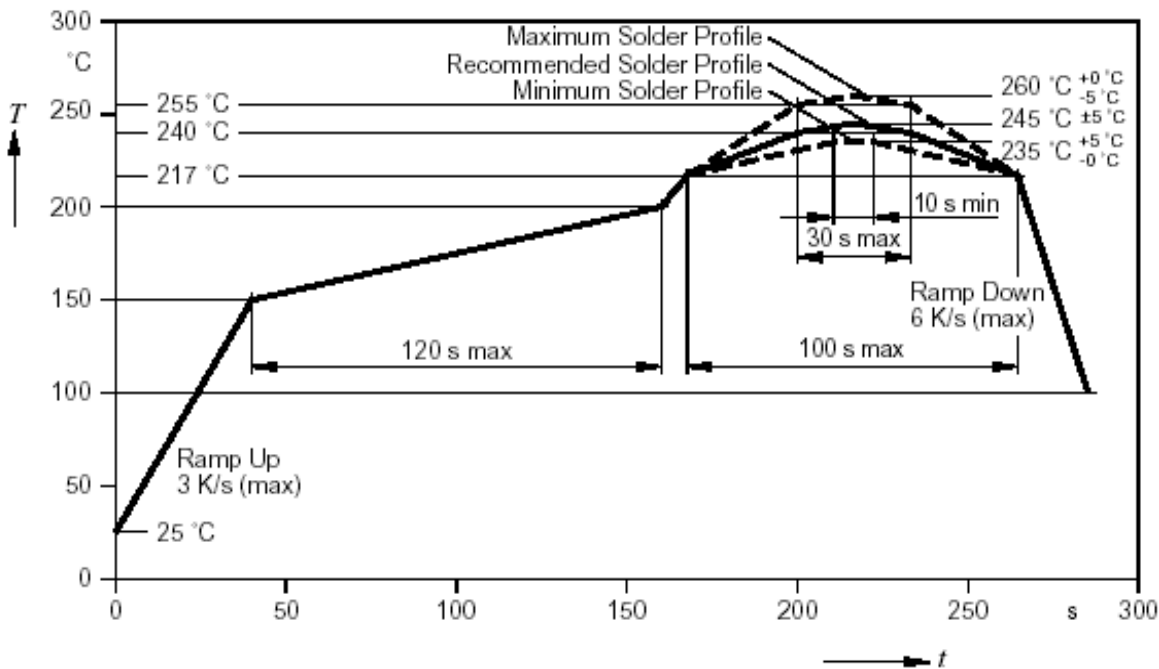

I Moisture Resistant Packaging

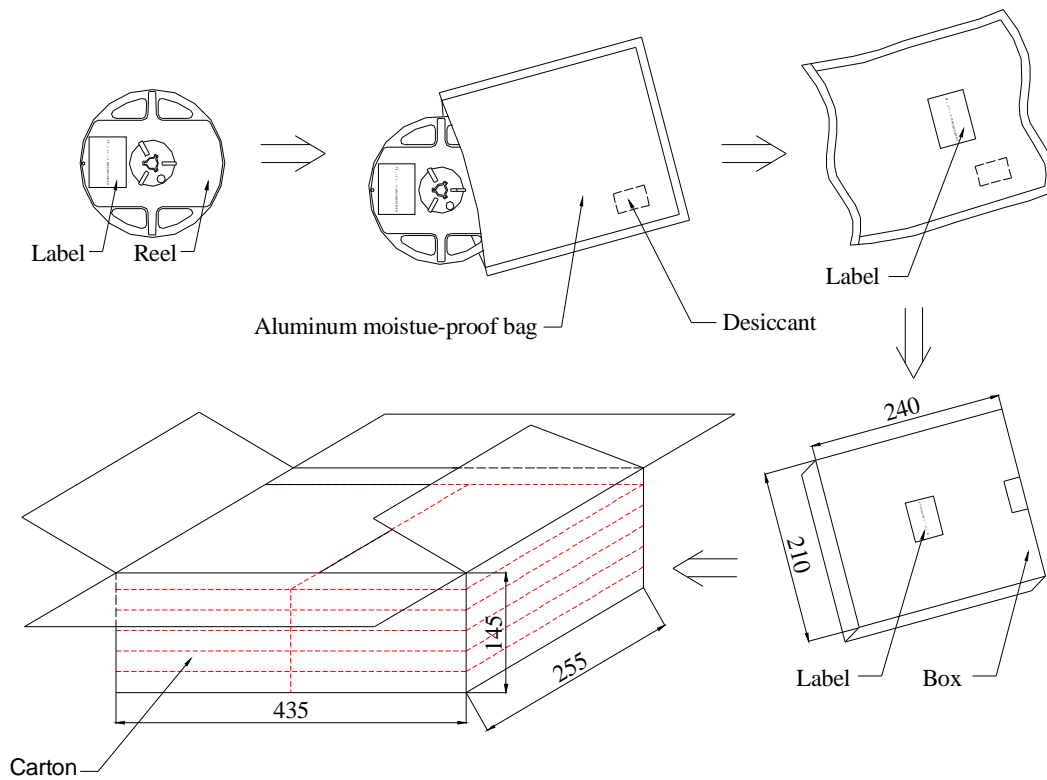

Notes : One reel in a bag, one bag in a inner box, ten inner boxes in a carton. Unit : mm.

I Cleaning

- Ū If cleaning is required , use the following solutions for less than 1 minute and less than 40°C .
- Ū Appropriate chemicals: isopropyl alcohol. (When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not.)
- Ū Effect of ultrasonic cleaning on the LED resin body differs depending on such factors as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be confirm whether any damage to the LEDS will occur.



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

● CAUTIONS

1. Static Electricity:

- * Static electricity or surge voltage damages the LEDs.

It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.

- * All devices, equipment and machinery must be properly grounded.

It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.

- * When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a VF test at a lower current (blew 1mA is recommended).

* Damaged LEDs will show some unusual characteristics such as the leak current remarkably increases, the forward voltage becomes lower, or the LEDs do not light at the low current.

Criteria: (VF>2.0V, at IF=0.5mA)

2. Storage :

- * Before opening the package :

The LEDs should be kept at 30°C or less and 85%RH or less. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

- * After opening the package :

The LEDs should be kept at 30°C or less and 70%RH or less. The LEDs should be soldered within 168 hours (7 days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: more than 24hours at 65±5°C.

- * Please avoid rapid transitions in ambient temperature in high humidity environments where condensation may occur.

3. Soldering:

Do not apply any stress to the LED lens during soldering while the LED is at high temperature.

Recommended soldering condition.

- * Soldering Iron : (Not recommended)

Temperature 350°C Max., Soldering time : 3 sec. Max.(one time only), power dissipation of iron :

20W Max. use SN60 solder of solder with silver content and don't touch LED lens when soldering.

4. Lead-Free Soldering


For Reflow Soldering :

- 1、Pre-Heat Temp: 150-180°C ,120sec.Max.
- 2、Soldering Temp: Temperature Of Soldering Pot Over 240°C ,30sec.Max.
- 3、Peak Temperature: 260°C , 10sec.
- 4、Reflow Repetition: 2 Times Max.
- 5、Suggest Solder Paste Formula : 93.3 Sn/3.1 Ag/3.1 Bi/0.5 Cu

For Soldering Iron (Not Recommended) :

- 1、Iron Tip Temp: 350°C Max.
- 2、Soldering Iron: 30w Max.
- 3、Soldering Time: 3 Sec. Max. One Time.

5. Drive Method

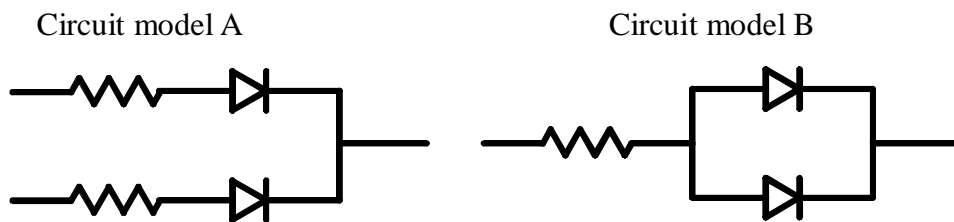

(A)Recommended circuit.

(B)The difference of brightness between LED`s could be found due to the Vf-If characteristics of LED.

6. Reliability

1、Criteria For Judging The Damage

| Item | Symbol | Test Conditions | Criteria for Judgement | |
|--------------------|--------|-----------------|------------------------|--------------|
| | | | MIN. | Max. |
| Forward Voltage | VF | IF=30mA | - | U.S.L.*)×1.2 |
| Reverse Current | IR | VR=5V | - | U.S.L.*)×2.0 |
| Luminous Intensity | IV | IF=30mA | L.S.L**)×0.7 | - |

*) U.S.L.: Upper Standard Level

**) L.S.L: Lower Standard Level



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A / 0

2、 Test Items And Results

| Test Item | Reference Standard | Test Condition | Note | Number of Damaged |
|---|-----------------------------|---|-------------------|-------------------|
| Resistance to Soldering Heat (Reflow Soldering) | JEITA ED-4701300 301 | Tsld=260°C,10sec. (Pre treatment 30 °C,70%,168hrs) | 2times | 0/50 |
| Solder ability (Reflow Soldering) | JEITA ED-4701300 303 | Tsld=215°C,3sec. (Lead Solder) | 1time over 95% | 0/50 |
| Thermal Shock | JEITA ED-4701300 307 | -40°C ~ 100°C 30min. 30min. | 100cycles | 0/50 |
| Temperature Cycle | JEITA ED-4701100 105 | -40°C ~ 25°C~100°C~25°C 30min. 5min. 30min. 5min | 100cycles | 0/50 |
| High Temperature Storage | JEITA ED-4701200- 201 | Ta=100°C | 1000hrs. | 0/50 |
| Temperature Humidity Storage | JEITA ED-4701100 103 | Ta=60°C,RH=90% | 1000hrs. | 0/50 |
| Low Temperature Storage | JEITA ED-4701200 202 | Ta=-40°C | 1000hrs. | 0/50 |
| Steady State Operating Life Condition | | Ta=25°C,IF=30mA | 1000hrs. | 0/50 |
| Steady State Operating Life of High Humidity Heat | | Ta=85°C,RH=85%,IF=30mA | 500hrs. | 0/50 |

7.Others:

The appearance and specifications of the product may be modified for improvement without notice.



SURFACE MOUNT DEVICE LED

Part No. :L-T3014XWDT

REV: A /0

I PART NO. SYSTEM :

L - T 67 0 W D T (Z) - X X X X

XXXX : Special Code
(Such as CCT、 Luminous or others)

Z: With zener
(It not be showed if with no zener)

T : Taping for 7 inch reel

Lens color
C : Water Clear
W : White Diffused
D : Color Diffused

KY : 9mil AlInGap 590nm Super Yellow
KR : 9mil AlInGap 630 nm Super Red
TE(HE) : 14mil AlInGap 624 nm Super Red
TY(HY): 14mil AlInGap590 nm Super Yellow
LB : InGaN ITO rough 470nm Blue
LG(SG) : InGaN ITO rough520nm Green
W : InGaN + YAG White color
.....

0 : Single chip
1/2 : Super thin single chip
5/6 : Dual chip
F : Three chip(Full color)

650 : 3020 1.3T TYPE
670 : 3528 1.9T TYPE
020 : 3812 0.6T TYPE
680: 5630 0.9T TYPE
690: 5050 1.5T TYPE
3014: 3014 0.8T TYPE

T : PLCC Top View Type
S : Side View Type

DRAWING NO. : DS-31P-12-0005

DATE : 2012-3-2 PAGE

19 of 19