

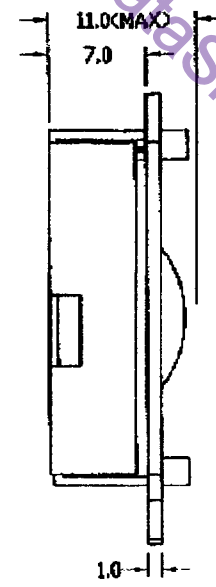


液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

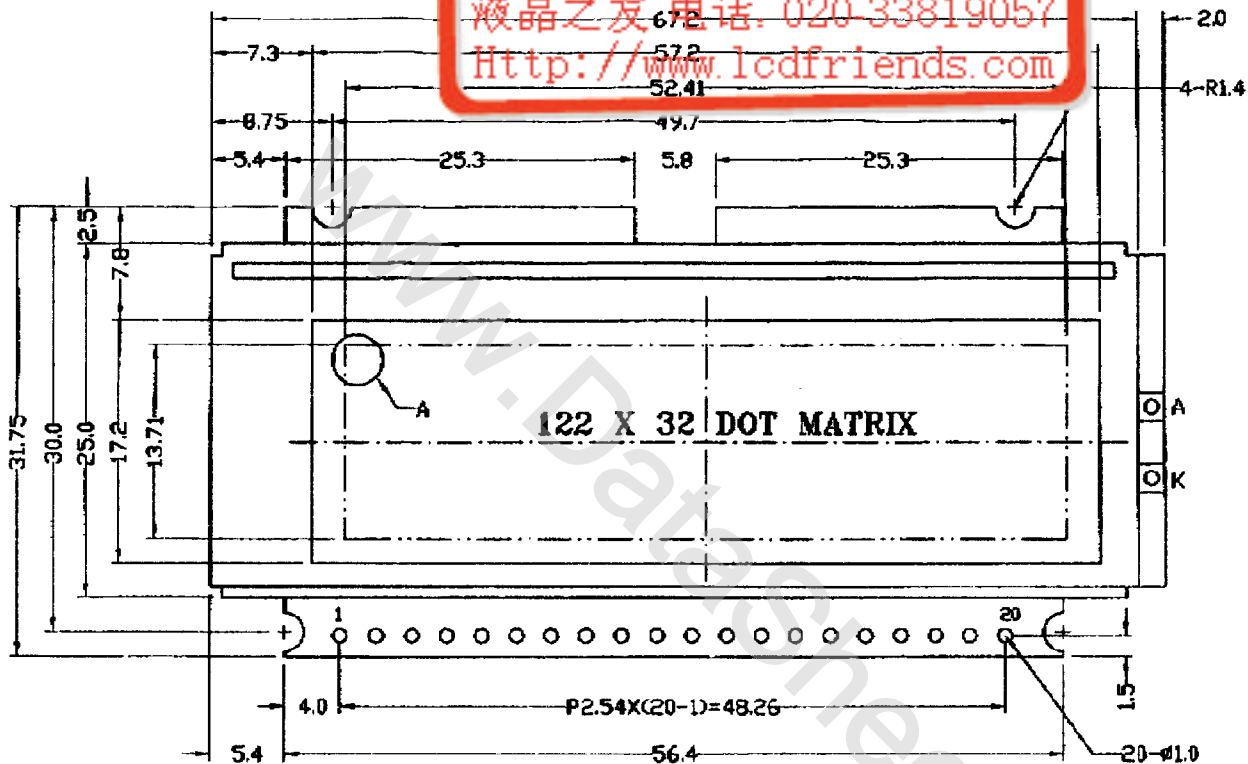

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
V _{SS}	V _{DD}	V _O	V _{OUT}	A0	E1	E2	D0	D1	NC	NC	D2	D3	D4	D5	D6	D7	NC	NC	NC

DETAIL A:



- NOTES:
- 1.DISPLAY TYPE: STN/GREY MODE
 - 2.VIEWING DIRECTION: 6*00
 - 3.POLARIZER MODE: TRANFLECTIVE/POSITIVE
 - 4.OPERATING TEMP: 0°C---+50°C
 - 5.STORAGE TEMP: -20°C---+60°C
 - 6.BEZEL IS TO BE PAINTED BLACK
 - 7.ALL UNMARKED TOLERANCES: ±0.3
 - 8.DRIVE METHOD: DUTY=1/32 BIAS=1/6
 - 9.LCD OPERATING VOLTAGE: 5.9V
 - 10.BACKLIGHT TYPE: LED
 - 11.CONTROLLER: SED1520DDAX2

TIAN-MA MICROELECTRONICS CO.
 22/F., HANGBU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 张斌	TITLE: TM12232E DC6	SCALE:
CHECKED BY: (Signature)	FIG. NO: G-1	UNIT: mm
APPROVED BY: (Signature)	FIG. NAME: tm12232e dc6	SHEET NO: 01
CONFIRMED BY: (Signature)		