



Rev	AWO #	Description	Date	Appr
-		RELEASED	7/8/05	

APPROVED: _____
 DATE: _____ TITLE: _____

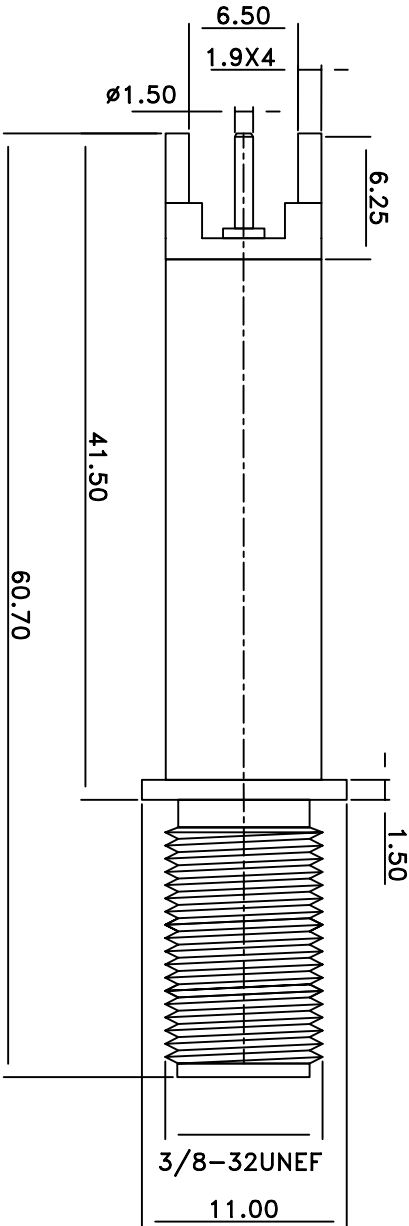

SPECIFICATIONS:

Material:

Insulator: Polypropylene.
 Pin: Brass, Nickel plated
 Body: Brass, Nickel plated

Electrical:

Nominal Impedance: 75 ohms
 Frequency range: 0-3 GHz
 Maximum peak voltage: 500V
 Insulation resistance: 5000 Mohm min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC rms
 Temp range: -40°C to +140°C
 Return loss: 15db at 1GHz
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 230 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	7/8/05
APPROVED	

ADAM TECH
 909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RF CONNECTOR, TYPE F, 75 OHMS
 VERTICAL, PCB

SIZE	PART NO.	REV.
X	RF4-22-P-00-75	-
REF:	SCALE: NTS	SHEET 1 OF 1