


# High Voltage Rectifier Stacks

0.5A • 70ns • Axial Leaded

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS											
Part Number	Working Reverse Voltage (V <sub>rw</sub> )	Average Rectified Current (in oil) (I <sub>o</sub> )		Reverse Current @ V <sub>rw</sub> (I <sub>r</sub> )		Forward Voltage (V <sub>f</sub> )		1 Cycle Surge Current I <sub>p</sub> =8.3ms (I <sub>fsm</sub> )	Repetitive Surge Current (I <sub>frm</sub> )	Reverse Recovery Time (1) (T <sub>rr</sub> )	Case Length (L)
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	in.
SP50UF	5000	0.5	0.33	1.0	25	11.0	1.0	40	8	70	2.00
SP100UF	10000	0.5	0.33	1.0	25	16.0	1.0	40	8	70	3.50
SP150UF	15000	0.5	0.33	1.0	25	24.0	1.0	40	8	70	4.25
SP200UF	20000	0.5	0.33	1.0	25	32.0	1.0	40	8	70	4.25

(1)T<sub>rr</sub> Testing: I<sub>f</sub>=0.5mA, I<sub>r</sub>=1.0A, I<sub>rr</sub>=0.25A \*Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

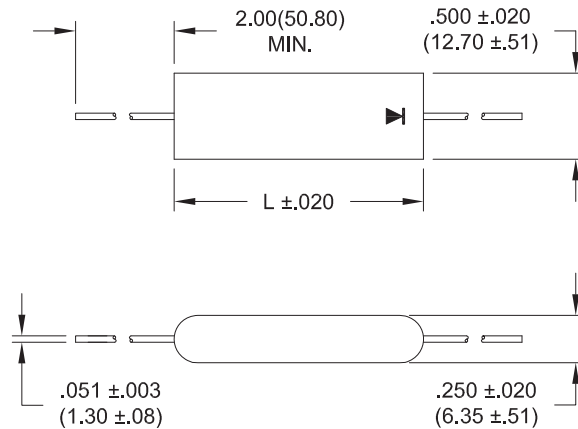

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



Voltage Multipliers Inc.

8711 W. Roosevelt Ave.  
Visalia, CA 93291 USA

Tel: 559.651.1402  
Fax: 559.651.0740

[www.voltagemultipliers.com](http://www.voltagemultipliers.com)  
[www.highvoltagepowersupplies.com](http://www.highvoltagepowersupplies.com)

# SP50UF SP100UF SP150UF SP200UF

