

CMLT6427E

**ENHANCED SPECIFICATION
SURFACE MOUNT SILICON
NPN DARLINGTON TRANSISTOR**



SOT-563 CASE



www.centralemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLT6427E is an Enhanced Specification silicon NPN Darlington transistor. High DC current gains, coupled with a low saturation voltage, make this an excellent choice for industrial/consumer applications where operational efficiency and small size are top priority.

MARKING CODE: C64

FEATURES:

- High current (500mA Max)
- High DC current gain (15K Min)
- Low saturation voltage ($V_{CE(SAT)} = 0.8V$ Max)
- High input impedance
- SOT-563 surface mount package

APPLICATIONS:

- Motor drivers
- Relay drivers
- Pre-amplifier input applications
- Voltage regulator controls

MAXIMUM RATINGS: ($T_A = 25^\circ C$)

◆ Collector-Base Voltage
◆ Collector-Emitter Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Power Dissipation (Note 1)
Power Dissipation (Note 2)
Power Dissipation (Note 3)
Operating and Storage Junction Temperature
Thermal Resistance (Note 1)

SYMBOL		UNITS
V_{CBO}	60	V
V_{CES}	60	V
V_{CEO}	40	V
V_{EBO}	12	V
I_C	500	mA
P_D	350	mW
P_D	300	mW
P_D	150	mW
T_J, T_{stg}	-65 to +150	$^\circ C$
θ_{JA}	357	$^\circ C/W$

ELECTRICAL CHARACTERISTICS: ($T_A = 25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB} = 30V$			100	nA
◆ I_{CEO}	$V_{CE} = 25V$			100	nA
I_{EBO}	$V_{EB} = 10V$			100	nA
◆ BV_{CBO}	$I_C = 100\mu A$	60			V
◆ BV_{CES}	$I_C = 100\mu A$	60			V
BV_{CEO}	$I_C = 10mA$	40			V

◆ Enhanced Specification

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of $4.0mm^2$
(2) FR-4 Epoxy PC Board with copper mounting pad area of $4.0mm^2$
(3) FR-4 Epoxy PC Board with copper mounting pad area of $1.4mm^2$

R3 (29-June 2015)

CMLT6427E

**ENHANCED SPECIFICATION
SURFACE MOUNT SILICON
NPN DARLINGTON TRANSISTOR**




ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
♦ BV_{EBO}	$I_E=10\mu\text{A}$	14			V
♦ $V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=0.5\text{mA}$			0.80	V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=0.1\text{mA}$			0.85	V
♦ $V_{CE(SAT)}$	$I_C=500\text{mA}, I_B=0.5\text{mA}$			1.0	V
$V_{BE(SAT)}$	$I_C=500\text{mA}, I_B=0.5\text{mA}$			2.00	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=50\text{mA}$			1.75	V
♦ h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\text{mA}$	15K		100K	
♦ h_{FE}	$V_{CE}=5.0\text{V}, I_C=100\text{mA}$	25K		200K	
♦ h_{FE}	$V_{CE}=5.0\text{V}, I_C=500\text{mA}$	15K		140K	
f_T	$V_{CE}=5.0\text{V}, I_C=10\text{mA}, f=100\text{MHz}$		200		MHz
C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$			7.0	pF
C_{ib}	$V_{BE}=0.5\text{V}, I_C=0, f=1.0\text{MHz}$			15	pF
NF	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}, R_S=100\text{k}\Omega,$ $f=1.0\text{kHz TO } 15.7\text{kHz}$			10	dB

♦ Enhanced Specification

SOT-563 CASE - MECHANICAL OUTLINE

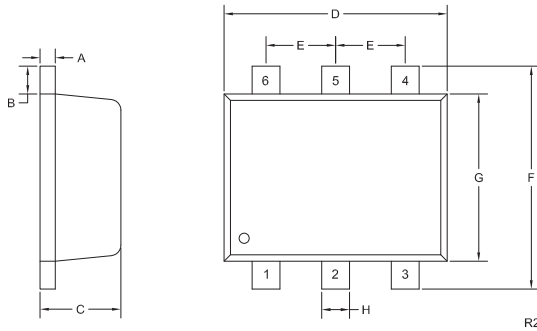

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.0027	0.007	0.07	0.18
B	0.008		0.20	
C	0.017	0.024	0.45	0.60
D	0.059	0.067	1.50	1.70
E	0.020		0.50	
F	0.059	0.067	1.50	1.70
G	0.043	0.051	1.10	1.30
H	0.006	0.012	0.15	0.30

SOT-563 (REV: R2)

LEAD CODE:

- 1) Collector
- 2) Collector
- 3) Base
- 4) Emitter
- 5) Collector
- 6) Collector

MARKING CODE: C64

R3 (29-June 2015)

CMLT6427E

**ENHANCED SPECIFICATION
SURFACE MOUNT SILICON
NPN DARLINGTON TRANSISTOR**



SERVICES

- Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/ Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

LIMITATIONS AND DAMAGES DISCLAIMER: In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R3 (29-June 2015)