


CIRCUIT: SPDT


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC;
2A @250VAC
5. FIXED TERM. & MOVING CONTACT;
Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

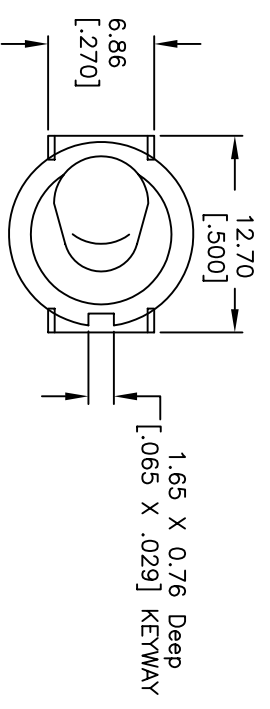

POS. 1 POS. 2

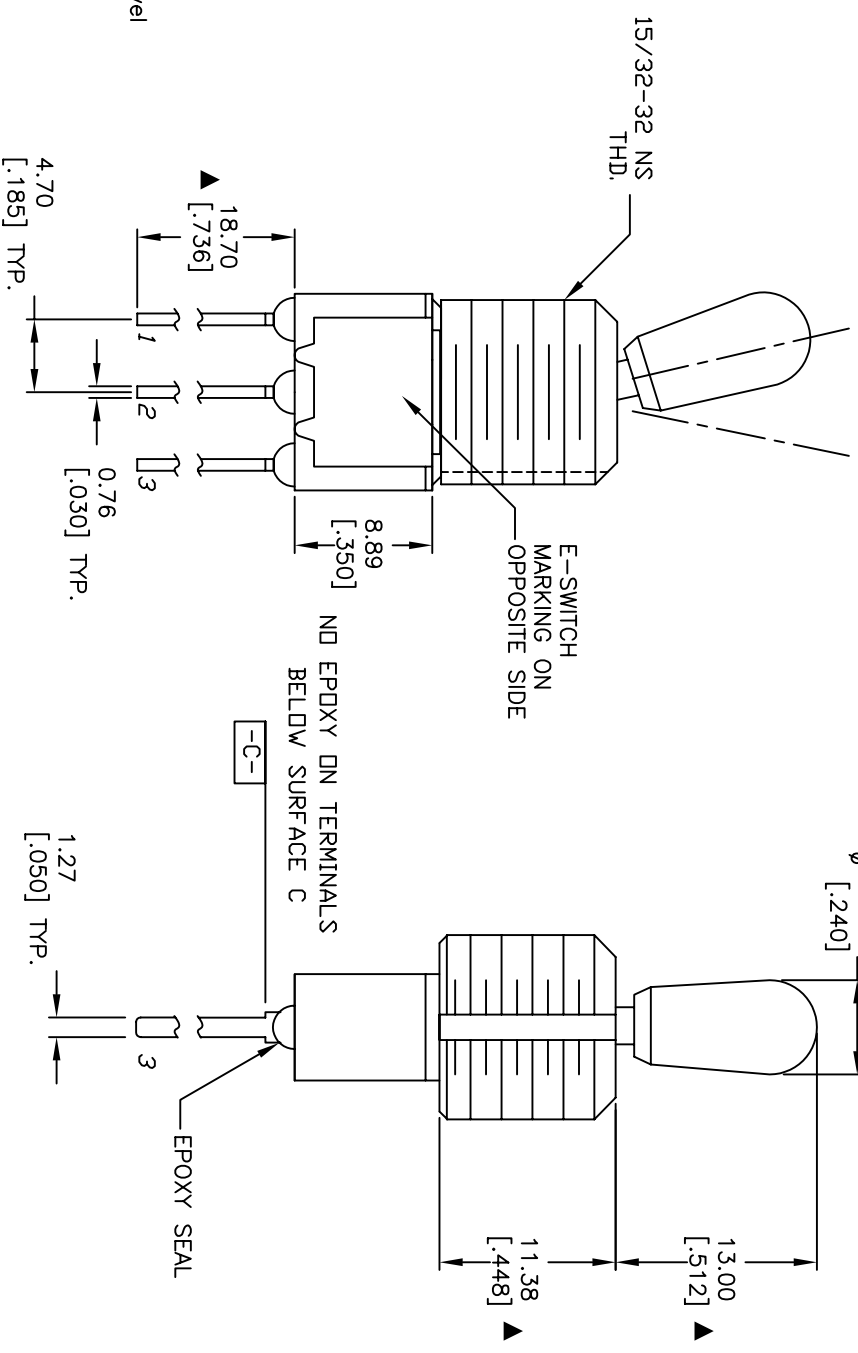

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	15538	DIM FROM 19.05 TO 18.70	11/16/05	PH
C	15511	ADD ROHS NOTE	11/8/05	PH
B	14164	UPDATE ACTUATOR	7/13/04	AR
A	13126	RELEASED FOR PRODUCTION	5/9/03	AR

TITLE		SCALE	DATE	DR	DWG	REV
100SP1T7B13MS1QE		2:1	5/9/03	AR	T111033	D



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED