


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

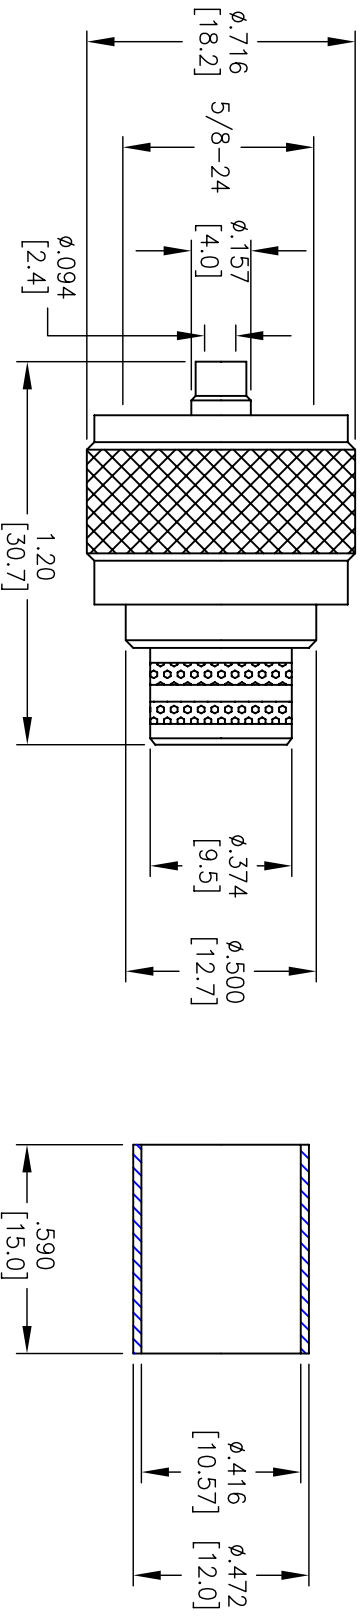

**SPECIFICATIONS**

**Material:**  
 Body: Brass, Nickel plated  
 Ferrule: Brass, Nickel plated  
 Contacts: Brass, Gold plated.  
 Cable recommended: RG 213/U  
 Insulator: Nylon, Color Yellow  
 Coupling Nut: Brass, Nickel plated  
**Electrical**  
 Nominal Impedance: 50 Ohms  
 Frequency Range: 0 – 6 GHz  
 Insulation Resistance: 5000 Mohms min  
 Dielectric Withstanding Voltage: 1000V AC for 1 min.  
**Environmental:**  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

UHF MALE CRIMP, 50 OHMS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		Holes		DATE	
X	± .10	ØXX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXXX	± .010		
APPROVALS		TITLE			
DRAWN	LFJ	UHF MALE CRIMP, 50 OHMS			
CHECKED		SIZE	PART NO.	REV.	
APPROVED		X	RF6-12-N-06-50	-	
REF:		SCALE:	NTS	SHEET	1 OF 1

6 5 4 3 2 1