

DESCRIPTION

FSP220-60LE is an industrial level of switching power supply. The power supply comes to offer the total power capacity up to 220 Watts, and uses unique active PFC (Power Factor Correction) circuit design with its high-load electrical components, makes it to be perfectly used in an industrial environment. In addition, with its full range of input and output electrical features, the power supply is ideally the best choice for server, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.



APPLICATION

For standard, advanced server, NAS and industrial power system.

FEATURES

- 80 Plus
- Low Ripple & Noise
- Output over voltage protection
- Short circuit protection on all outputs
- Resettable power shut down
- INTERNAL 4 cm fan
- 100% burn-in under high ambient temperature(50°C)
- Vacuum-impregnated transformer
- MTBF:100K hours at 25°C
- 100% Hi-pot tested
- Line input fuse protection

WATTAGE

Wattage: 220W

DIMENSION

Dimension: 150mm(L) x 81.5mm(W) x 40.3mm(H)

PRODUCT HIGHLIGHT

Efficiency Level: 80 Plus
Altitude: 2000M
PMBus: For standard, advanced server, NAS and industrial power system.

INPUT SPECIFICATION

Input Range: 90-264 Vac
Input Frequency: 47-63 Hz
Input Current: 115V@ 5.0 Amps-rms maximum
 230V@ 3.0 Amps-rms maximum

GENERAL SPECIFICATION

Efficiency: 80% 230VAC
Voltage: +3.3V, +12V, +5V, +5SB: ±5%
Regulation: -12V: ±10%
PWOK Delay Time: 500ms > PWOK > 100ms


*Output Voltage and Current Rating

	+3.3V	+5V	+12V1	+12V2	-12V	+5Vsb
Ripple-Noise(R-P) mV	50mV	50mV	120mV	120mV	120mV	50mV
Regulation Load %	±5%	±5%	±5%	±5%	±10%	±5%
Output Max.(A)	14A	16A	16A	16A	0.8A	2.5A
Output Min.(A)	0.5A	0.5A	1A	1A	0A	0A

NOTES

- 5V, 3.3V, 12V, -12V Will have the regulation to 10% when all load take off.
- 220W(50°C):3.3V+5V+12V1+12V2=207W 250W
- (25°C):3.3V+5V+12V1+12V2=237W
- The 12V1 and 12V2 total output shall not exceed 17A.
- The +3.3V and +5V total output shall not exceed 90 watts.
- The +3.3V and +5V total output shall not exceed 110 watts
- The total output shall not exceed 250 watts

MECHANICAL SPECIFICATION

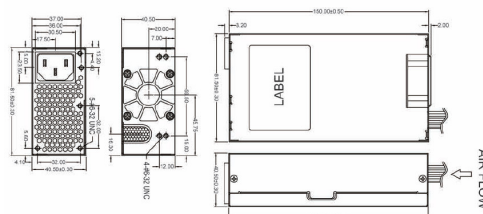

SAFETY STANDARD APPROVAL



OUTPUT SPECIFICATION

Hold up Time: 115V/60Hz 17mSec.
 Minimum@100% Load,
 230V/50Hz 17mSec.
Output Voltage Regulation: Minimum,@100% Load
 +3.3Vdc output : +3.5 Vdc
 minimum, + 4.8Vdc
 maximum
 +5Vdc output : +5.5 Vdc
 minimum, + 6.82Vdc
 maximum
 +12Vdc output : +13.4 Vdc
 minimum, + 15.6Vdc
 maximum
Output Rise Time: 115V-rms/230V-rms 5V
 20ms Maximum
 115V-rms/230V-rms 12V
 20ms Maximum
Ripple & Noise: 3.3V:50mV p-p
 5V:50mV p-p
 12V1:120mV p-p
 12V2:120mV p-p
 -12V:120mV p-p
 5Vsb:50mV p-p
 load < 0.1 Ohm
Short Circuit Protection:

ENVIRONMENTAL SPECIFICATION

TEMP.Range: Storage Temperature: -20°C to + 80°C
MTBF: The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage