

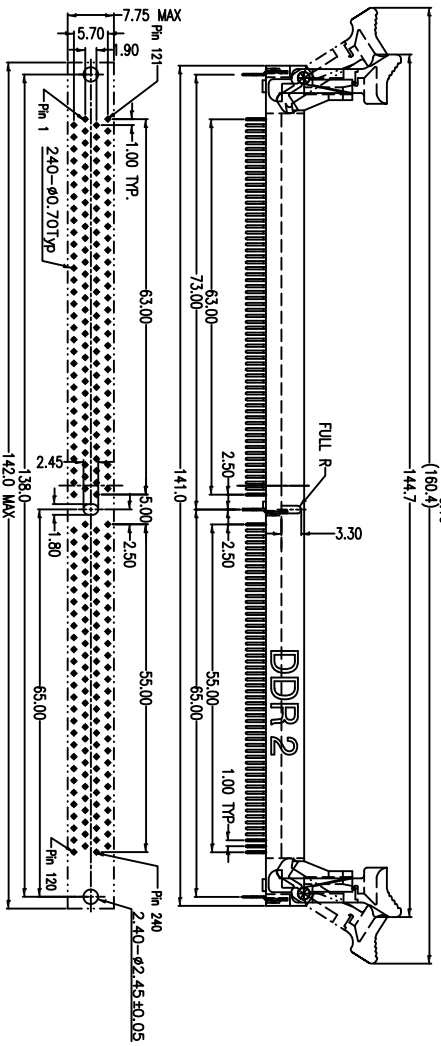

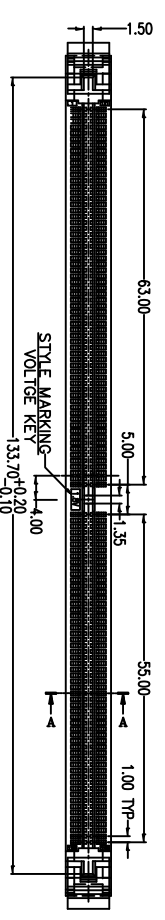


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/11	

APPROVED: _____
 DATE: _____ TITLE: _____



SECT A-A

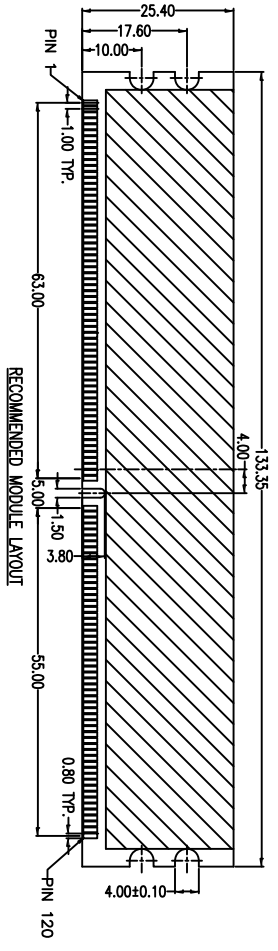

SPECIFICATIONS:

- Material: Nylon 66, Glass filled, rated UL 94V-0
- Insulator color: Black
- Ejector: Nylon 66, rated UL 94V-0 color Ivory
- Contacts: Brass
- Plating: Gold Flash over Nickel on contact area, Tin over Nickel underplate on tails

Electrical:

- Contact resistance: 30 mohms max. initial
- Insulation resistance: 1000 Mohms min @ 500VDC
- Withstand voltage: 500V AC

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

- Lead free, RoHS compliant.
- Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DDR SOCKET, 240P, VERTICAL, PCB MOUNT, 1.8V KEY

SIZE	PART NO.	REV.
X	DDR-240-V-5	-
REF: S00078T	SCALE: NTS	SHEET 1 OF 1