



2CL71 型高压二极管采用可靠性的台面结构及扩散工艺，环氧树脂真空灌注成密闭的封装外形。

High voltage rectifier diodes 2CL71 adopts high reliable mesa structure and diffusion craftwork, epoxy resin molded in a compact sturcture.

■ 特点 Feature

- 雪崩特性 Avalanche characteristic
- 更多的外形尺寸可选 More sizes to choose
- 采用环氧树脂真空封装，表面具有抗腐蚀性
Epoxy resin molded in nacuum, have anticorrosion in the surface
- 工作结温 -40°C ~ +150°C T_j: -40°C ~ +150°C

■ 应用 Application

- 静电除尘用高压整流 High voltage rectifier
- 高压发生器 High voltage generator
- 一般高压电源整流, 倍压装置 General purpose high voltage rectifier, voltage multilier assembly
- 高压测试装置 High voltage testing equipment

■ 最大额定值 (Maximum ratings)

参数名称	符号	测试条件	2CL 71	单位
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	T _a =25°C I _R =2 μA	8	KV
正向平均整流电流 Average Forward Current	I _o		5	mA
非重复峰值浪涌电流 Surge Forward Current	I _{FSM}	正弦半波50Hz, 电阻负载 T _{break} =50°C (50Hz Half-sine Wave, Resistance load T _{break} =50°C)	0.2	A
工作结温Junction Operating Temperature	T _j	正弦半波峰值电压 Halfsine wave peak voltage	125	°C
允许工作环境温度 Operating Ambient Temperature	T _c		100	°C
保存温度 Storage Temperature	T _{stg}		-40~+120	°C


■ 电器特性 (Electrical characteristics)

Rated Value	Sign	Condition	2CL 71	Unit
最大正向峰值电压 Forward Peak Voltage Max	V _{FM}	I _F =200mA	25	V
最大反向恢复时间 Reverse Recovery Time Max	T _{rr}	I _F =5mA	100	nS
最大反向漏电流 Peak Reverse Current	I _{R1}	V _R =V _{RRM} , 25°C	2.0	μA
	I _{R2}	V _R =V _{RRM} , 100°C	5.0	μA
最大结电容 Junction capacitance Max	C _j		2.0	μF



■ 外形图示及尺寸 (Dimension)


Fig

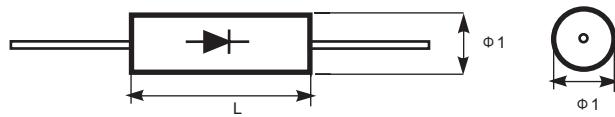


Dimension (Unit : mm)	A	B	C
Φ1	2	2.5	3
L	4.8	6.5	8




■ 特性曲线 (Characteristics curve chart)

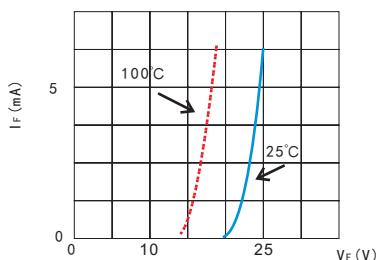


正向特性曲线(2CL71)
Forward characteristics

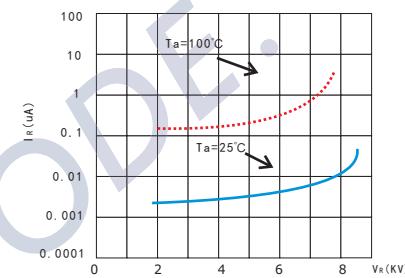

反向特性曲线(2CL71)
Reverse Characteristics

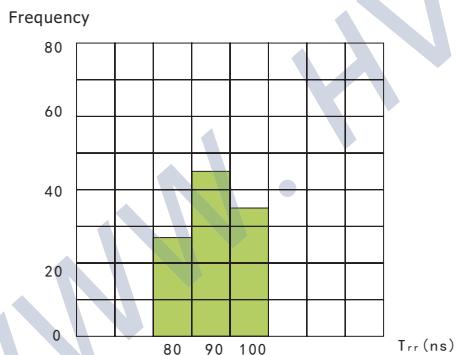

反向恢复时间分布(2CL71)
Reverse Recovery Time Distribution

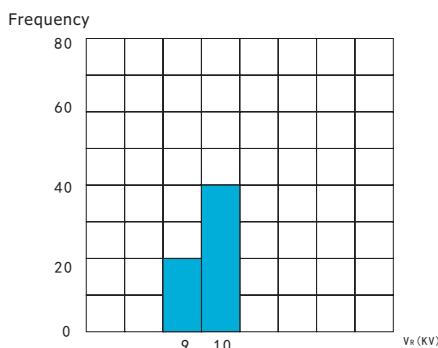

反向雪崩电压分布(2CL71)
Avalanche Breakdown Voltage Distribution

■ 反向恢复时间基本测试电路 (Reverse Recovery Time Basic Test Circuit)

