

Microprocessor Reset IC

Features

- Precision Monitoring of +2.5V and +3V Power-Supply Voltages
- Fully Specified Over Temperature
- Available in Three Output Configurations
 - Push-Pull $\overline{\text{RESET}}$ Output (G674L)
 - Push-Pull RESET Output (G674H)
 - Open-Drain $\overline{\text{RESET}}$ Output (G675L)
- Externally Programmable Time Delay Generator
- 14 μA Supply Current
- Guaranteed Reset Valid to $V_{\text{CC}} = 0.8\text{V}$
- Power Supply Transient Immunity
- 5 pin SOT-23-5 and 6 pin TDFN2X2 Packages
- 2% Threshold Accuracy

Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical μP and μC Power Monitoring
- Portable / Battery-Powered Equipment
- Automotive

General Description

The G674/G675 are microprocessor (μP) supervisory circuits used to monitor the power supplies in μP and digital systems. They provide excellent circuit reliability and low cost and adjustments when used with +2.5V, +3.0V powered circuits.

These circuits perform a single function: they assert a reset signal whenever the V_{CC} supply voltage declines below a preset threshold, with hysteresis keeping it asserted for time delay determined by externally programmable time delay generator after V_{CC} has risen above the reset threshold. Reset thresholds suitable for operation with a variety of supply voltages are available.

The G675L has an open-drain output stage, while the G674 have push-pull outputs. The G675L's open-drain $\overline{\text{RESET}}$ output requires a pull-up resistor that can be connected to a voltage higher than V_{CC} . The G674L have an active-low $\overline{\text{RESET}}$ output, while the G674H has an active-high RESET output. The reset comparator is designed to ignore fast transients on V_{CC} , and the outputs are guaranteed to be in the correct logic state for V_{CC} down to 0.8V.

Low supply current makes the G674/G675 ideal for use in portable equipment. The G674/G675 are available in 5-pin SOT-23-5 and 6 pin TDFN2X2 packages.


Ordering Information

ORDER NUMBER	TEMP. RANGE	PACKAGE (Green)
G674HxxxT1U	-40°C ~ +105°C	SOT-23-5
G674LxxxT1U	-40°C ~ +105°C	SOT-23-5
G675LxxxT1U	-40°C ~ +105°C	SOT-23-5
G674HxxxRB1U	-40°C ~ +105°C	TDFN2X2-6
G674LxxxRB1U	-40°C ~ +105°C	TDFN2X2-6
G675LxxxRB1U	-40°C ~ +105°C	TDFN2X2-6

* xxx specifies the threshold voltage.

e.g. 240 denotes the 2.4V threshold voltage.

Pin Configuration

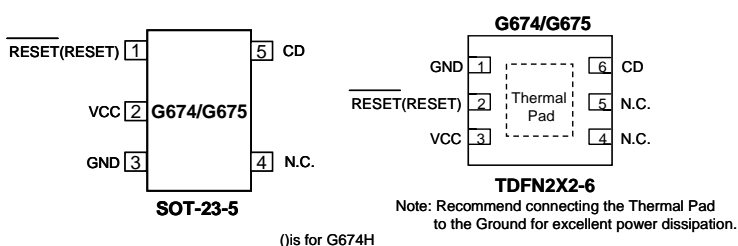

Typical Application Circuit

