


Film, Metallized Polypropylene, Power, C4BS, 1 uF, 5%, 1,200 V, 70C, Lead Spacing = 25mm

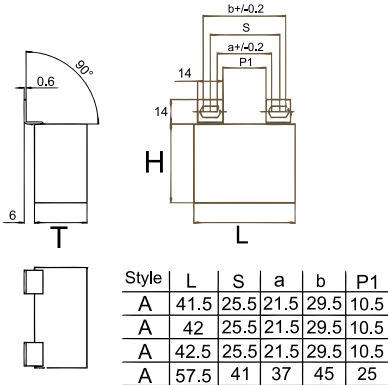

Dimensions	
L	42.5mm NOM
H	37mm NOM
T	28mm NOM
S	25mm +/-0.2mm

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	36

General Information	
Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	C4BS
Features:	IGBT Circuit
RoHS:	Yes
Lead:	Flat Tabs
Miscellaneous:	Kemet Style A Tabs

Specifications	
Capacitance:	1 uF
Capacitance Tolerance:	5%
Voltage DC:	1200 VDC
Voltage AC:	630 VAC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Max dVdt:	965 V
Resistance:	3.3 mOhms (100kHz)
Current:	27 Amps (100kHz 70C), 965 Amps (Peak)
Inductance:	36 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.