
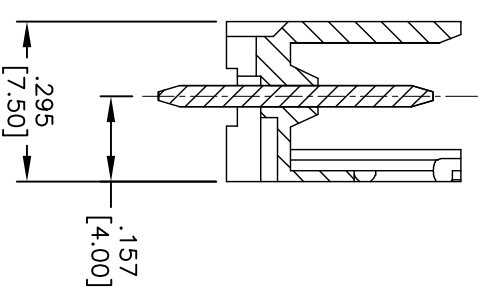
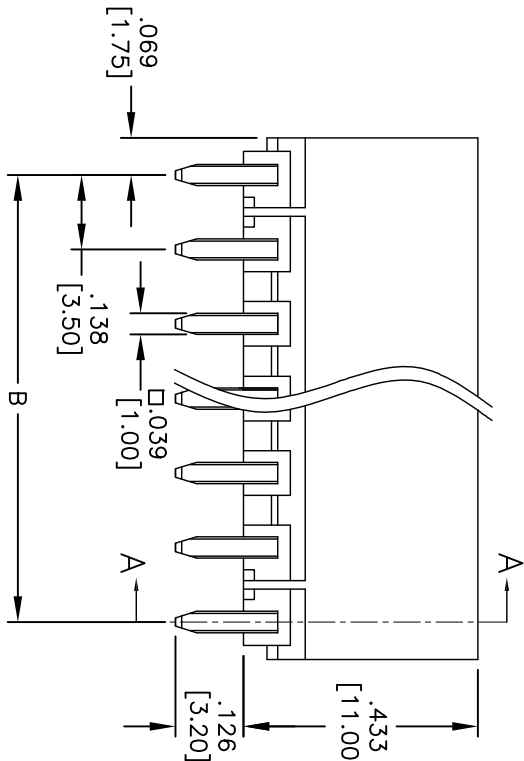
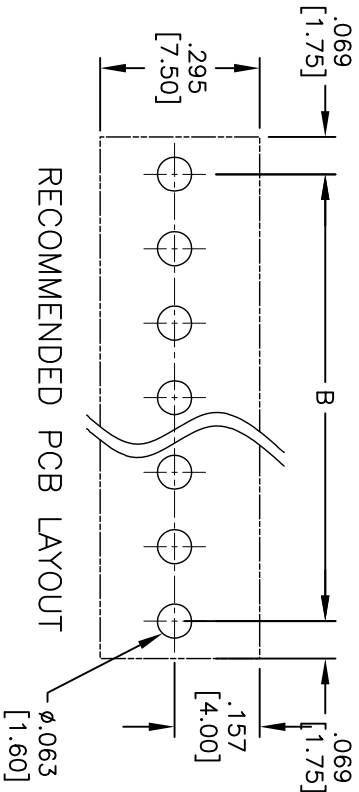


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	

APPROVED: _____
 DATE: _____ TITLE: _____

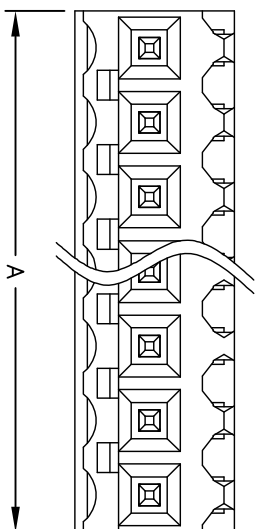

SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated.
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 10 Amps
 Mechanical:
 Withstanding Voltage: 1.6KV
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 24
 A = .138 [3.50] X No. of Positions
 B = .138 [3.50] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, PCB, .138 [3.50] PITCH STRAIGHT

ROHS COMPLIANT

APPROVALS		DATE		TITLE	
DRAWN	AY		2/22/11	SIZE	PART NO.
CHECKED	WV		2/22/11	X	EB99-XX-A
APPROVED				REF:	S00007T

SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1