

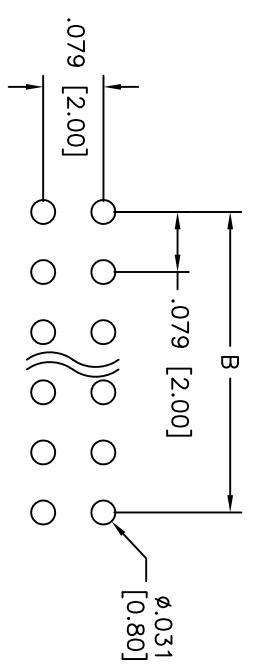
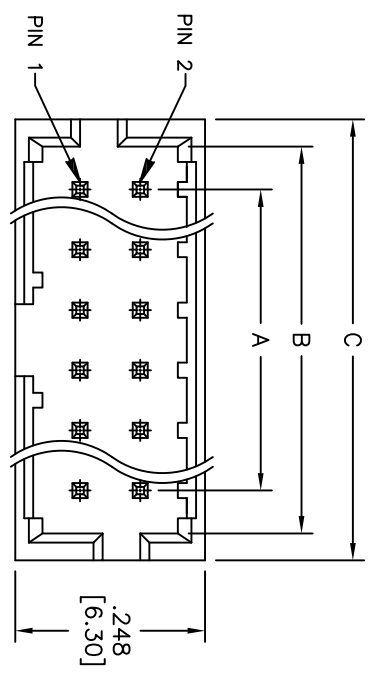


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/19/10	

APPROVED: _____
 DATE: _____ TITLE: _____

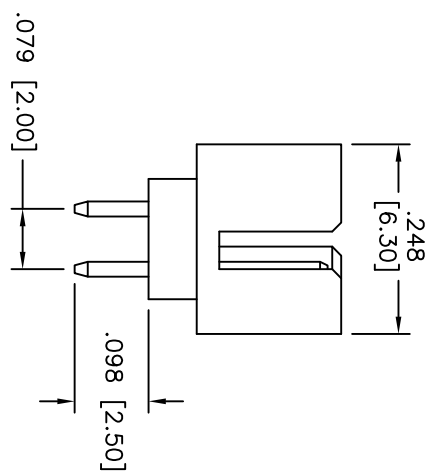

RECOMMENDED PCB LAYOUT

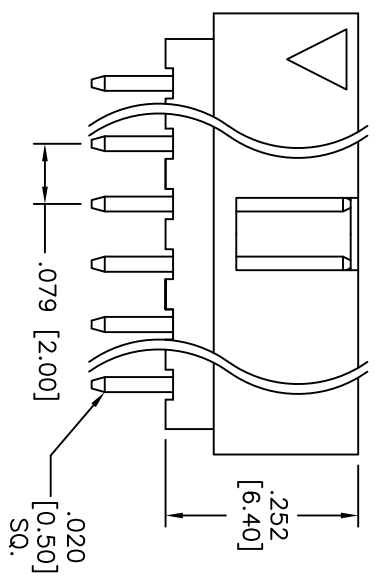

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:
 Gold flash over nickel underplate overall.

Electrical:
 Current rating: 1 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Ratings:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



A = .079 [2.00] x No. of Spaces
 B = .079 [2.00] x No. of Spaces + .112 [2.85]
 C = .079 [2.00] x No. of Spaces + .183 [4.64]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 X .10 ±.10 ØX ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .079 [2.00] BOX HEADER, DUAL ROW,
 STRAIGHT MOUNT, GOLD PLATED

SIZE	PART NO.	REV.
X	2BHR-XX-VUA-SS	-

REF: S00099T SCALE: NTS SHEET 1 OF 1

6

5

4

3

2

1