




STO75GKXXS

Single Thyristor Modules

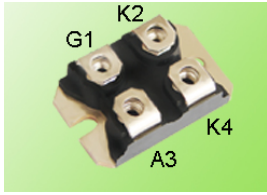

SOT-227B (ISOTOP)

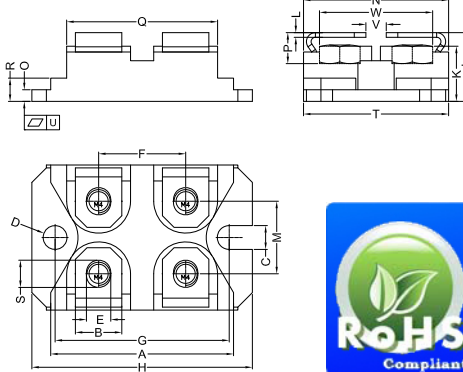

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.489	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	0.05	0.10	0.002	0.004
V	3.30	4.57	0.130	0.180
W	19.81	21.08	0.780	0.830

Type	V _{RSM} V _{DSM} V	V _{RRM} V _{D_{DRM}} V
STO75GK08S	900	800
STO75GK12S	1300	1200
STO75GK16S	1700	1600

Symbol	Test Conditions	Maximum Ratings	Unit
I _{TRMS} I _{TAVM}	T _{VJ} = T _{VJM} T _C = 80°C; (180° sine)	1	A
I _{TSM}	T _{VJ} = 45°C V _R = 0 t = 10ms (50Hz), sine t = 8.3ms (60Hz), sine	1	A
	T _{VJ} = T _{VJM} V _R = 0 t = 10ms(50Hz), sine t = 8.3ms(60Hz), sine	0	
I ² t	T _{VJ} = 45°C V _R = 0 t = 10ms (50Hz), sine t = 8.3ms (60Hz), sine	0 50	A ² s
	T _{VJ} = T _{VJM} V _R = 0 t = 10ms(50Hz), sine t = 8.3ms(60Hz), sine	0 0	
(di/dt) _{cr}	T _{VJ} = T _{VJM} f = 50Hz, t _p = 200us V _D = 2/3V _{D_{DRM}} I _G = 0.3A dig/dt = 0.3A/us	repetitive, I _T = A 500	A/us
	T _{VJ} = T _{VJM} ; R _{GK} = ∞; method 1 (linear voltage rise)	V _{DR} = 2/3V _{D_{DRM}} 1000	V/us
P _{GM} P _{GAVM}	T _{VJ} = T _{VJM} I _T = I _{TAVM} t _p = 30us t _p = 300us	10 5 0.5	W
V _{RGM}		10	V
T _{VJ} T _{VJM} T _{stg}		-40...+125 125 -40...+125	°C
V _{ISOL}	50/60Hz, RMS I _{ISOL} ≤ 1mA	2500	V~
M _d	Mounting torque (M4) Terminal connection torque (M4)	1.1-1.5/9-13 1.1-1.5/9-13	Nm/lb.in.
Weight	typical	30	g

Sirectifier®

STO75GKXXS

Single Thyristor Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_R, I_D	$T_{VJ}=T_{VJM}; V_R=V_{RRM}; V_D=V_{DRM}$	≤ 1	mA
V_T	$I_T=75A; T_{VJ}=25^\circ C$	≤ 1.28	V
V_{TO}	For power-loss calculations only	≤ 0.85	V
r_T		≤ 5.5	m Ω
V_{GT}	$V_D=6V; T_{VJ}=25^\circ C$ $T_{VJ}=-40^\circ C$	≤ 1.5 ≤ 1.6	V
I_{GT}	$V_D=6V; T_{VJ}=25^\circ C$ $T_{VJ}=-40^\circ C$	≤ 100 ≤ 150	mA
V_{GD}	$T_{VJ}=T_{VJM}; V_D=2/3V_{DRM}$	≤ 0.2	V
I_{GD}		≤ 5	mA
I_L	$T_{VJ}=25^\circ C; t_p=10\mu s$ $I_G=0.3A; di_G/dt=0.3A/\mu s$	≤ 450	
I_H	$T_{VJ}=25^\circ C; V_D=6V; R_{GK}=\infty$	≤ 200	
t_{gd}	$T_{VJ}=25^\circ C; V_D=1/2V_{DRM}$ $I_G=0.3A; di_G/dt=0.3A/\mu s$	≤ 2	us
t_q	$T_{VJ}=T_{VJM}; I_T=20A; t_p=200\mu s; di/dt=-10A/\mu s$ typ. $V_R=100V; dv/dt=15V/\mu s; V_D=2/3V_{DRM}$	≤ 150	
R_{thJC}	DC current	≤ 0.45	K/W
R_{thCH}	DC current	≤ 0.10	
d_s	Creeping distance on surface	≤ 8	mm
d_A	Creepage distance in air	≤ 4	
a	Max. allowable acceleration	≤ 50	m/s ²

FEATURES

- *Thyristor controller for AC for mains frequency
- *International standard package SOT-227B (ISOTOP compatible)
- *Isolation voltage 2500V~
- *Glass passivated chips
- *UL File NO. E310749
- *RoHS compliant

APPLICATIONS

- *Switching and control of single and three phase AC Softstart
- *AC motor controller
- *Solid states witches
- *Light and temperature control

ADVANTAGES

- *Easy to mount with two screws
- *Space and weight savings
- *Improved temperature and power cycling
- *High power density

STO75GKXXS

Single Thyristor Modules

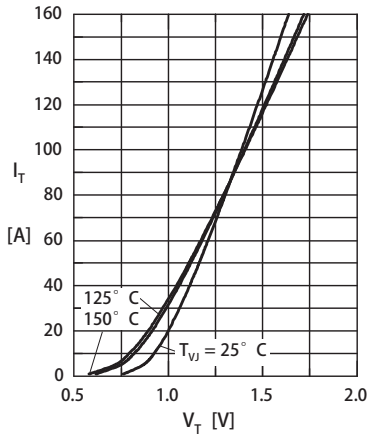


Fig. 1 Forward characteristics

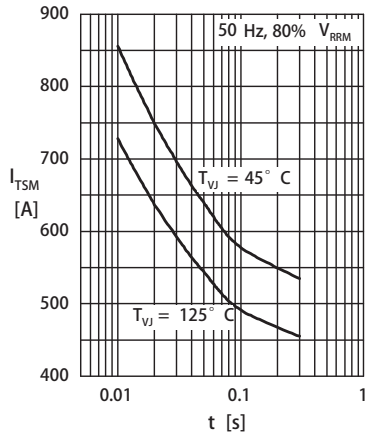


Fig. 2 Surge overload current

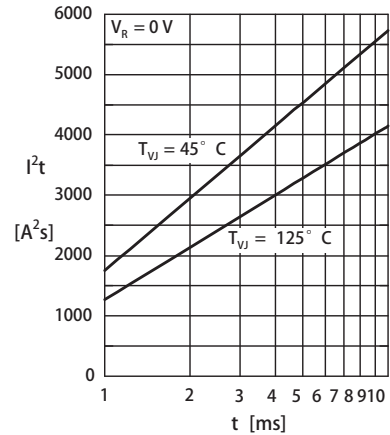


Fig. 3 I^2t versus time (1-10 ms)

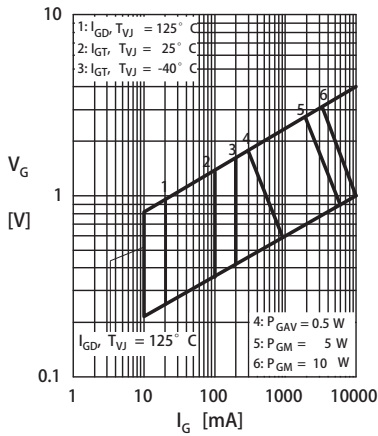


Fig. 4 Gate trigger characteristics

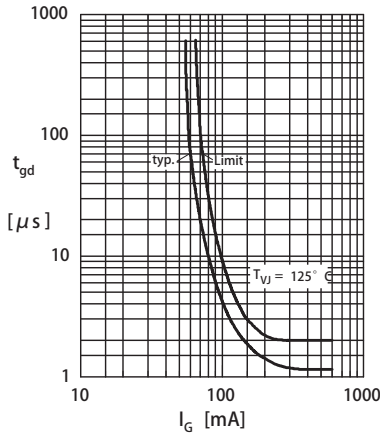


Fig. 5 Gate controlled delay time

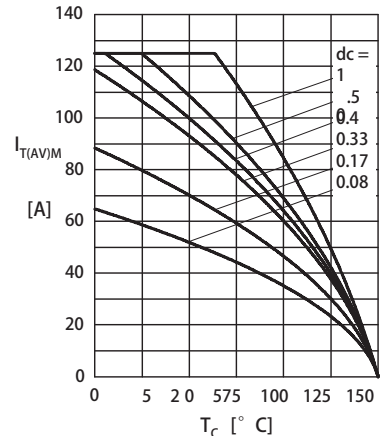


Fig. 6 Max. forward current at case temperature

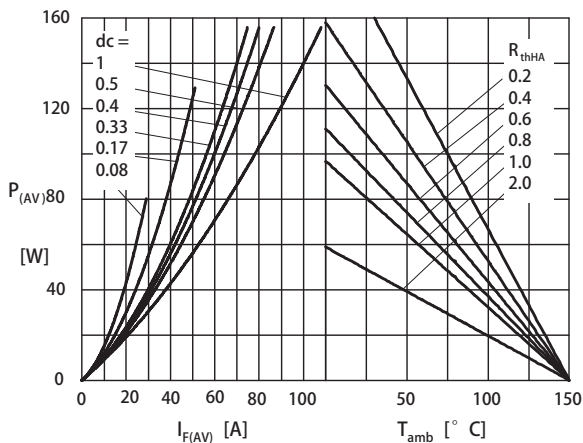


Fig. 7a Power dissipation versus direct output current Fig. 7b and ambient temperature

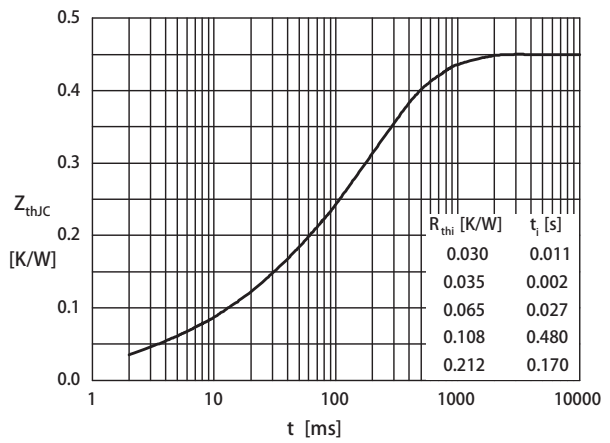


Fig. 8 Transient thermal impedance

