
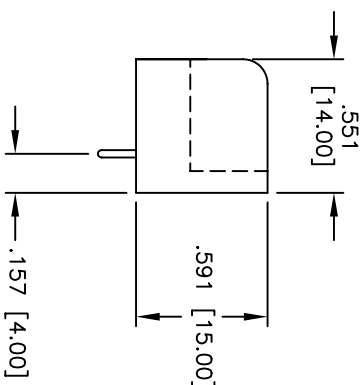
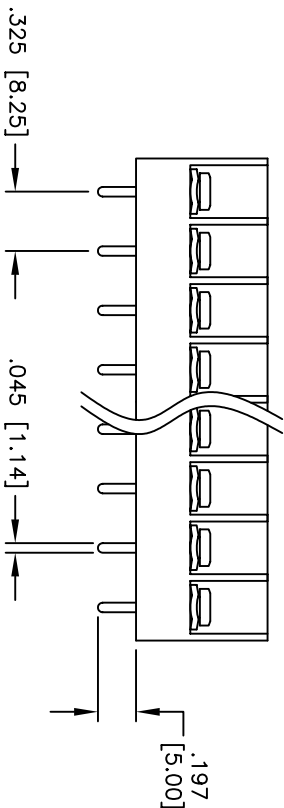


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/23/05	

APPROVED: _____ TITLE: _____
 DATE: _____

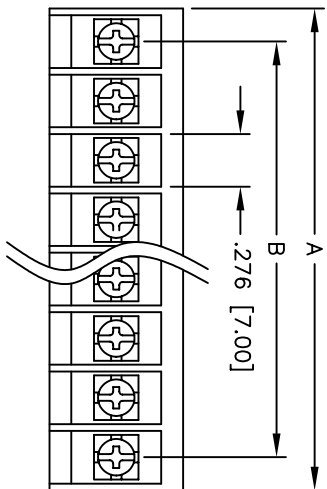

A = .325 [8.25] x No. of Positions + .372 [9.45]
 B = .325 [8.25] x No. of Positions

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass, Tin plated

Screws: Steel, Nickel plated

Hardware: Brass, Tin plated

Electrical:

Operating voltage: 250 VAC max.

Current rating: 15 Amps max.

Insulation resistance: 500 Mohms min.

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.015
 .XX ±.020 ØXXX ±.010
 .XXX ±.015

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE
DRAWN SS	3/23/05
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	TBC-XX-01-B	-

6 5 4 3 2 1