


### 1. Mechanical Dimensions:



### 2. Schematic:

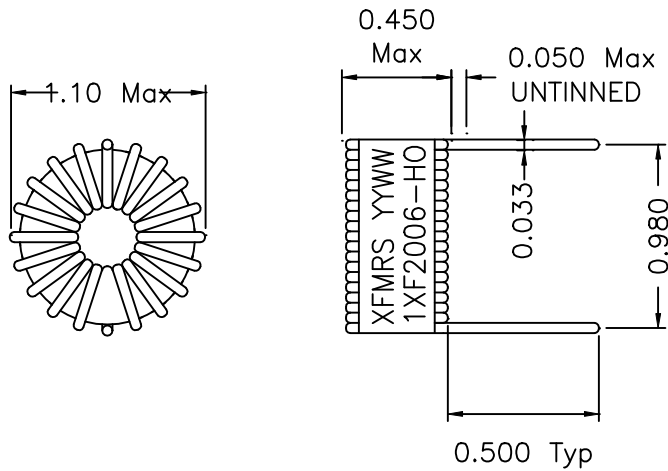

Core: Micrometals T94-26, Philips TN24/15/7.5-2P90  
or equal

### 3. Electrical Specifications: @25°C

Inductance: 200uH±15% @10KHz,1.0V

Rated Current: 2.5Adc

DCR: 0.060 Ohms Max

#### Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV A/2

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

<b>XFMRS Inc</b>	Title: COIL	
	P/N: 1XF2006-HO	REV. A
	DWN. 廖玉坤	Sep-4-03
	CHK. 李清儿	Sep-4-03
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in Inch	APP. BW	Sep-4-03
SHEET 1 OF 1		