





Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

Features

- Halogen free available upon request by adding suffix "-HF" High Voltage:Vceo=300V $\,$
- Small collector output capacitance:Cob=3.0pF(Typ)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Lead Free Finish/Rohs Compliant ("P"Suffix designates RoHS Compliant. See ordering information)

Maximum Ratings


Symbol	Rating	Rating	Unit
V _{CEO}	Collector-Emitter Voltage	300	V
V _{CBO}	Collector-Base Breakdown Voltage	300	V
V _{EBO}	Emitter-Base Voltage	7.0	V
l _c	Collector Current	0.1	А
Pc	Collector Power Dissipation	0.9	W
TJ	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol		Parameter	Min	Max	Units
OFF CHARA	CTERISTIC	S			
$V_{(BR)CEO}$		-Emitter Breakdown Voltage Adc, I _B =0)	300		Vdc
V _{(BR)CBO}	(I _c =100µ	-Base Breakdown Voltage Adc, I _E =0)	300		Vdc
$V_{(BR)EBO}$		Base Breakdown Voltage Adc, I _c =0)	7		Vdc
I _{CBO}		Cutoff Current 40Vdc, I _E =0)		1.0	µAdc
I _{CEO}		Cutoff Current 20Vdc, I _B =0)		5.0	µAdc
I _{EBO}		Cutoff Current Vdc, I _C =0)		1.0	µAdc
ON CHARAC	CTERISTIC	5			
$h_{\text{FE}(1)}$	DC Curre (I _c =20r	ent Gain nAdc, V _{CE} =10Vdc)	30	150	
V _{CE(sat)}		-Emitter Saturation Voltage nAdc, I _B =1mAdc)		1.0	Vdc
V_{BE}		nitter Saturation Voltage nAdc, $I_B=1mAdc$)		1.0	Vdc
Cob	Collector output capacitance V _{CB} =20V, I _E =0, f=1MHz		3		pF
SMALL-SIG	NAL CHAR	ICTERISTICS			
f _T	Transistor Frequency (I _c =20mAdc, V _{cE} =10Vdc, f=30MHz)		50		MHz
CLASSIFIC	ATION OF H	FE (1)			
Rank		0	Y		
Range		30-90	90-150		

2SC2482 2SC2482-0 2SC2482-Y

NPN **Epitaxial Silicon** Transistor

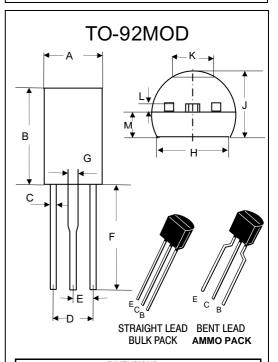

	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.228	.244	5.80	6.20	
В	.331	.346	8.40	8.80	
С	.016	.024	0.40	0.60	
D	.114	.122	2.90	3.10	Straight Lead
D	.173	.220	4.40	5.60	Bent Lead
Е	.059		1.50		Straight Lead
E	.086	.110	2.20	2.80	Bent Lead
F	.543	.559	13.80	14.20	
G	.035	.043	0.90	1.10	
Н	.157	-	4.00		
J	.185	.201	4.70	5.10	
K		.063		1.60	
L	.016	.020	0.40	0.50	
М	.068	.080	1.73	2.03	


of product packaging for details.

www.mccsemi.com

2SC2482



Micro Commercial Components

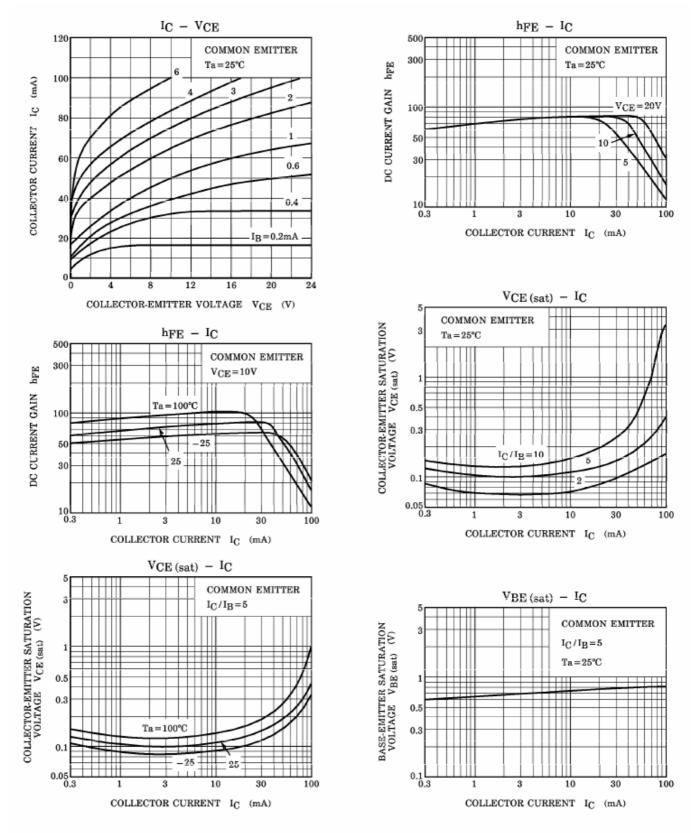


www.mccsemi.com

2 of 4

2SC2482



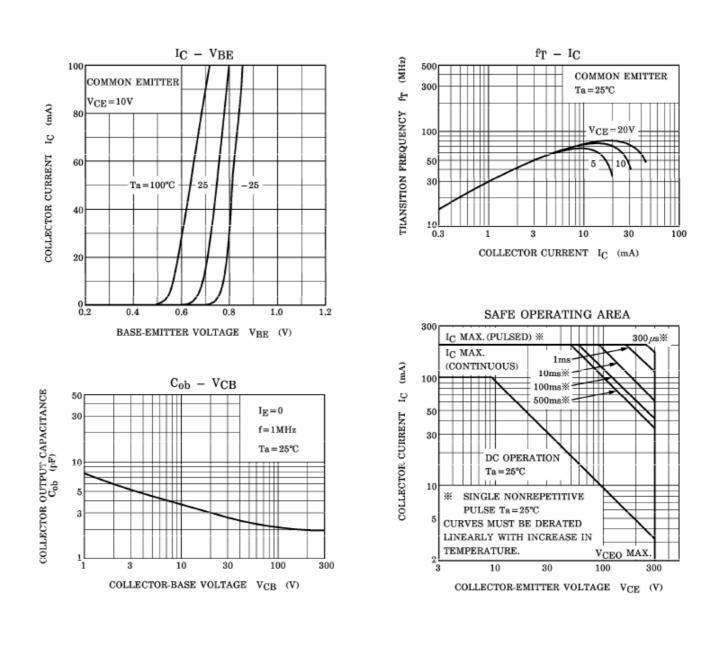

www.mccsemi.com

3 of 4



Ordering Information :

Device	Packing
Part Number-AP	Ammo Packing: 20Kpcs/Carton
Part Number-BP	Bulk: 50Kpcs/Carton

Note : Adding "-HF" suffix for halogen free, eg. Part Number-AP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com