



RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Low collector saturation voltage: $V_{CE(sat)}=1V$ (Max.)

CLASSIFICATION OF h_{FE}

Product-Rank	Y
Range	100-200

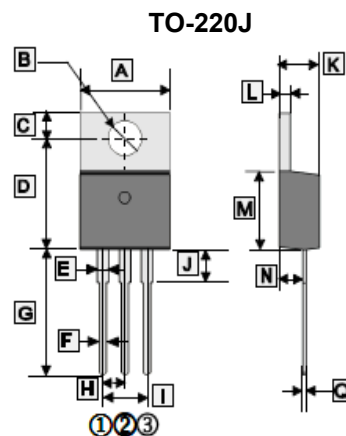

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	9.57	10.57	I	4.68	5.48
B	3.54	4.14	J	2.95	3.96
C	2.54	2.94	K	4.27	4.87
D	11.86	13.26	L	1.07	1.47
E	0.97	1.57	M	8.0	10.0
F	0.51	1.11	N	2.03	2.92
G	12.7	13.8	Q	0.30	0.65
H	2.540 TYP.				

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	7	V
Collector Current	I_C	3	A
Collector Power Dissipation	P_C	2	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	150	$^\circ C$
Junction and Storage Temperature	T_J, T_{STG}	150, -55~150	$^\circ C$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	60	-	-	V	$I_C=0.1mA, I_E=0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	60	-	-	V	$I_C=50mA, I_B=0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	7	-	-	V	$I_E=0.1mA, I_C=0$
Collector Cut-Off Current	I_{CBO}	-	-	100	μA	$V_{CB}=60V, I_E=0$
Emitter Cut-Off Current	I_{EBO}	-	-	100	μA	$V_{EB}=7V, I_C=0$
DC Current Gain	h_{FE}	100	-	200		$V_{CE}=5V, I_C=0.5A$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	1	V	$I_C=2A, I_B=0.2A$
Base to Emitter Voltage	$V_{BE(on)}$	-	-	1	V	$V_{CE}=5V, I_C=0.5A$
Transition Frequency	f_T	-	3	-	MHz	$V_{CE}=5V, I_C=0.5A$
Collector Output Capacitance	C_{ob}	-	35	-	pF	$V_{CB}=10V, I_E=0, f=1MHz$
Turn-on Time	t_{on}		0.65		μS	
Storage Time	t_{stg}		1.3			
Fall Time	t_f	0.65				

CHARACTERISTIC CURVES

