

359.40MHz SAW Resonator
Part No: MA09559

Model: TC0310A
REV NO.: 2

A. FEATURES:

- 1-Port Resonator.

B. MAXIMUM RATING:


1. Input Power Level: 0 dBm
2. DC voltage: 12 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

C. ELECTRICAL CHARACTERISTICS:

Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	359.325	359.4	359.475
Insertion Loss IL	dB		1.3	2.0
Unloaded Quality factor		-	7645	-
Equivalent Elements				
Motional capacitance C1	fF	-	2.918	-
Motional inductance L1	μH	-	67.21	-
Motional resistance R1	Ohm	-	19.85	-
Parallel capacitance Co	pF	-	4.26	-
Temp.coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	-	25	-
Package size		SMD 3.8X3.8X1.4mm		

D. EQUIVALENT CIRCUIT:


One-Port Resonator:

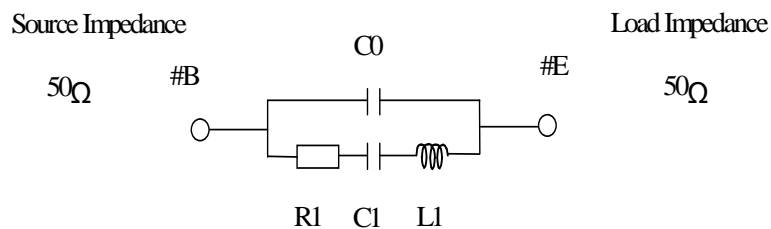


359.40MHz SAW Resonator
Part No: **MA09559**

Model: **TC0310A**
REV NO.: 2

E. FREQUENCY CHARACTERISTICS:

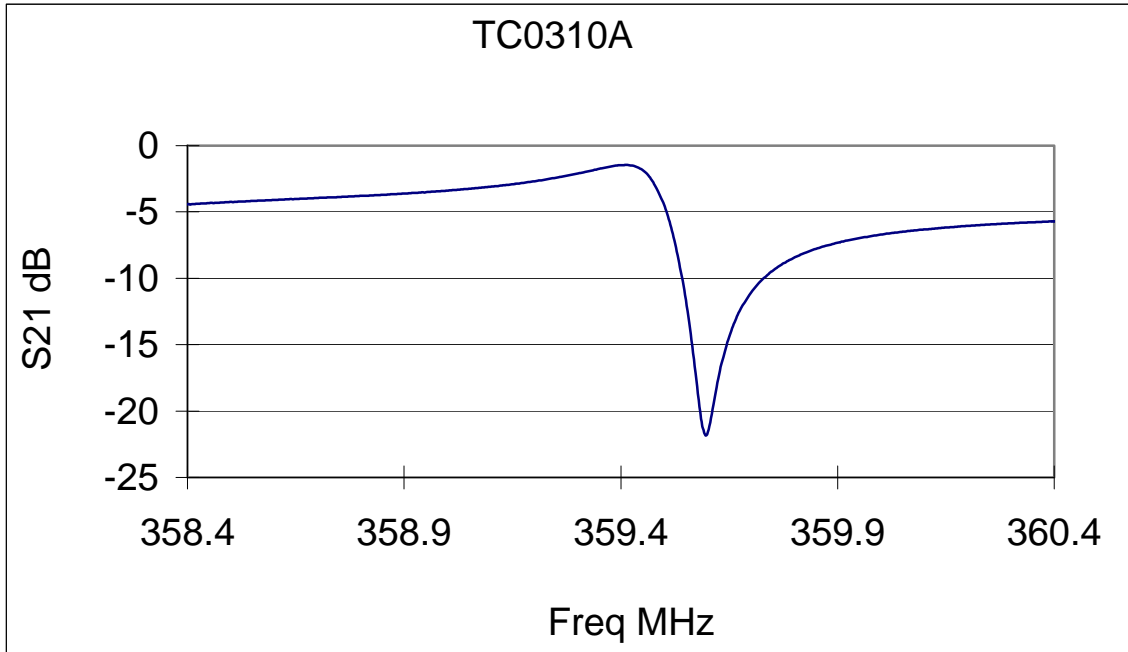


F. TEST CIRCUIT:

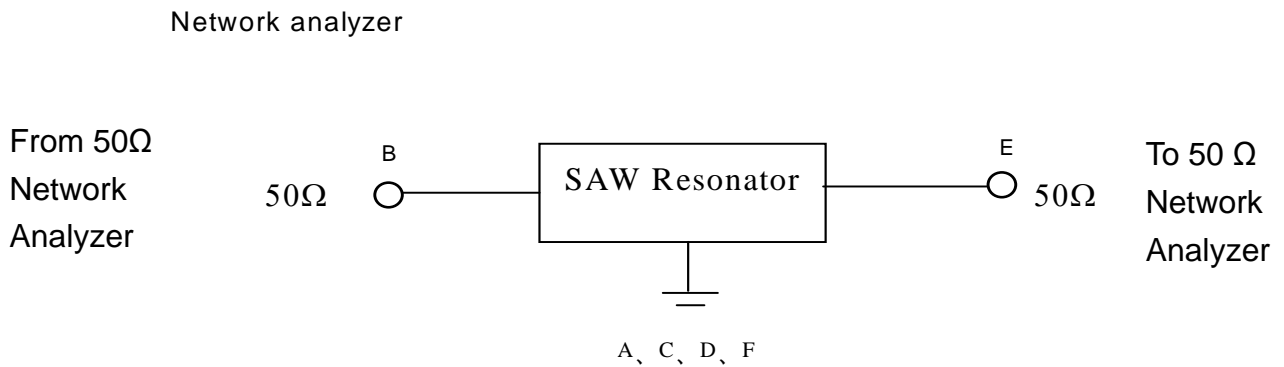


359.40MHz SAW Resonator
Part No: MA09559

Model: TC0310A
REV NO.: 2

G. OUTLINE DRAWING:

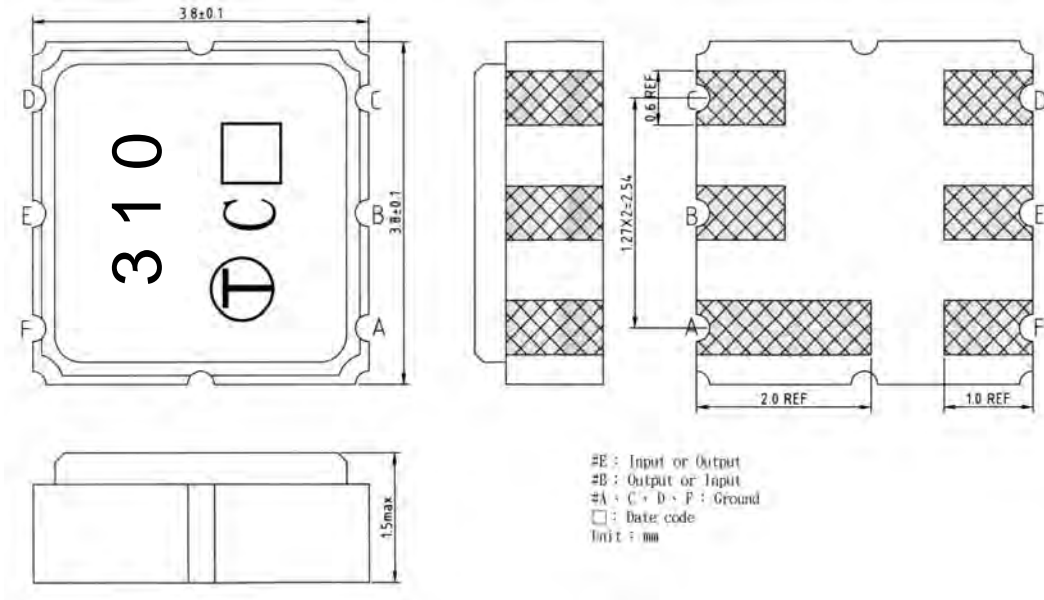

H. PCB FOOTPRINT:

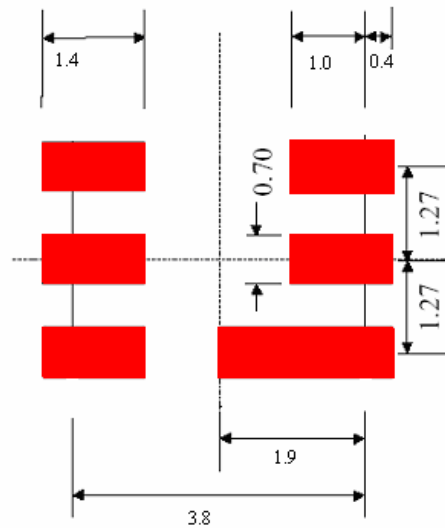


359.40MHz SAW Resonator
Part No: **MA09559**


Model: **TC0310A**
REV NO.: 2

I. PACKING:

1. REEL DIMENSION

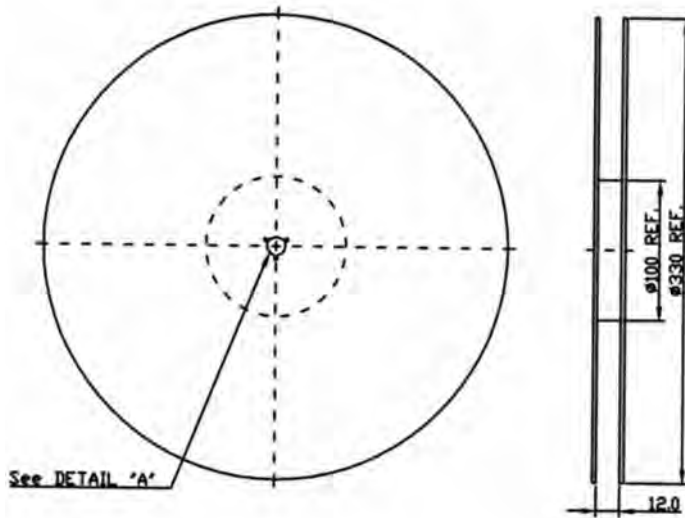

2. TAPE DIMENSION

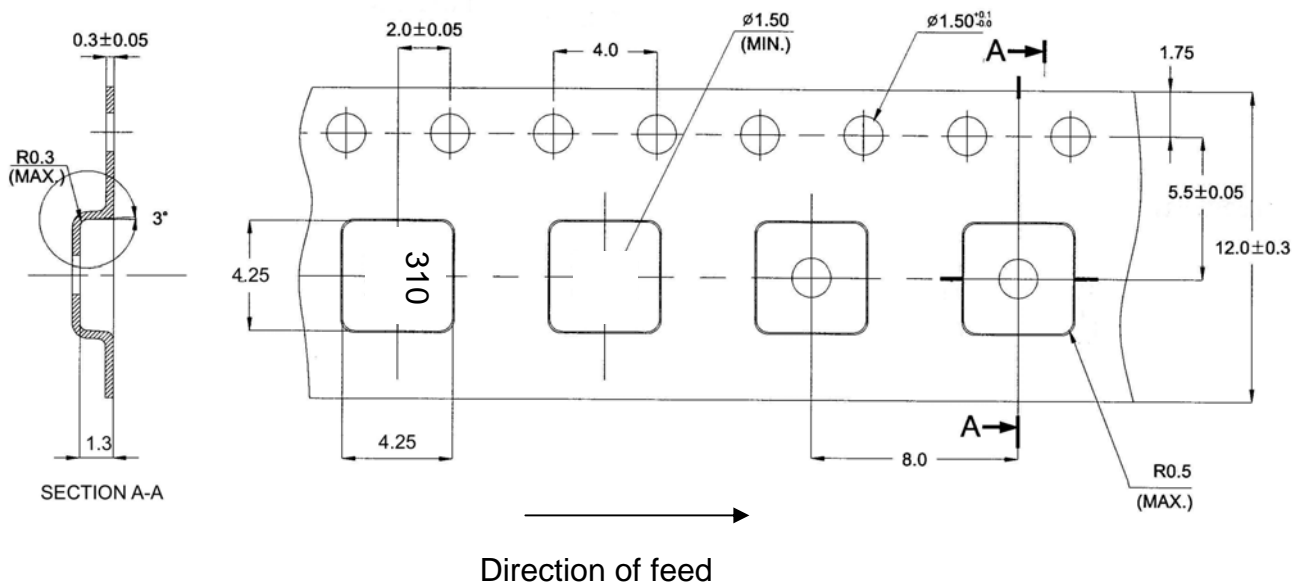

359.40MHz SAW Resonator
Part No: MA09559

Model: TC0310A
REV NO.: 2

J. REFLOW PROFILE

