

SDB540

Schottky barrier diode

Applications

- Switching mode power supply application
- Converter & chopper application


Features

- Low forward voltage: V_{FM} =0.55V Max.
- \bullet Low reverse current: $I_{\text{RRM}} {=}\, 0.5 \text{mA Max}.$
- Low switching loss

Ordering Information

Type No.	Marking	Package Code		
SDB540	SDB540	TO-220F-2L		

Outline Dimensions

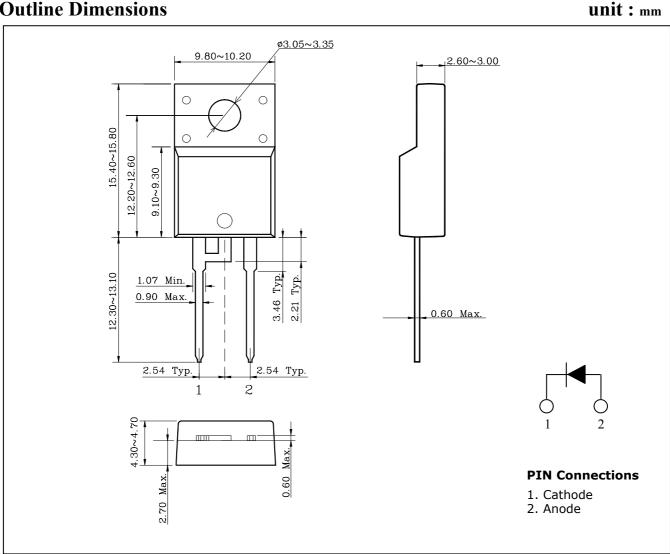

SDB540

Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	40	V
Average rectified output current	I _O	5	Α
Peak surge forward current (Non-repetitive 60Hz sine wave)	I_{FSM}	60	Α
Junction temperature	T ₃	150	°C
Storage temperature range	T _{stg}	-55 ~ 150	°C


Electrical Characteristics


(Ta=25°C)


Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Peak forward voltage	V_{FM}	I _F =5A ¹⁾	-	-	0.55	V
Repetitive peak reverse current	I_{RRM}	V _R =40V	-	ı	0.5	mA
Junction capacitance	C_{j}	V _R =10V, f=1.0MHz	-	200	-	pF
Thermal resistance	R _{th}	Junction to ambient	-	-	62.5	- °C/W
		Junction to case	-	-	4.0	


¹⁾ Pulse test : $t_P \le 380 \,\mu\text{s}$, Duty cycle $\le 2\%$


Electrical Characteristic Curves














The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.