



# Cascadable Amplifier 20 to 500 MHz

A81-3/ SMA81-3

V2

#### **Features**

- HIGH REVERSE ISOLATION >35 dBm (TYP.)
- EXCEPTIONAL OUTPUT VSWR 1.1:1 (TYP.)
- LOW NOISE 3.6 dB (TYP.)
- MEDIUM OUTPUT LEVEL +8.0 dBm (TYP.)

## **Description**

The A81-3 RF amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.


The 2 stage silicon bipolar feedback amplifier design displays impressive performance over a broadband frequency range. An isolation transformer is used in the feedback loop, with the benefit of high reverse isolation.

Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

## **Ordering Information**

Part Number	Package		
A81-3	TO-8		
SMA81-3	Surface Mount		
CA81-3	SMA Connectorized		
CA81-3	SMA Connectorized		

#### **Product Image**

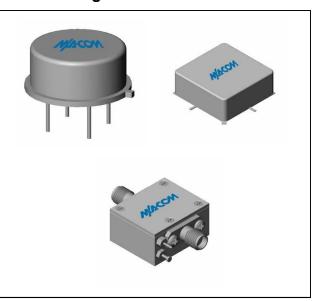

## Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +15 V_{DC}$

Parameter	Units	Typical	Guaranteed	
		25°C	0° to 50°C	-54° to +85°C*
Frequency	MHz	10-500	20-500	20-500
Small Signal Gain (min)	dB	17.0	16.0	15.5
Gain Flatness (max)	dB	±0.2	±0.5	±0.7
Reverse Isolation	dB	36		
Noise Figure (max)	dB	4.0	4.5	5.0
Power Output @ 1 dB comp. (min)	dBm	8.0	7.5	7.0
IP3	dBm	+20		
IP2	dBm	+28		
Second Order Harmonic IP	dBm	+32		
VSWR Input / Output (max)		1.5:1 / 1.1:1	1.8:1 / 1.3:1	2.0:1 / 1.3:1
DC Current @ 15 Volts (max)	mA	29	31	33

## **Absolute Maximum Ratings**

Parameter	Absolute Maximum	
Storage Temperature	-62°C to +125°C	
Case Temperature	125°C	
DC Voltage	+17 V	
Continuous Input Power	+10 dBm	
Short Term Input power (1 minute max.)	50 mW	
Peak Power (3 µsec max.)	0.5 W	
"S" Series Burn-In Temperature (case)	125°C	

#### Thermal Data: $V_{CC} = +15 V_{DC}$

Parameter	Rating	
Thermal Resistance $\theta_{jc}$	45°C/W	
Transistor Power Dissipation P <sub>d</sub>	0.157 W	
Junction Temperature Rise Above Case T <sub>jc</sub>	7°C	

<sup>\*</sup> Over temperature performance limits for part number CA81-3, guaranteed from 0°C to +50°C only.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

<sup>•</sup> North America Tel: 800.366.2266 / Fax: 978.366.2266

<sup>•</sup> Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298






## **Cascadable Amplifier** 20 to 500 MHz

A81-3/ SMA81-3


#### Typical Performance Curves at +25°C

## Gain -- 45 C 485 C -- -105 0 FREQUENCY - MHz Noise Figure 300 500 FREQUENCY - MHz Power Output\* CWER DUTAUT. +85 € FREQUENCY - MHz \*et 1 dB Gain Compression Intercept Point 254 DRDER FREQUENCY - MHz VSWR INPUT QUITPUT-200 400 500 FREQUENCY - MHz


## Outline Drawing: TO-8 \*

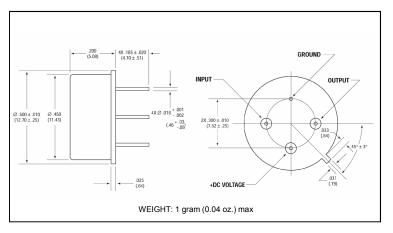

## Outline Drawing: Surface Mount \*

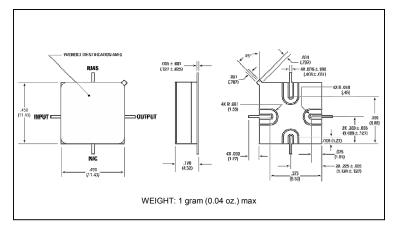

## Outline Drawing: SMA Connectorized \*

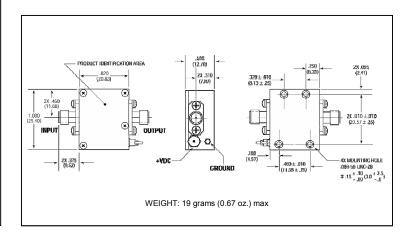

- \* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.
  - North America Tel: 800.366.2266 / Fax: 978.366.2266 • Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298