


## SILICON GENERAL PURPOSE 1.0 AMP DIODES



DIM	INCHES		MILLIMETER	
	MIN.	MAX.	MIN.	MAX.
A	0.028	0.034	0.71	0.86
B	0.08	0.107	2.03	2.74
C	0.160	0.205	4.10	5.20
D	1.0		25.4	

$I_o$  \_\_\_\_\_ 1 Amp \_\_\_\_\_ @ \_\_\_\_\_ 50 \_\_\_\_\_ C

$I_s$  \_\_\_\_\_ 30 \_\_\_\_\_ AMPS




$V_f$  \_\_\_\_\_ 1.4 max. \_\_\_\_\_ v @ \_\_\_\_\_ 1.0 amp \_\_\_\_\_ @ \_\_\_\_\_ 25 \_\_\_\_\_ C

$I_r$  \_\_\_\_\_ 10 uA max. \_\_\_\_\_ @ \_\_\_\_\_ PIV \_\_\_\_\_ @ \_\_\_\_\_ 25 \_\_\_\_\_ C

STYLE \_\_\_\_\_ DO - 41 Plastic

PIV (VOLTS)	P/N	P/N
50	BA5A5	1N4001
100	BA5B5	1N4002
200	BA5C5	1N4003
300	BA5D5	
400	BA5E5	1N4004
500	BA5F5	
600	BA5G5	1N4005
700	BA5H5	
800	BA5K5	1N4006
1000	BA5M5	1N4007
1200	BA5N5	
1500	BA5P5	

(203) 467-2591 TEL  
 (203) 469-5928 FAX  
 Email: Info@edal.com  
 Internet: <http://www.edal.com>

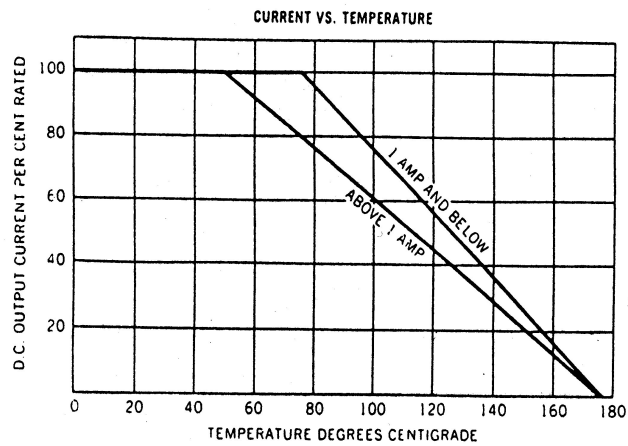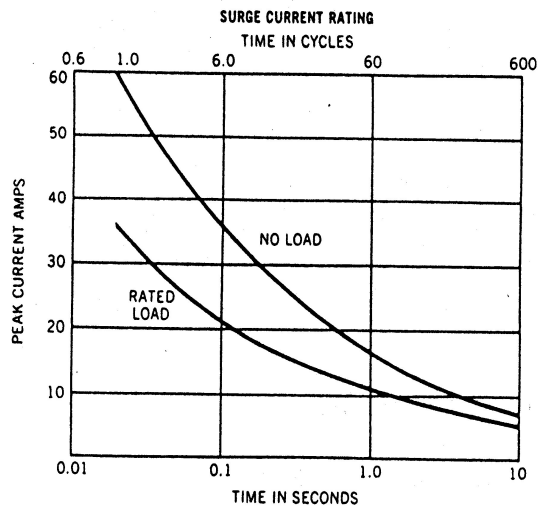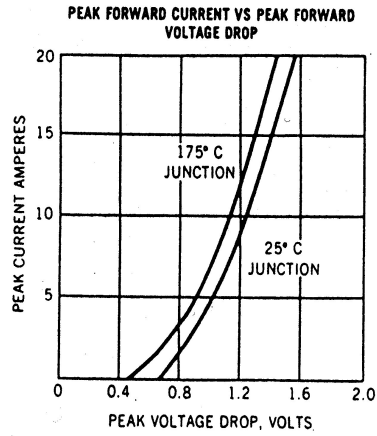

(203) 467-2591 TEL  
 (203) 469-5928 FAX  
 Email: [Info@edal.com](mailto:Info@edal.com)  
 Internet: <http://www.edal.com>

***EDAL*** industries, inc.  
 51 Commerce St. East Haven, CT 06512