


# Highpass Filter

KR Model  
2290-35


## Passband Amplitude & Group Delay

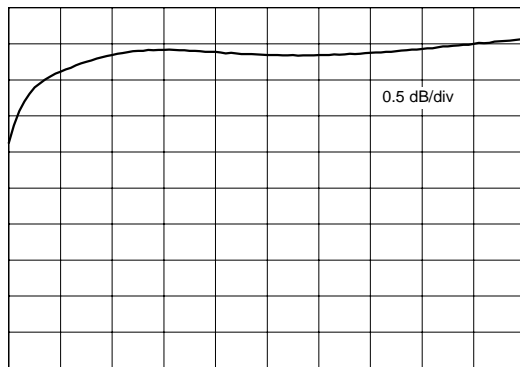

35 MHz

100 MHz

## Overall Amplitude

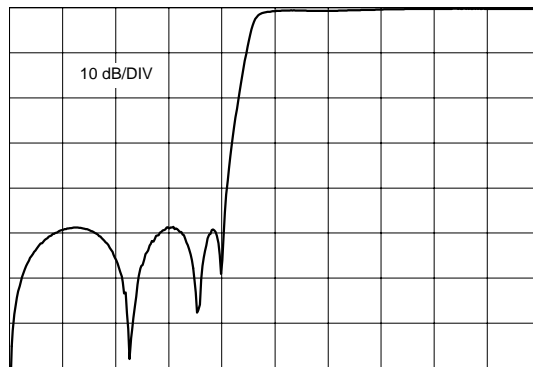


100 KHz

75 MHz

## Specifications

KR Part Number	2290-35
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >45 dB	30.3 MHz
Start of Passband < 4 dB	35 MHz
Source and Load Impedance	50 $\Omega$

## Outline Drawing

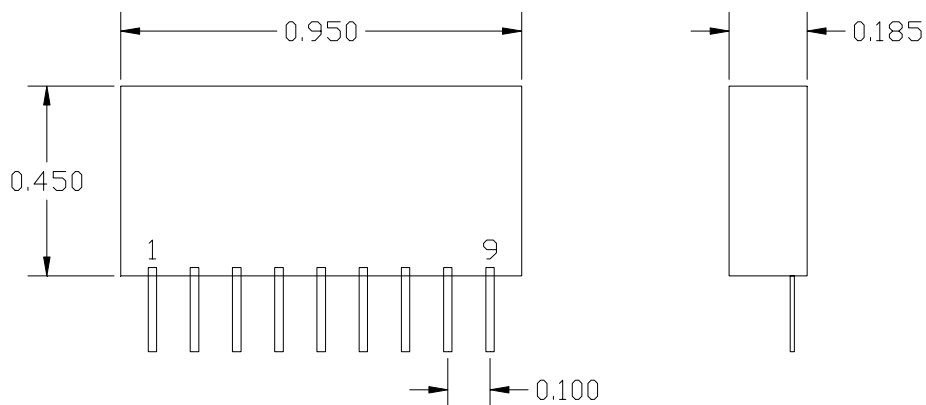

PIN 1 - INPUT  
 PIN 9 - OUTPUT  
 PIN 2 THRU 8 - GROUND  
 UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED

KR Electronics  
 www.krfilters.com  
 91 Avenel Street  
 Avenel, NJ 07001  
 732-636-1900