



Data Sheet

 telephone
949 252 0522

BACK

Product Category: IF SAW Filter

Part Number	Package	Application	Last Modified
815-IF44.0M-A	15.9 x 5.9 Thru Hole	Digital Cable TV	May 22 2003

TYPE :

44.00 MHz Bandpass Filter
6.2 MHz Bandwidth

PART NUMBER :


815-IF44.0M-A

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS


PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency	-	44.00	-	MHz
Insertion Loss	-	16.0	17.0	dB
3 dB Bandwidth	6.15	6.2	-	MHz
35 dB Bandwidth	-	7.8	8.0	MHz
Lower Sidelobe (35.0 ~ 39.90 MHz)	40	43	-	dB
Upper Sidelobe (48.1 ~ 50.0 MHz)	35	38	-	dB
Upper Sidelobe (50.0 ~ 55.0 MHz)	38	42	-	dB
Passband Ripple	-	0.6	1.0	dB
Ambient Temperature	-	25	-	°C

* Custom SAW IF Filters available. Contact Oscilent for assistance.

PACKAGE OUTLINE (mm)

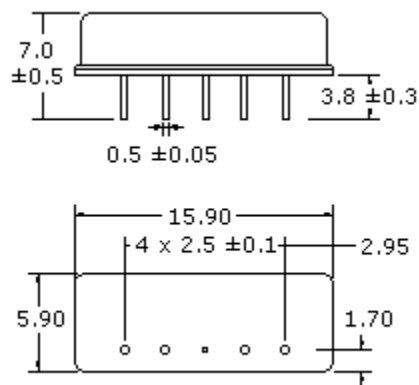

TEST FIXTURE

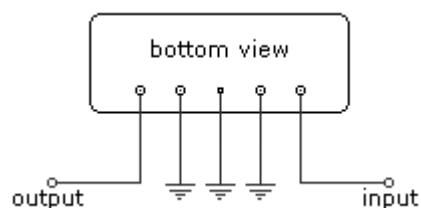

Source Impedance = 50 ohms
Load Impedance = 2 Kohms / 3pF

Oscilent Corporation - CALL 949.252.0522

Part No.: 815-IF44.0M-A

18195 East McDermott Street, Building D, Irvine, CA 92614, USA
Fax: 949.252.0599, E-Mail: Sales@Oscilent.com