

KR Series 2338 Lowpass Filter

General Description

KR Series 2338 are group delay equalized lowpass filters. The filter's flat passband response and group delay equalization make them good choices for video applications. Cutoff frequencies can be specified from 10 MHz to 50 MHz.

Features

- Flat passband response
- Group delay equalized
- Surface mount package

Typical Performance

Passband Response $f_c=30$ MHz
(0.1 dB/div & 5 nsec/div) 100 KHz to 30 MHz

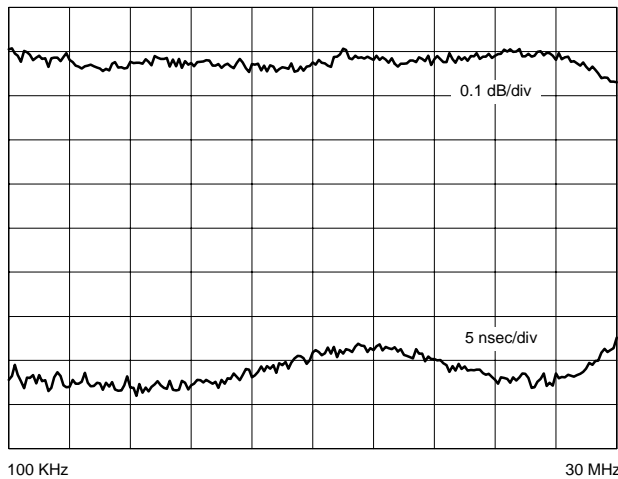


Figure 1

Overall Response $f_c=30$ MHz
(10 dB/div) 100 KHz to 100 MHz

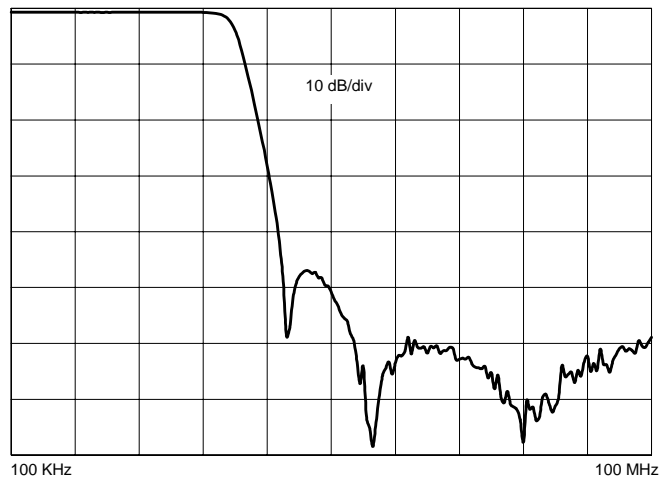


Figure 2

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Series 2338 Lowpass Filter

Specifications

Parameter	Specification	
Filter type	Lowpass	
Insertion Loss	< 1 dB	
End of Passband (fc)	10 MHz to 50 MHz	User Specified
Passband Ripple	< 0.1 dB	
Attenuation at 1.485 x fc	> 40 dB	
Attenuation at 1.810 x fc	> 50 dB	
Group Delay Ripple	Consult Factory	
Source and Load	75 Ω	Others available

Physical Dimensions

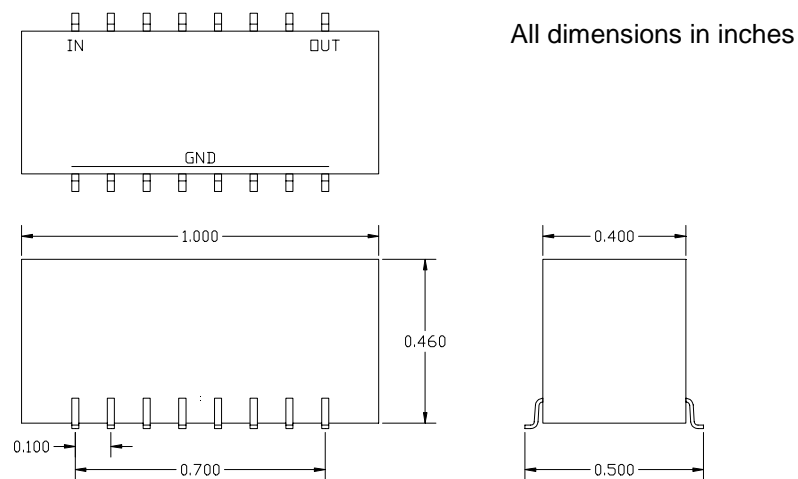

KR Electronics, Inc.
 91 Avenel Street
 Avenel, NJ 07001

Web www.krfilters.com
 Email sales@krfilters.com
 Phone (732) 636-1900
 Fax (732) 636-1982