



**CHENMKO ENTERPRISE CO., LTD**

**SURFACE MOUNT**

**P-Channel Enhancement Mode Field Effect Transistor**

**VOLTAGE 50 Volts CURRENT 0.13 Ampere**

**CHT84WPT**

*Lead free devices*

#### APPLICATION

- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.

#### FEATURE

- \* Small surface mounting type. (SC-70/SOT-323)
- \* High density cell design for low R<sub>DSON</sub>.
- \* Suitable for high packing density.
- \* Rugged and reliable.
- \* High saturation current capability.
- \* Voltage controlled small signal switch.


#### CONSTRUCTION

- \* P-Channel Enhancement


#### MARKING

- \* AW

#### CIRCUIT



**SC-70/SOT-323**

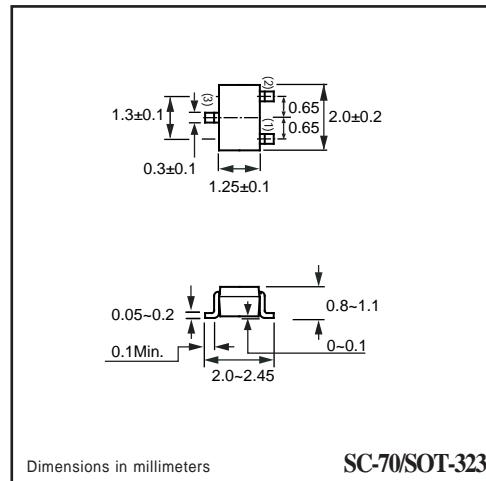

Dimensions in millimeters

**SC-70/SOT-323**

#### Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

Symbol	Parameter	CHT84WPT	Units
V <sub>DSS</sub>	Drain-Source Voltage	-50	V
V <sub>GSS</sub>	Gate-Source Voltage - Continuous	±20	V
I <sub>D</sub>	Maximum Drain Current - Continuous	-0.13	A
P <sub>D</sub>	Maximum Power Dissipation	200	mW
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Temperature Range	-55 to 150	°C

#### Thermal characteristics

R <sub>θJA</sub>	Thermal Resistance, Junction-to-Ambient	625	°C/W
------------------	---	-----	------

2004-03

## RATING CHARACTERISTIC CURVES ( CHT84WPT )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
--------	-----------	------------	-----	-----	-----	-------

### OFF CHARACTERISTICS

$BV_{DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = -250 \mu\text{A}$	-50	-75		V
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS} = -50 \text{ V}, V_{GS} = 0 \text{ V}$			-15	$\mu\text{A}$
		$V_{DS} = -25 \text{ V}, V_{GS} = 0 \text{ V}$			-100	nA
$I_{GSSF}$	Gate - Body Leakage, Forward	$V_{GS} = 20 \text{ V}, V_{DS} = 0 \text{ V}$			10	nA
$I_{GSSR}$	Gate - Body Leakage, Reverse	$V_{GS} = -20 \text{ V}, V_{DS} = 0 \text{ V}$			-10	nA

### ON CHARACTERISTICS (Note 1)

$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 1.0 \text{ mA}$	-0.8	-1.6	-2.0	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS} = -5.0 \text{ V}, I_D = 0.1 \text{ A}$		6	10	$\Omega$
$g_{FS}$	Forward Transconductance	$V_{DS} = -25 \text{ V}, I_D = 100 \text{ mA}$	0.05			S

### DYNAMIC CHARACTERISTICS

$C_{iss}$	Input Capacitance	$V_{DS} = -25 \text{ V}, V_{GS} = 0 \text{ V}, f = 1.0 \text{ MHz}$			45	pF
$C_{oss}$	Output Capacitance				25	
$C_{rss}$	Reverse Transfer Capacitance				12	
$t_{on}$	Turn-On Time	$V_{DD} = -30 \text{ V}$ $I_D = -270 \text{ mA}, V_{GS} = -10 \text{ V}, R_{GEN} = 50 \Omega$		10		nS
	Turn-Off Time			18		

## RATING CHARACTERISTIC CURVES ( CHT84WPT )

### Typical Electrical Characteristics

Figure 1. On-Region Characteristics

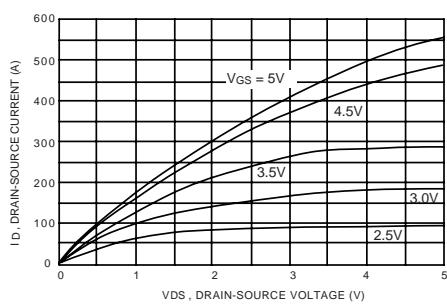


Figure 2. On-Resistance Variation with Temperature

