

KR Electronics 2580

General Description


KR 2580 is a 30 MHz lowpass filter with group delay equalization. Other bandwidths available. Please consult the factory. For filter with Sin(x)/x compensation see KR 2580-S.

Features


- SIP Package
- Sharp Transition to Stopband
- Group Delay Equalized
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay
(0.2 dB/div and 3nsec/div)

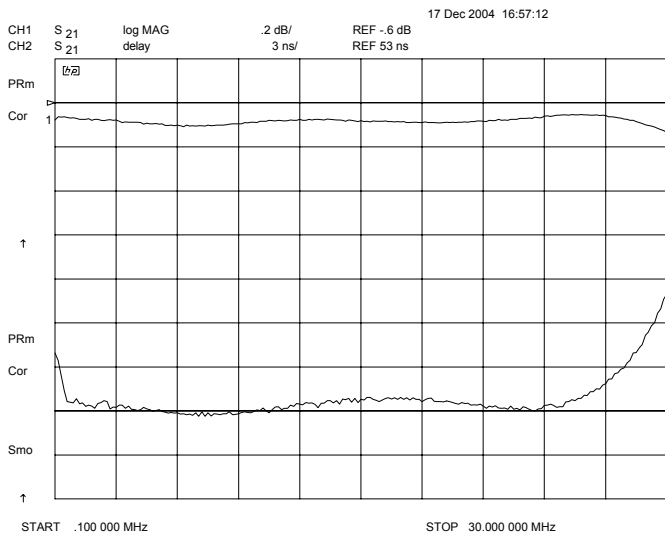

Overall Response
(10 dB/div)

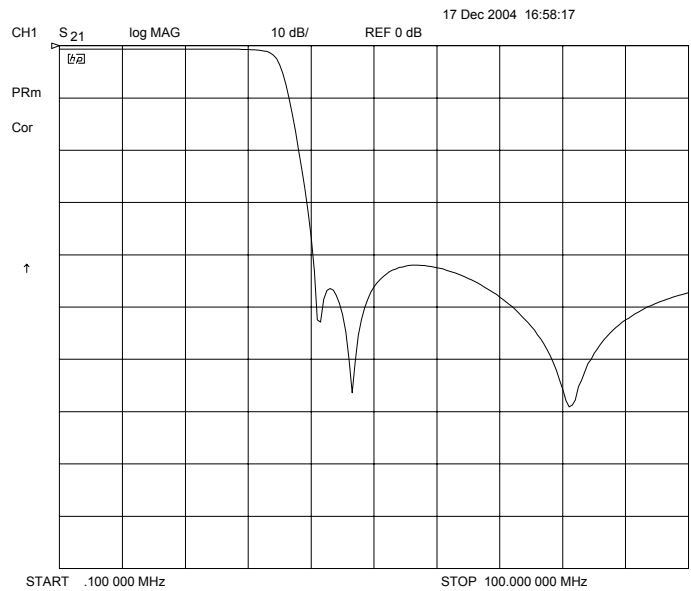

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2580

Specifications

Parameter	Specification	
Filter type	Lowpass	
End of Passband	30 MHz	
Insertion Loss	< 1 dB (0.7 dB typical)	
Passband Ripple	< 0.2 dB	
Attenuation at 43.5 MHz	> 40 dB	
Sin(x)/x	No	See KR 2580-S for Sin(x)/x compensated filter
Group Delay Ripple to 27 MHz	< 3 nsec	
Source and Load	50 Ω	

Physical Dimensions

