

**Silicon NPN Darlington Power Transistors**

**2SD2495**

**DESCRIPTION**

- With TO-220F package
- Complement to type 2SB1626

**APPLICATIONS**

- For audio, series regulator and general purpose applications

**PINNING**

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

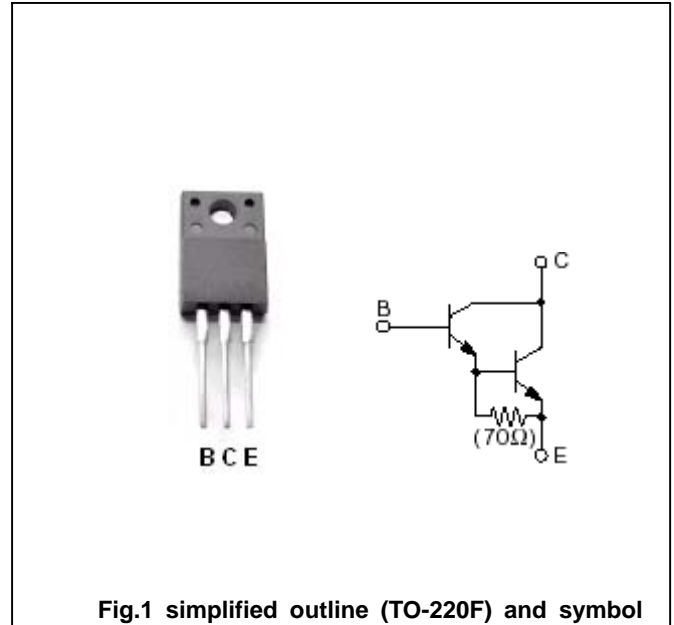


Fig.1 simplified outline (TO-220F) and symbol

**Absolute maximum ratings (Ta=25 °C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	110	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	110	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	5	V
I <sub>C</sub>	Collector current		6	A
I <sub>B</sub>	Base current		1	A
P <sub>C</sub>	Collector dissipation	T <sub>C</sub> =25	30	W
T <sub>j</sub>	Junction temperature		150	
T <sub>stg</sub>	Storage temperature		-55~150	

## Silicon NPN Darlington Power Transistors

## 2SD2495

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =50mA ; I <sub>B</sub> =0	110			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =5A; I <sub>B</sub> =5mA			2.5	V
V <sub>BEsat</sub>	Emitter-base saturation voltage	I <sub>C</sub> =5A; I <sub>B</sub> =5mA			3.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =110V; I <sub>E</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V; I <sub>C</sub> =0			0.1	mA
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =5A ; V <sub>CE</sub> =4V	5000			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =0.5A ; V <sub>CE</sub> =12V		60		MHz
C <sub>OB</sub>	Collector output capacitance	f=1MHz; V <sub>CB</sub> =10V		55		pF

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =5A; I <sub>B1</sub> =-I <sub>B2</sub> =5mA V <sub>CC</sub> =30V ,R <sub>L</sub> =6		0.8		μs
t <sub>s</sub>	Storage time			6.2		μs
t <sub>f</sub>	Fall time			1.1		μs

◆ h<sub>FE</sub> Classifications

O	p	Y
5000-12000	6500-20000	15000-30000

Silicon NPN Darlington Power Transistors

2SD2495

PACKAGE OUTLINE

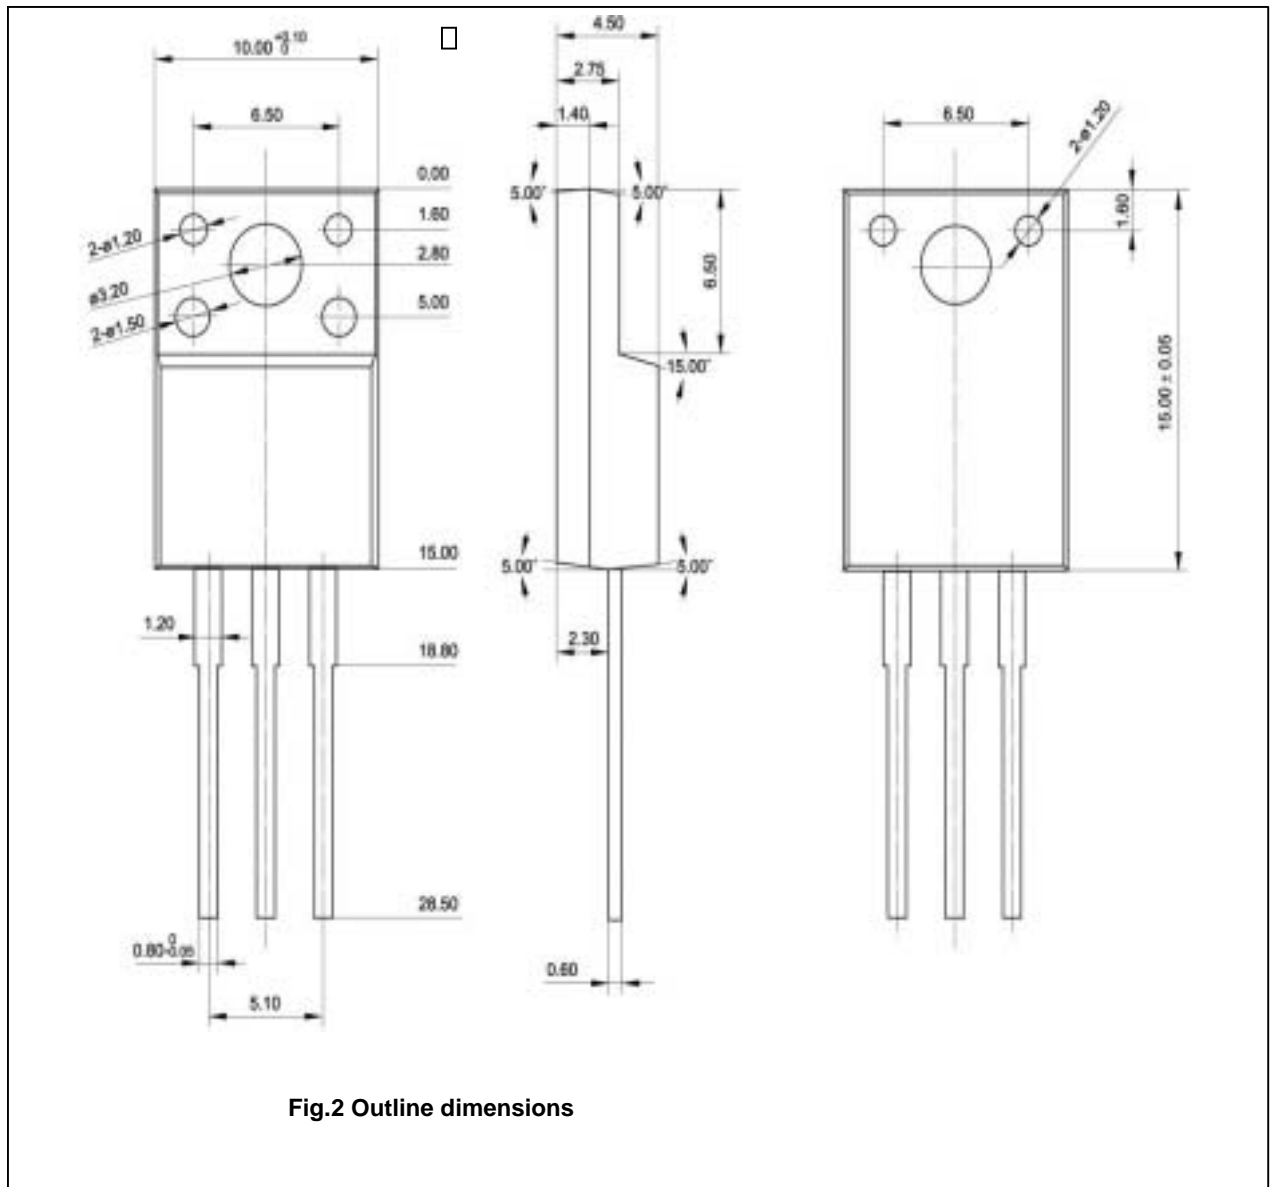


Fig.2 Outline dimensions