

Cascadable Amplifier 10 to 1000 MHz

Rev. V3

Features

- HIGH DYNAMIC RANGE
- HIGH OUTPUT POWER: +16 dBm (TYP.)
- HIGH THIRD ORDER I.P.: +30 dBM (TYP.)
- LOW NOISE: 3.8 dB (TYP.)

Description

The A18-1 RF amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.

This single stage GaAs FET feedback amplifier design displays impressive performance characteristics over a broadband frequency range. An RF choke is used for DC power supply decoupling.


Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

Ordering Information

Part Number	Package	
A18-1	TO-8	
SMA18-1	Surface Mount	
CA18-1	SMA Connectorized **	

^{**} The connectorized version is not RoHs compliant.

Product Image

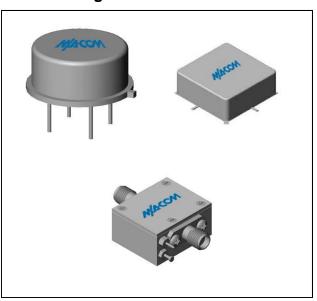

Electrical Specifications: $Z_0 = 50\Omega$, $V_{CC} = +15 V_{DC}$

Typical Guaranteed **Parameter Units** 25°C 0° to 50°C -54º to +85ºC* MHz 5-1100 10-1000 10-1000 Frequency Small Signal Gain (min) dB 14.7 14.0 13.5 Gain Flatness (max) dΒ ±0.3 ±0.5 ±1.0 Reverse Isolation dB 17 Noise Figure (max) dΒ 3.8 5.0 5.5 **Power Output** dBm 16.0 15.0 14.5 @ 1 dB comp. (min) IP3 dBm +30 IP2 dBm +42 Second Order Harmonic IP dBm +45 VSWR Input / Output (max) 1.5:1 / 1.5:1 1.8:1 / 1.8:1 2.0:1 / 2.0:1 DC Current @ 15 Volts (max) mΑ 44 46

Absolute Maximum Ratings

Parameter	Absolute Maximum
Storage Temperature	-62°C to +125°C
Case Temperature	+125°C
DC Voltage	+17 V
Continuous Input Power	+13 dBm
Short Term Input power (1 minute max.)	50 mW
Peak Power (3 µsec max.)	0.5 W
"S" Series Burn-In Temperature (case)	+125°C

Thermal Data: $V_{CC} = +15 V_{DC}$

Parameter	Rating
Thermal Resistance θ_{jc}	145°C/W
Transistor Power Dissipation P _d	0.4 W
Junction Temperature Rise Above Case T _{jc}	+58°C

^{*} Over temperature performance limits for part number CA18-1, guaranteed from 0°C to +50°C only.

[•] North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400

India Tel: +91.80.4155721
China Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.




Cascadable Amplifier 10 to 1000 MHz

Rev. V3


Typical Performance Curves at +25°C

Gain 믁 10 100 200 1200 400 600 800 1000 FREQUENCY - MHz Noise Figure NOISE FIGURE 10 100 200 600 800 1008 1200 FREQUENCY - MHz Power Output* 10 108 200 800 1000 1200 FREQUENCY - MHz * at 1 dB Gain Compression Intercept Point 2ND BARMONIC NO DROEK TWO-TONE SRD ORDER TWO TONE 10 100 200 600 VSWR 3.0 INPUT NS 2.0 10 100 200 600 800 1000 1200 FREQUENCY - MHz


Outline Drawing: TO-8 *

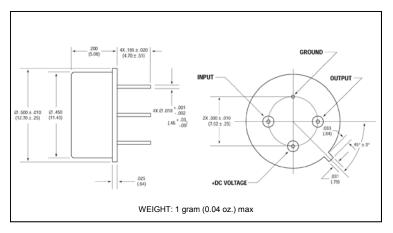

Outline Drawing: Surface Mount

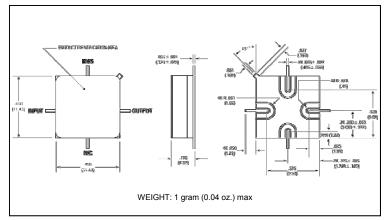

Outline Drawing: SMA Connectorized

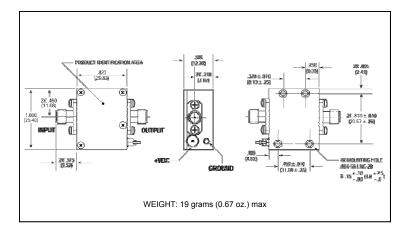

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

- China Tel: +86.21.2407.1588 • India Tel: +91.80.4155721
- Visit www.macomtech.com for additional data sheets and product information.