


## **Technical Data Sheet**

## 0.8mm Height Flat Top Phototransistor

### PT19-21B/L41/TR8

#### **Features**

- Fast response time
- High photo sensitivity
- Small junction capacitance
- Pb free
- The product itself will remain within RoHS compliant version.



### **Descriptions**

 PT19-21B/L41/TR8 is a phototransistor in miniature SMD package which is molded in a black with flat top view lens.
 The device is Spectrally matched to visible and infrared emitting diode.

### **Applications**

- Miniature switch
- Counters and sorter
- Position sensor
- Infrared applied system
- Encoder

#### **Device Selection Guide**

Device No: DTT-019-165


LED Part No.	Chip	Lens Color	
	Material	Lens Color	
PT	Silicon	Black	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 1 of 10

Prepared date: 07-25-2005 Prepared by: jaine tsai



## **Package Dimensions**

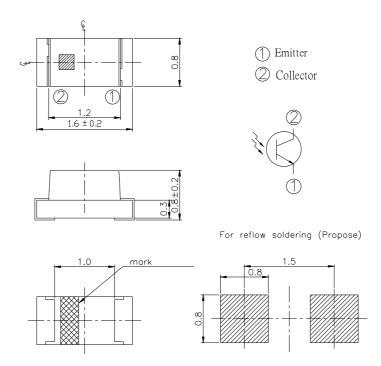

**Notes:** 1.All dimensions are in millimeters

2. Tolerances unless dimensions ±0.1mm

## Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	$V_{CEO}$	30	V
Emitter-Collector-Voltage	$V_{ECO}$	5	V
Collector Current	$I_{C}$	20	mA
Operating Temperature	$T_{opr}$	-25 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Soldering Temperature *1	$T_{sol}$	260	$^{\circ}\!\mathbb{C}$
Power Dissipation at(or below)	$P_{c}$	75	mW
25°C Free Air Temperature			

**Notes:** \*1:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 2 of 10



# **Electro-Optical Characteristics (Ta=25℃)**

Parameter	Symbol	Condition	Min	Тур	Max	Unit
Rang Of Spectral Bandwidth	λ 0.5		730		1100	nm
Wavelength Of Peak Sensitivity	λp			940		nm
Collector-Emitter Breakdown Voltage	$\mathrm{BV}_{\mathrm{CEO}}$	$I_C$ =100 $\mu$ A Ee=0mW/cm <sup>2</sup>	30			V
Emitter-Collector Breakdown Voltage	$\mathrm{BV}_{\mathrm{ECO}}$	$I_E=100 \mu A$ Ee=0mW/cm <sup>2</sup>	5			V
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =2mA Ee=1m W/cm <sup>2</sup>			0.4	V
Collector Dark Current	$I_{CEO}$	V <sub>CE</sub> =20V Ee=0mW/cm <sup>2</sup>			100	nA
On State Collector Current	$I_{C(ON)}$	$V_{CE}$ =5 $V$ Ee=1 $mW$ /cm <sup>2</sup>	0.3	0.6		mA
Rise Time	$t_{\rm r}$	V <sub>CE</sub> =5V		15		μS
Fall Time	$\mathbf{t}_{\mathrm{f}}$	$I_{C}=1\mathrm{mA}$ $R_{L}=1000\Omega$		15		

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 3 of 10 Device No: DTT-019-165 Prepared date: 07-25-2005 Prepared by: jaine tsai



0

-25

0

## PT19-21B/L41/TR8

## **Typical Electro-Optical Characteristics Curves**

Fig.1 Collector Power Dissipation vs. Ambient Temperature

Collector Power Dissipation Pd (mW)
80
40
20

Fig.2 Spectral Sensitivity

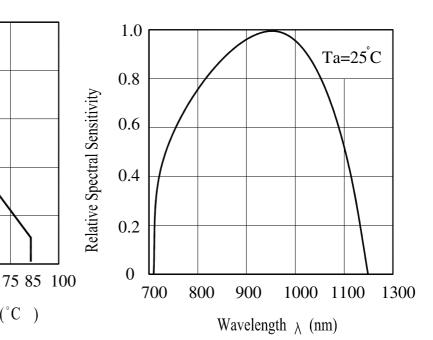


Fig.3 Relative Collector Current vs. Ambient Temperature

25

50

Ambient Temperature Ta (°C )





Fig.4 Collector Current vs. Irradiance



Everlight Electronics Co., Ltd.

Device No: DTT-019-165

http://www.everlight.com

Rev 2

Page: 4 of 10

Prepared date: 07-25-2005

Prepared by : jaine tsai



## **Typical Electro-Optical Characteristics Curves**

Fig.5 Collector Dark Current vs. Ambient


Temperature

10<sup>-6</sup>
5
V<sub>CE</sub>=20V

10<sup>-7</sup>
10<sup>-8</sup>
5
10<sup>-9</sup>
10
0
25
50
75
100

Ambient Temperature Ta (°C)

Fig.6 Collector Current vs. Collector-Emitter

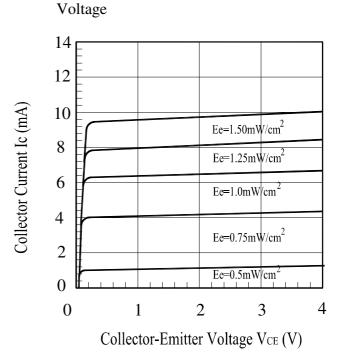

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 5 of 10 Device No: DTT-019-165 Prepared date: 07-25-2005 Prepared by: jaine tsai



#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

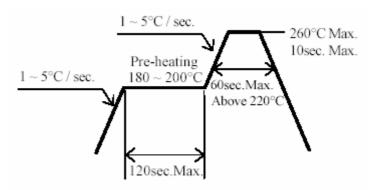

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 6 of 10




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

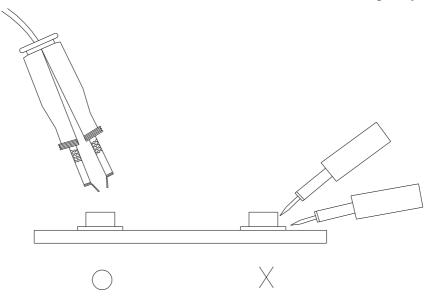

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 7 of 10 Device No: DTT-019-165 Prepared date: 07-25-2005 Prepared by: jaine tsai



### **Reliability Test Item And Condition**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%


LTPD: 10%

NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW Soldering	TEMP. : 260°C±5°C	6Mins	22pcs		0/1
		5secs				
2	Temperature Cycle	H: +100°C 15mins	50Cycles	22pcs	$I_{C(ON)} \leq L \times 0.8$	0/1
		5mins				
		L:-40°C 15mins			L: Lower	
3	Thermal Shock	H :+100°C	50Cycles	22pcs	Specification	0/1
		↓ 10secs			Limit	
		L:- $10^{\circ}$ C 5mins				
4	High Temperature	TEMP. ∶ +100°C	1000hrs	22pcs		0/1
	Storage					
5	Low Temperature	TEMP. : -40°C	1000hrs	22pcs		0/1
	Storage					
6	DC Operating Life	$V_{CE}=5V$	1000hrs	22pcs		0/1
7	High Temperature/	85℃ / 85% R.H	1000hrs	22pcs		0/1
	High Humidity					


Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 8 of 10



### **Package Dimensions**

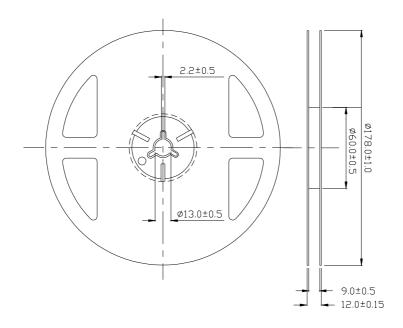

### **Taping Dimensions**

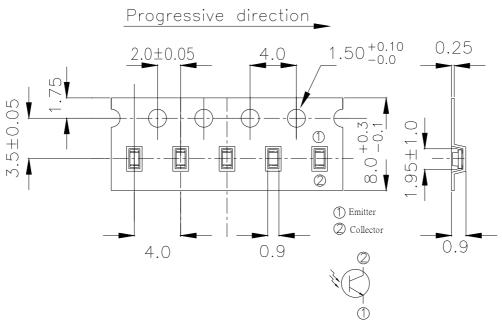

#### Unit:mm

Everlight Electronics Co., Ltd.

Device No: DTT-019-165

http://www.everlight.com

Prepared date: 07-25-2005

Rev 2

Page: 9 of 10

Prepared by: jaine tsai



### **Packing Quantity Specification**

1.3000Pcs/1Volume, 1Volume/1Bag

2.10Boxes/1Carton

### **Label Form Specification**



CPN: Customer's Production Number

P/N: Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

**REF: Reference** 

LOT No: Lot Number

MADE IN TAIWAN: Production Place

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 10 of 10