



VR Miniature Sized series

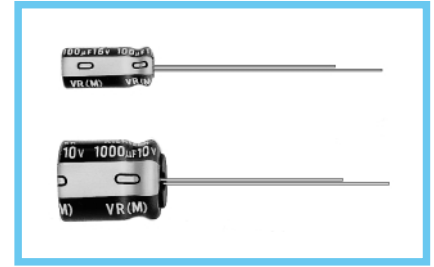

Anti-Solvent Feature (Through 100V only)


- One rank smaller case sizes than VX series.
- Adapted to the RoHS directive (2002/95/EC).



Specifications

| Item | Performance Characteristics | |
|------------------------------|--|--|
| Category Temperature Range | -40 ~ +85°C (6.3V ~ 400V), -25 ~ +85°C (450V) | |
| Rated Voltage Range | 6.3 ~ 450V | |
| Rated Capacitance Range | 0.1 ~ 33000µF | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | |
| Leakage Current | Rated voltage (V) | 6.3 ~ 100V |
| | | 160 ~ 450V |
| tan δ | For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. | |
| | Rated voltage (V) | 6.3 10 16 25 35 50 63 100 160 ~ 315 350 ~ 450 |
| Stability at Low Temperature | Measurement frequency : 120Hz | |
| | Impedance ratio ZT / Z20 (MAX.) | Z-25°C / Z+20°C 5 4 3 2 2 2 2 2 3 4 6 15 Z-40°C / Z+20°C 12 10 8 5 4 3 3 3 4 8 10 — |
| Endurance | After 2000 hours' application of rated voltage at 85°C, capacitors meet the characteristic requirements listed at right. | |
| | Capacitance change | Within ±20% of initial value |
| | Leakage current | Initial specified value or less |
| Shelf Life | After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above. | |
| Marking | Printed with white color letter on black sleeve. | |

Radial Lead Type

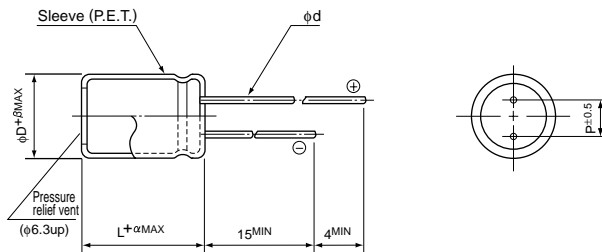


| | φD | 4 | 5 | 6.3 | 8 | 10 | 12.5 | 16 | 18 | 20 | 22 | 25 |
|----|------|-----|-----|-----|-----|-----|------|-----|------|------|------|----|
| P | 1.5 | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 | 10.0 | 10.0 | 12.5 | |
| φd | 0.45 | 0.5 | 0.5 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 | 1.0 | 1.0 | 1.0 | |
| β | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 1.0 | 1.0 | |

| | |
|---|--------------|
| α | (L < 20) 1.5 |
| | (L ≥ 20) 2.0 |

- Please refer to page 21 about the end seal configuration.

Type numbering system (Example : 10V 330µF)

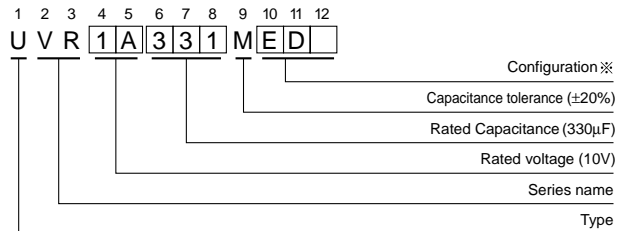

| φ D | Pb-free leadwire Pb-free PET sleeve |
|-----------|--|
| 4 | DD6 |
| 5 | DD |
| 6.3 | ED |
| 8 - 10 | PD |
| 12.5 - 18 | HD |
| 20 - 25 | RD |

Please refer to page 21, 22, 23 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

● Dimension table in next page.

■ Dimensions

| Cap.(μF) | V Code | 6.3 | | 10 | | 16 | | 25 | | 35 | | 50 | | 63 | | 100 | |
|----------|-----------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|---------------------------|
| | | 0J | | 1A | | 1C | | 1E | | 1V | | 1H | | 1J | | 2A | |
| 0.1 | 0R1 | | | | | | | | | | | • 5 × 11 | 13 | | | 5 × 11 | 2.1 |
| 0.22 | R22 | | | | | | | | | | | • 5 × 11 | 2.9 | | | 5 × 11 | 4.7 |
| 0.33 | R33 | | | | | | | | | | | • 5 × 11 | 4.3 | | | 5 × 11 | 7 |
| 0.47 | R47 | | | | | | | | | | | • 5 × 11 | 6.2 | | | 5 × 11 | 10 |
| 1 | 010 | | | | | | | | | | | • 5 × 11 | 17 | | | 5 × 11 | 21 |
| 2.2 | 2R2 | | | | | | | | | | | • 5 × 11 | 28 | | | 5 × 11 | 30 |
| 3.3 | 3R3 | | | | | | | | | | | • 5 × 11 | 35 | | | 5 × 11 | 40 |
| 4.7 | 4R7 | | | | | | | • 5 × 11 | 35 | • 5 × 11 | 40 | • 5 × 11 | 40 | | | 5 × 11 | 45 |
| 10 | 100 | | | | | • 5 × 11 | 50 | • 5 × 11 | 55 | • 5 × 11 | 60 | • 5 × 11 | 60 | 5 × 11 | 65 | 6.3 × 11 | 75 |
| 22 | 220 | • 5 × 11 | 65 | • 5 × 11 | 65 | • 5 × 11 | 75 | • 5 × 11 | 80 | • 5 × 11 | 90 | • 5 × 11 | 95 | 5 × 11 | 100 | 6.3 × 11 | 130 |
| 33 | 330 | • 5 × 11 | 80 | • 5 × 11 | 85 | • 5 × 11 | 90 | • 5 × 11 | 95 | 5 × 11 | 105 | 5 × 11 | 125 | 6.3 × 11 | 140 | 8 × 11.5 | 180 |
| 47 | 470 | • 5 × 11 | 95 | • 5 × 11 | 100 | • 5 × 11 | 110 | • 5 × 11 | 115 | 5 × 11 | 130 | 6.3 × 11 | 155 | 6.3 × 11 | 170 | 10 × 12.5 | 230 |
| 100 | 101 | • 5 × 11 | 135 | • 5 × 11 | 145 | 5 × 11 | 160 | 6.3 × 11 | 190 | 6.3 × 11 | 210 | 8 × 11.5 | 260 | 10 × 12.5 | 300 | 10 × 20 | 370 |
| 220 | 221 | 5 × 11 | 200 | 6.3 × 11 | 240 | 6.3 × 11 | 260 | 8 × 11.5 | 330 | 10 × 12.5 | 385 | 10 × 12.5 | 430 | 10 × 16 | 490 | 12.5 × 25 | 620 |
| 330 | 331 | 6.3 × 11 | 270 | 6.3 × 11 | 290 | 8 × 11.5 | 370 | 10 × 12.5 | 440 | 10 × 12.5 | 490 | 10 × 16 | 590 | 10 × 20 | 710 | 12.5 × 25 | 760 |
| 470 | 471 | 6.3 × 11 | 320 | 6.3 × 11 | 350 | 8 × 11.5 | 440 | 10 × 12.5 | 550 | 10 × 16 | 650 | 12.5 × 20 | 760 | 12.5 × 20 | 900 | 16 × 25 | 1000 |
| 1000 | 102 | 8 × 11.5 | 540 | 10 × 12.5 | 650 | 10 × 16 | 790 | 10 × 20 | 960 | 12.5 × 20 | 1150 | 12.5 × 25 | 1350 | 16 × 25 | 1300 | 18 × 40 | 1380 |
| 2200 | 222 | 10 × 20 | 1000 | 10 × 20 | 1100 | 12.5 × 20 | 1300 | 12.5 × 25 | 1550 | 16 × 25 | 1800 | 16 × 35.5 | 2100 | 18 × 35.5 | 2300 | 22 × 50 | 2400 |
| 3300 | 332 | 10 × 20 | 1190 | 12.5 × 20 | 1450 | 12.5 × 25 | 1700 | 16 × 25 | 1980 | 16 × 35.5 | 2280 | 18 × 35.5 | 2500 | 20 × 40 | 2700 | 25 × 50 | 2900 |
| 4700 | 472 | 12.5 × 20 | 1550 | 12.5 × 25 | 1800 | 16 × 25 | 2100 | 16 × 31.5 | 2450 | 18 × 35.5 | 2700 | 20 × 40 | 2900 | 22 × 50 | 3400 | | |
| 6800 | 682 | 12.5 × 25 | 1920 | 16 × 25 | 2250 | 16 × 35.5 | 2650 | 18 × 35.5 | 2900 | 20 × 40 | 3000 | 22 × 50 | 3500 | 25 × 50 | 3900 | | |
| 10000 | 103 | 16 × 25 | 2350 | 16 × 35.5 | 2700 | 18 × 35.5 | 2950 | 20 × 40 | 3000 | 22 × 50 | 3700 | 25 × 50 | 4000 | | | | |
| 15000 | 153 | 16 × 35.5 | 2850 | 18 × 35.5 | 3100 | 20 × 40 | 3400 | 22 × 50 | 3800 | 25 × 50 | 4300 | | | | | | |
| 22000 | 223 | 18 × 40 | 3350 | 20 × 40 | 3700 | 22 × 50 | 4200 | 25 × 50 | 4500 | | | | | | | | |
| 33000 | 333 | 22 × 50 | 3900 | 22 × 50 | 4500 | 25 × 50 | 4800 | | | | | | | | | | Case size φ D × L (mm) |

| Cap.(μF) | V Code | 160 | | 200 | | 250 | | 315 | | 350 | | 400 | | 450 | |
|----------|-----------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|-----|-----------|-----|
| | | 2C | | 2D | | 2E | | 2F | | 2V | | 2G | | 2W | |
| 0.47 | R47 | 6.3 × 11 | 15 | 6.3 × 11 | 15 | 6.3 × 11 | 15 | | | | | | | | |
| 1 | 010 | 6.3 × 11 | 22 | 6.3 × 11 | 22 | 6.3 × 11 | 22 | 6.3 × 11 | 22 | 6.3 × 11 | 22 | 8 × 11.5 | 25 | 8 × 11.5 | 23 |
| 2.2 | 2R2 | 6.3 × 11 | 33 | 6.3 × 11 | 33 | 6.3 × 11 | 33 | 8 × 11.5 | 33 | 8 × 11.5 | 38 | 10 × 12.5 | 45 | 10 × 12.5 | 35 |
| 3.3 | 3R3 | 6.3 × 11 | 40 | 6.3 × 11 | 40 | 8 × 11.5 | 46 | 10 × 12.5 | 55 | 10 × 12.5 | 55 | 10 × 12.5 | 55 | 10 × 16 | 45 |
| 4.7 | 4R7 | 6.3 × 11 | 50 | 8 × 11.5 | 55 | 8 × 11.5 | 55 | 10 × 12.5 | 65 | 10 × 12.5 | 65 | 10 × 16 | 70 | 10 × 20 | 55 |
| 10 | 100 | 8 × 11.5 | 80 | 10 × 12.5 | 95 | 10 × 16 | 105 | 10 × 20 | 115 | 10 × 20 | 115 | 12.5 × 20 | 130 | 12.5 × 20 | 90 |
| 22 | 220 | 10 × 16 | 155 | 10 × 20 | 170 | 12.5 × 20 | 190 | 12.5 × 20 | 190 | 12.5 × 25 | 200 | 16 × 25 | 240 | 16 × 25 | 165 |
| 33 | 330 | 10 × 20 | 205 | 12.5 × 20 | 230 | 12.5 × 20 | 230 | 16 × 25 | 275 | 16 × 25 | 275 | 16 × 31.5 | 300 | 16 × 35.5 | 230 |
| 47 | 470 | 12.5 × 20 | 270 | 12.5 × 20 | 270 | 12.5 × 25 | 300 | 16 × 25 | 340 | 16 × 35.5 | 380 | 16 × 35.5 | 370 | 18 × 40 | 300 |
| 100 | 101 | 12.5 × 25 | 430 | 16 × 31.5 | 530 | 16 × 31.5 | 520 | 18 × 35.5 | 560 | 18 × 40 | 590 | 20 × 40 | 550 | 22 × 40 | 350 |
| 220 | 221 | 16 × 35.5 | 800 | 18 × 35.5 | 810 | 20 × 40 | 740 | 22 × 50 | 850 | 22 × 50 | 850 | 25 × 50 | 750 | | |
| 330 | 331 | 18 × 40 | 940 | 20 × 40 | 1130 | 22 × 50 | 1170 | 25 × 50 | 1250 | 25 × 50 | 1250 | | | | |
| 470 | 471 | 22 × 40 | 1410 | 22 × 50 | 1490 | 25 × 50 | 1600 | | | | | | | | |
| 1000 | 102 | 25 × 50 | 1900 | | | | | | | | | | | | |

Size 4×11 is available for capacitors marked "•"

In this case, [6] will be put at 12th digit of type numbering system "▲"

Rated Ripple (mArms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

| V | Cap.(μF) | Frequency | | | | |
|-----------|--------------|-----------|------|-------|-------|-------|
| | | ~ 47 | 50Hz | 120Hz | 300Hz | 1 kHz |
| 6.3 ~ 100 | ~ 47 | 0.75 | 1.00 | 1.35 | 1.57 | 2.00 |
| | 100 ~ 470 | 0.80 | 1.00 | 1.23 | 1.34 | 1.50 |
| | 1000 ~ 33000 | 0.85 | 1.00 | 1.10 | 1.13 | 1.15 |
| 160 ~ 450 | 0.47 ~ 220 | 0.80 | 1.00 | 1.25 | 1.40 | 1.60 |
| | 330 ~ 1000 | 0.90 | 1.00 | 1.10 | 1.13 | 1.15 |